

Leyland P76.



P76 Deluxe




P76 Super



P76 Executive



Radial Ply tyres are standard.

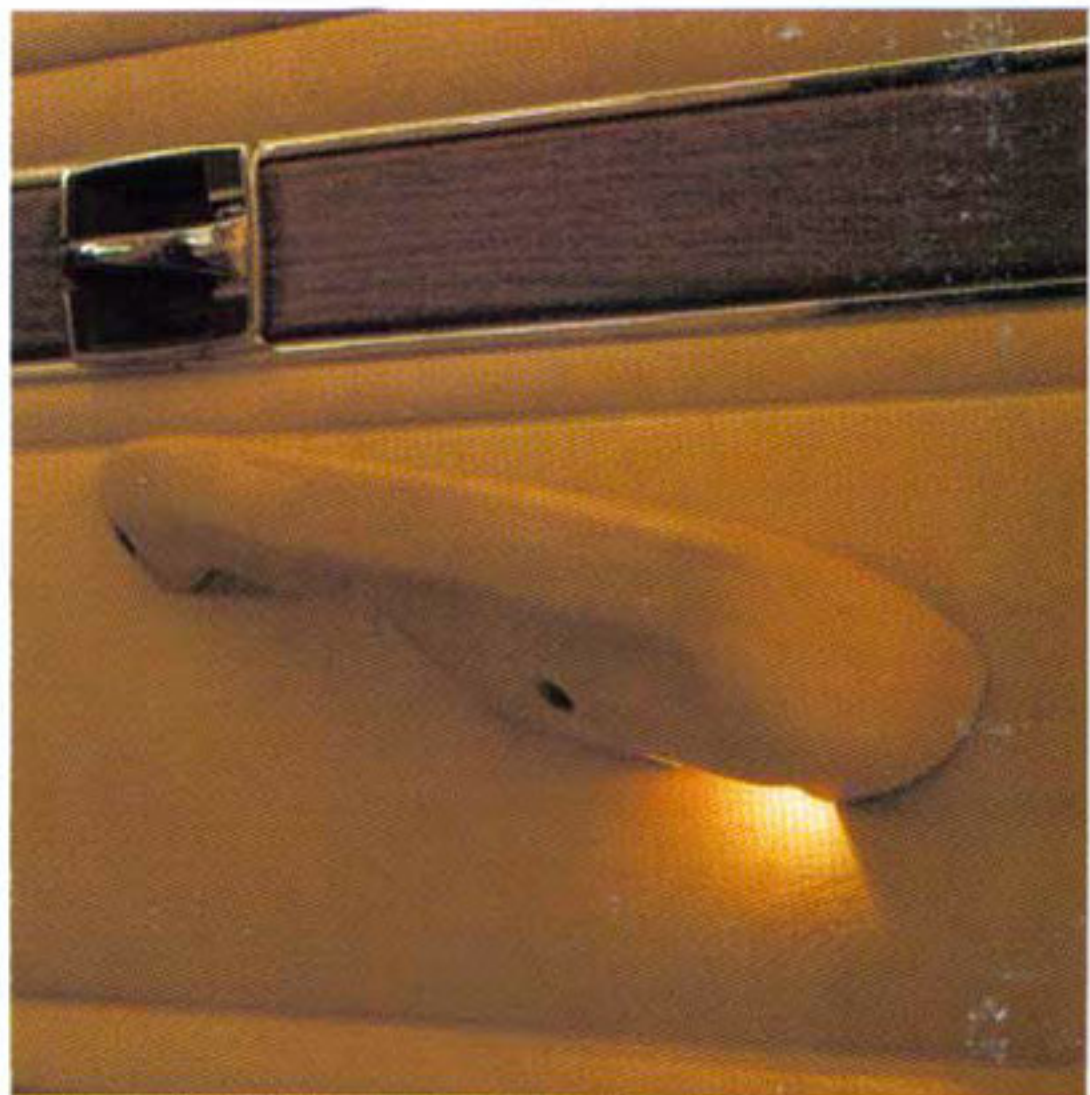

Kerbside illumination light on all armrests.


P76. Anything but average.



Voltmeter: Standard on Super & Executive.



Spacious 36 cu. ft. boot.

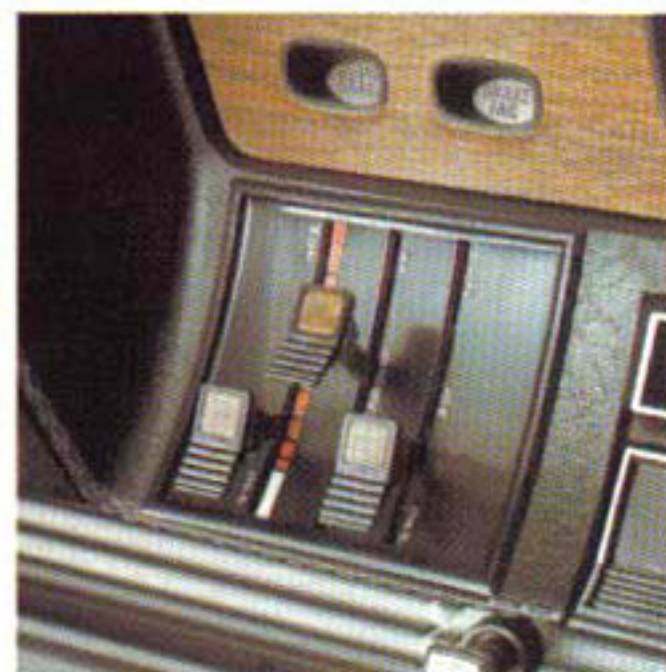

Heater controls: Fast and efficient.



Power disc brakes on all models.



Super wheel trim.



Side safety barrier, all four doors.



Recessed windscreen wipers.



3 speed automatic: Column or floor shift.



Recessed sun visors on Super & Executive.

SAFETY FEATURES

Steering: Offset steering column. Energy absorbing cylinder in steering column. Padded steering wheel hub and spokes.
Brakes: Split circuit—front/rear. Pressure proportioning valve in rear circuit. **Fuel System:** Petrol tank mounted behind the rear axle. **Body Features:** Uncluttered forward vision. Forward hinged bonnet. Full length door impact reinforcements. Zone toughened safety windscreen. Safety glass in side and rear windows. Recessed exterior door handles. Door locks—anti-burst, double action internal locking with recessed handles. Right hand exterior rear vision mirror. **Seating and Interior Trim:** Rear squabs—pressed steel pan. Separate adjustable front head restraints. Seat belts for all passengers. Padded door arm rests on all four doors. Energy absorbing sunvisors. Knock off safety interior anti-glare rear vision mirror (Deluxe only). Knock off

safety interior dual reflective rear vision mirror (Super and Executive). **Instrumentation and Warning Lamps:** Hazard warning indicator lamps. Rocker switch controls. Variable intensity instrument illumination. Door ajar lamp (Executive only). **Windscreen Washer and Wipers:** Two speed wipers concealed beneath bonnet when parked, anti-glare finish. Four jet washers with concealed outlets. Non-lifting windscreen wiper blades. **Exterior Lamps:** Front and rear turn signal repeater lamps. Reversing lamps. Two 7" diameter "Performance Range" headlamps (Deluxe only). Four 5 3/4" diameter "Performance Range" headlamps (Super and Executive). **Tyres:** E78Lx14 cross ply (6 cylinder). E78Sx14 cross ply (V8). 185SRx14 Radial Ply (Executive). **Ventilation and Heating:** Two speed fan. Full width windscreen demisters.

SPECIFICATIONS:

P76 DELUXE

MECHANICAL

Engine:

OHC Six at 2623 c.c.—160.1 cu. in.
Aluminium V8 at 4416 c.c.—269.3 cu. in.

Dimensions:

Wheel base 111.24 in. (2826 mm)
Overall length 192.05 in. (4878 mm)
Overall width 75.2 in. (1910 mm)
Overall height 54.11 in. (1374 mm)
Ground clearance 7.5 in. (191 mm)
Kerb weight 2813 lb. (1279 kg)

Boot Compartment:

Boot capacity 36.0 cu. ft. (1.02 m³)

Suspension:

Front—MacPherson struts with coil springs, dampers and separate anti-roll bar.
Rear—Four link with coil springs and dampers.

Steering:

Rack and pinion.
Turning circle 37 feet (11.30 metres)

Brakes:

Power boosted 10¾" (273 mm) discs on the front; 9" (229 mm) drums on rear.

Windscreen Washer and Wipers:

Full programmed wash; wipers activated with depression of washer button; screen wet prior to wipers operating.

Body Features:

"Through Flow" ventilation through rear quarter extractor vents with direct front footwell and face level ventilation.
Body rust-proofed through "Rotodip."

Seating and Interior Trim:

Pressed steel frames, carrying Pirelli straps covered in full foam pads.
Full width bench seat front and rear with sewn vinyl covers. Vinyl covered rear parcel shelf.
Woodgrained instrument fascia.

Exterior Trim:

Zinc diecast grille.
Stainless steel windscreen and rear window mouldings.

Instruments:

Full range of instruments and warning lamps.

P76 SUPER

MECHANICAL

Engine:

OHC Six at 2623 c.c.—160.1 cu. in.
Aluminium V8 at 4416 c.c.—269.3 cu. in.

Dimensions:

Wheel base 111.24 in. (2826 mm)
Overall length 192.05 in. (4878 mm)
Overall width 75.2 in. (1910 mm)
Overall height 54.11 in. (1374 mm)
Ground clearance 7.5 in. (191 mm)
Kerb weight 2838 lb. (1290 kg)

Boot Compartment:

Boot capacity 36.0 cu. ft. (1.02 m³)

Suspension:

Front—MacPherson struts with coil springs, dampers and separate anti-roll bar.
Rear—Four link with coil springs and dampers.

Steering:

Rack and pinion.
Turning circle 37 feet (11.30 metres)

Brakes:

Power boosted 10¾" (273 mm) discs on the front; 9" (229 mm) drums on rear.

Windscreen Washer and Wipers:

Full programmed wash; wipers activated with depression of washer button; screen wet prior to wipers operating.

Body Features:

"Through Flow" ventilation through rear quarter extractor vents with direct front footwell and face level ventilation.
Body rust-proofed through "Rotodip."

Seating and Interior Trim:

Pressed steel frames, carrying Pirelli straps covered in full foam pads.
Bucket seats with moulded back panels.
Front centre arm rest and stowage console.
Rear centre folding arm rest.
Colour keyed loop pile carpet.
Padded rear parcel shelf.

Exterior Trim:

Recessed energy absorbing sunvisors.
Woodgrained dash and instrument fascia.
Padded door waistrail cappings.
Zinc diecast grille.
Stainless steel windscreen and rear window mouldings.

Instruments:

Full range of instruments and warning lamps.
Plus:
Clock.
Trip odometer.
Battery condition gauge.

Courtesy Lamps:

Front ashtray lamp. Boot lamp. Under bonnet lamp. Glove box lamp.

P76 EXECUTIVE

MECHANICAL

Engine:

Aluminium V8 at 4416 c.c.—269.3 cu. in.

Dimensions:

Wheel base 111.24 in. (2826 mm)
Overall length 194.3 in. (4935 mm)
Overall width 75.2 in. (1910 mm)
Overall height 54.11 in. (1374 mm)
Ground clearance 7.5 in. (191 mm)
Kerb weight 2905 lb. (1320 kg)

Boot Compartment:

Boot capacity 36.0 cu. ft. (1.02 m³)

Suspension:

Front—MacPherson struts with coil springs, dampers and separate anti-roll bar.
Rear—Four link with coil springs and dampers.

Steering:

Rack and pinion.
Turning circle 37 feet (11.30 metres)

Brakes:

Power boosted 10¾" (273 mm) discs on the front; 9" (229 mm) drums on rear.

Windscreen Washer and Wipers:

Full programmed wash; wipers activated with depression of washer button; screen wet prior to wipers operating.

Body Features:

"Through Flow" ventilation through rear quarter extractor vents with direct front footwell and face level ventilation.
Body rust-proofed through "Rotodip."

Seating and Interior Trim:

Pressed steel frames, carrying Pirelli straps covered in full foam pads.
Bucket seats with moulded back panels.
Front centre arm rest and stowage console.
Rear centre folding arm rest.
Colour keyed cut pile carpet.
Padded rear parcel shelf.

Exterior Trim:

Recessed energy absorbing sunvisors.
Woodgrained dash and instrument fascia.
Padded door waistrail cappings.
Zinc diecast grille.
Stainless steel windscreen and rear window mouldings.

Instruments:

Full range of instruments and warning lamps.
Plus:
Clock.
Trip odometer.
Battery condition gauge.

Courtesy Lamps:

Front ashtray lamp.
Boot lamp.
Under bonnet lamp.
Glove box lamp.
Rear quarter reading/courtesy lamp with integral switch, rear door operated.
Kerbside illumination lamps in door arm rests, door operated. Door ajar lamp.

Audio Equipment:

Push button radio with fascia mounted speaker. Power aerial.

Boot Compartment:

Carpet floor covering. Spare tyre cover.

BUYER PROTECTION PLAN

1. When you buy a new car from a Leyland Australia Dealer, Leyland Australia guarantees you it will pay for the repair or replacement of any part it supplies, except for tyres, defective in material or workmanship. This guarantee is made for 12 months from the date the car is first registered, or 20,000 kilometres whichever comes first. All we require is that the car be properly maintained and cared for under normal use in Australia, and these repairs or replacements be made by a Leyland Australia dealer.

2. A loaner car service is available from your selling dealer if pre-arranged guarantee repairs effected by him take overnight.
A nominal charge will be made for insurance cover.

3. A free reverse charge telephone call to Leyland Australia.

LEYLAND AUSTRALIA



Leyland P76.
Anything but average.