Tough and purposeful, the Pickup has a very distinct personality. And, with the choice of three body styles and three grades, you can easily make that personality match yours. Plus the opportunity to choose your favourite from nine different colours. So take your time and enjoy creating your perfect Pickup.



PICKUP 4x2 Single Cab - standard features

- Rear wheel driveLimited slip differential
- EXTERIOR
- Chrome grilleRear mudguards15" steel wheels

LOAD AREA

- External bulkhead protection
 External lashing hooks
- One-handed tailgate release
- INSTRUMENTATION
- Digital clockTrip meter (with 2 settings)

SAFETY and SECURITY

- Driver's airbagFront seatbelt pretensioner
- NATS engine immobiliserSide impact door bars
- 3-point seat belts (x2) centre lap belt (x1)
- INTERIOR
- Cloth upholstery
- Front bench seat (seats 3) Stereo radio cassette with 2 audio speakers
 Vinvl floor mat
- CONVENIENCE
- Tilt adjustable steering
 Cigar lighter/ashtray
 speed and intermittent windscreen wipers
- In-dash twin cup holder
- Front door pockets
- Power assisted steering

PICKUP 4x4 Single Cab - features additional to Single Cab 4x2

EXTERIOR

- Front and rear mudguards
 Black wheel arch extensions

DRIVE TRAIN

- · Part-time 4 wheel drive
- Low ratio gear box

King Cab - features additional to Single Cab 4x4

LOAD AREA

 Smooth outer cargo bed with internal lashing hooks

INTERIOR

- Extended cab with opening rear side windows
 Rear jump seats (x2) with lap belts
- Centre floor console with lid
 Individual front seats (x2)
- Tachometer
- Carpeted floor Heated rear window

Double Cab - features additional to King Cab 4x4

EXTERIOR

 Extended cab with rear passenger doors INTERIOR

Rear bench seat

- 3-point rear seatbelts (x2)
- Centre lap belt (rear)

• Rear head restraints (x2) CONVENIENCE

- Electrically adjustable door mirrors
- Remote central door locking
 Front and rear electric windows with one touch and anti-trap device (driver only)

NAVARA PICKUP 4x4 King Cab - features additional to King Cab 4x4

EXTERIOR

- Aluminium side steps
 16" alloy wheels (x4)
- Monotone metallic paint (optional two-tone)
 Chrome door mirrors
- Body coloured bumpers and wheel arch

Deletion of bulkhead from rear of cab

INTERIOR

- Leather steering wheel and gear/transfer knobs
- Map lamps
 White instrument dials

CONVENIENCE

- Tront electric windows with one touch and anti-trap device (driver only)
 Single in-dash CD radio with 2 speakers
 Heated door mirrors
- Remote central door lockingClimate control air conditioning
- SAFETY
- Anti-lock brakes (ABS) Passenger airbag

Double Cab features additional to Navara King Cab

INTERIOR

- Rear bench seat3-point rear seatbelts (x2)
- Centre lap belt (rear)
- Rear head restraints (x2)
- Rear electric windows

CONVENIENCE

- Single in-dash CD radio with 4 speakers
 Rear electric windows

NAVARA OUTLAW PICKUP 4x4 Double Cab - features additional to Navara **Double Cab**

EXTERIOR

- Roof rails
- Rear styling bar*
 Body coloured on vehicles ordered in KH3 and KY0
- Silver on all other body colours
- Tube-type side steps17" alloy wheels

INTERIOR

Satin effect c-cluster trim

*NAVARA OUTLAW can be specified without rear styling



Alabaster White (QM1) S



Kuro Black (KH3)



Chilli Pepper (AX6)



Pacific Blue (BY5)



Blade Silver (KY0)



Shiraz (AY4)



Aruba Blue (BW6)





Two-tone Aruba Blue P / Blade Silver M (2Y9)



COLOURS & UPHOLSTERY

S solid

M metallic

P pearl metallic



BodyColour		Standard	Navara	Navara Outlaw
Alabaster White (QM1)	S	•		
Kuro Black (KH3)	S			•
Chilli Pepper (AX6)	S	•		
Pacific Blue (BY5)	S	•		
Blade Silver (KY0)	M	0	•	•
Shiraz (AY4)	Р		•	
Aruba Blue (BW6)	Р			•
Two-tone Aruba Blue/Blade Silver (2Y9)	P/M	1	0	
Two-tone Kuro Black/Blade Silver (2Y7)	S/M		0	


TECHNICAL SPECIFICATIONS

M o d e l Body type			4x2		4x4		4x4 Navara		4x4 Navara Outlaw			
			Single Cab	Single Cab	King Cab	Double Cab	King Cab	Double Cab	Double Cab			
WEIGHTS AND DIMENSIONS Seating capacity		persons	3	3	4	5	4	5	5			
Kerb weight ¹		kg	1510	1745	1745	1750	1780	1790	1810			
Gross Vehicle Weight		kg	2630	2860	2860	2860	2860	2860	2860			
Max. pay load ¹		kg		1115	1115	1110						
Max. axle weight	front		1120				1080	1070	1050			
	rear	kg	1140	1380	1380	1380	1380	1380	1380			
Max. trailer weight ² b		kg	1700	1800	1800	1800	1800	1800	1800			
	braked	kg	2000	2800	3000	3000	3000	3000	3000			
	unbraked	kg	750	750	750	750	750	750	750			
Max. vert. load on coupling point		kg	80	112	120	120	120	120	120			
Overall length		mm	5020	5020	5045	4955	5045	4955	4955			
Overall width		mm	1690	1825	1825	1825	1825	1825	1825			
Overall height		mm	1610	1700	1700	1715	1700	1715	1820			
Wheelbase		mm	2952	2947	2947	2947	2947	2947	2947			
Track	front	mm	1395	1525	1525	1525	1525	1525	1525			
	rear	mm	1390	1505	1505	1505	1505	1505	1505			
Cargo area	min. length	mm	2235	2235	1865	1395	1865	1395	1395			
	min. width	mm	1465	1465	1390	1390	1390	1390	1390			
	min. width (Between wheelarches)	mm	1060	1060	1060	1060	1060	1060	1060			
	min. height	mm	430	430	435	435	435	435	435			
Cargo area (VDA)	Timin Trongine	litres	140	140	112	84	112	84	84			
Fuel tank capacity		litres	75	75	75	75	75	75	75			
Wheel size		111103	15 x 5.5K	16 x 6J	16 x 6J	16 x 6J	16 x 7JJ	16 x 7JJ	17 x 8JJ			
Tyre size			195R15C	205R16C	205R16C	205R16C	255/70R16	255/70R16	255/60R17			
ENGINE			195R15C	205R F6C	205R16C	205R16C	255/70R16	255/70R16	25576UR17			
Туре			1			YD25DDTi						
No of cylinders, configuration			<u> </u>									
			4, in line									
Valves per cylinder												
Air intake system			Turbocharged, intercooler									
Bore x stroke			89.0 x 100.0									
Displacement		CC	2488									
Max. power ³		HP (kW) / rpm	133 (98) / 4000									
Max. torque ³		Nm (lb.ft) / rpm				304 (224) / 2000						
Compression ratio						18						
Fuel type/supply						Diesel/Direct injection						
Emission control system			Oxidation catalyst, EGR									
DRIVE TRAIN												
Clutch type			Dry plate, hydraulic				, hydraulic					
Transmission				5-speed manual 5-speed manual								
Gear ratio	1st		3.5804									
	2nd		2.0779									
	3rd		1.3607									
	4th		1.0000									
	5th		0.7603									
	Reverse		3.6364									
Transfer ratio			- high: 1.0000 - low: 2.0201									
Final drive ratio			3.9000 4.6250									
Driven wheels CHASSIS			Rear				rear in 2WD mode					
	front		Independent, double wishbone arm, torsion bar, stabilizer bar									
Suspension	rear		Rigid axle, leaf springs									
Stooring	ıcaı											
Steering Proking system			Recirculating ball, power assisted with steering damper Ventilated disc front, drum rear, power assisted with electronic 3 channel, 4 sensor ABS (Navara grades only)									
Braking system PERFORMANCE				ventilated disc fr	om, arum rear, power assi	steu with electronic 3 chanr	iei, 4 serisur ABS (Navara	grades only)				
		1 (1 (1)	100 (170)			100	(100)					
Max. speed		mph (km/h)	106 (170) 11.7 13.3									
Acceleration 0 - 100 km/h		seconds metres	11.7 12.2				2.8					
Min. turning circle (kerb to kerb)												

¹⁾ Figures in accordance with EC directive. Kerb weight condition is without driver and including coolant, oils, fuel, spare wheel and tools. Payload will be reduced depending on the options and/or accessories installed.

2) When a vehicle is fitted with a towbar, it is recommended that a tachograph is fitted, since the ability to tow a trailer giving a Gross Train Weight (GVW + trailer weight) of over 3,500kg without a tachograph could be considered to be contrary to EU and UK road traffic legislation.

3) In accordance with 1999/99/EC.

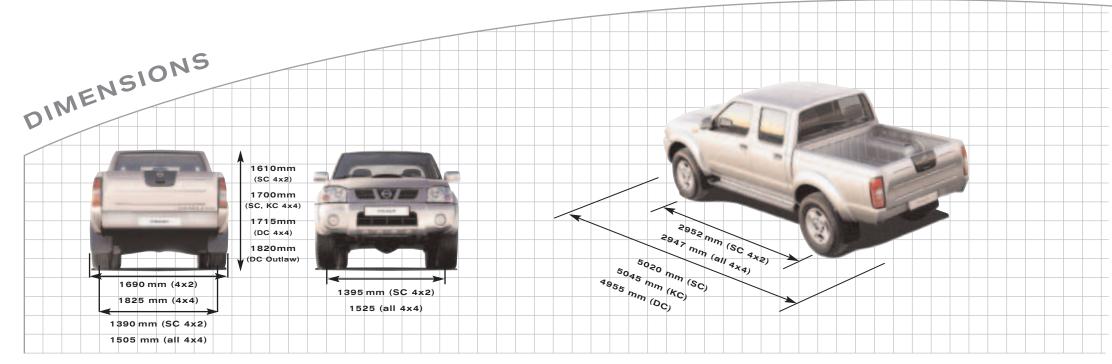

SC= Single Cab KC= King Cab DC= Double Cab



Maximum wading depth 450 mm

Approach angle 31°


Departure angle 31°

Ground clearance 215 mm

Ramp angle 25°



Maximum lateral inclination 48°



Maximum climbable gradient 39°

All figures for 4x4 version