ENGINE	SWB & Window Van, 2.0L 4Cyl SOHC, 16 Valve Petrol with 'Balance Shaft'	MWB, 2.0L 4 Cyl SOHC, 16 Valve Petrol with 'Balance Shaft'	MWB Walk Thru, 2.4L 4 Cyl SOHC, 16 Valve Petrol with 'Balance Shaft'		
Bore x stroke	85mm x 88mm	85mm x 88mm	86.5mm x 100mm		
Capacity	1997cm ³	1997cm ³	2351cm ³		
Compression ratio	9.5:1	9.5:1	9.5:1		
Fuel system	MPI fuel inject	MPI fuel inject	ECI multi fuel inject		
Maximum power (DIN)	83kW @ 5250rpm	83kW @ 5250rpm	97kW @ 5500rpm		
Maximum torque (DIN)	165Nm @ 4000rpm	165Nm @ 4000rpm	192Nm @ 2500rpm		
ELECTRICAL SYSTEM					
Battery	12V-27 AH	12V-27 AH	12V-36 AH		
Alternator	12V-75A	12V-75A	12V-90A		
CLUTCH					
Manual	Single dry plate with diaphragm spri	ng			
Automatic	3 element torque converter with lock	c-up			
BRAKES					
Front	Ventilated discs				
Rear	Drums, leading and trailing shoes with load sensing proportioning valve				
SUSPENSION					
Front	Independent - wishbone, torsion bar				
Rear	Rigid - elliptic leaf spring				
STEERING					
Type	Power assisted Rack and Pinion (power steering optional on SWB manual)				
WHEELS					
Туре	Pressed Steel -14" x 5"	Pressed Steel -14" x 5"	Pressed Steel -14" x 5.5"		
TYRES					
Size	14" 185R14C-8PR	14" 185R14C-8PR	14" 185R14C-8PR		

MECHANICAL	SWB Van	SWB Window	MWB Van	MWB Walk Thru
2.0 litre petrol 16 valve MPI Fuel Injected Engine (LPG compatible)	•	•	•	_
2.4 litre petrol 16 valve ECI MPI (LPG compatible)	-	_	_	•
5 speed manual transmission	•	•	•	•
4 speed automatic transmission	_	_	_	0
Engine immobiliser	_	_	_	•
Power steering	o	•	•	•

standard o optional — not available



Mitsubishi Motors Australia Ltd. offers a 5 year/130,000km* (whichever comes first) New Vehicle Warranty, a 10 year/160,000km* (whichever comes first) Powertrain Warranty† (non transferable) and a 5 year Perforation Corrosion Warranty on Mitsubishi Express. Always consult your authorised Mitsubishi Dealer for the latest details on specifications, options, prices, availability and conditions on New Vehicle Warranty. All product illustrations and specifications referred to herein are correct at the time of publication approval. Subject to any applicable Federal, State or Territory Laws or ordinances, which may apply from time to time, Mitsubishi Motors Australia Ltd. reserves the right, without notice, or obligation, to discontinue or make changes to designs, specifications, colours and materials of the options and products referred to herein at any time without incurring any liability to any purchaser thereof. ©Mitsubishi Motors Australia Limited. ABN 53 007 870 395. EXPRESSO503F

	SWB 5 speed	Window Van 5 speed	MWB 5 speed	Walk Thru 5 speed	Walk Thru 4 speed
DIMENSIONS (mm)	manual	manual	manual	manual	auto
Overall height	1840	1840	1955	1960	1960
Overall length	4505	4505	4905	5065	5065
Overall width	1690	1690	1690	1695	1695
Ground clearance	190	190	190	190	190
Track - front	1445	1445	1445	1445	1445
Track - rear	1380	1380	1380	1420	1420
Wheelbase	2235	2235	2435	3000	3000
Cargo area length	2335	2335	2735	2425	2425
Cargo area width	1525	1525	1525	1525	1525
Cargo area width between wheel arches	1070	1070	1070	1040	1040
Cargo area height	1245	1245	1360	1365	1365
Cargo area floor height	610	610	610	605	605
CAPACITIES					
Gross vehicle mass (kg)	2305	2305	2505	2710	2710
Kerb mass (kg)	1280	1300	1370	1500	1560
Payload (kg)^^	1025	1005	1135	1210	1150
Maximum Front Axle Load (kg)	1200	1200	1200	1200	1200
Maximum Rear Axle Load (kg)	1450	1450	1450	1700	1700
Seating capacity	2	5	2	2	2
MAXIMUM TOWING CAPACITY*					
Kg – with trailer brakes	1200	1200	1200	1200	1200
Kg – without trailer brakes	600	600	600	600	600
TURNING CIRCLE					
Metres (kerb to kerb)	9	9	9.8	11.8	11.8
FUEL TANK CAPACITY					
Litres	55	55	55	66	66

GEAR RATIOS	SWB manual	MWB manual	MWB Walk Thru manual	MWB Walk Thru auto
1st	3.967	3.967	3.967	2.826
2nd	2.136	2.136	2.136	1.493
3rd	1.36	1.36	1.36	1
4th	1	1	1	0.73
5th	0.856	0.856	0.856	-
Reverse	3.578	3.578	3.578	2.703
Final Gear Ratio	4.875	4.875	4.636	4.636


^{^^} Payload includes occupants, fuel and fitted options (if any). The weight of these must be deducted from Payload to determine actual load carrying capacity. Front and/or Rear Axle Loads must not be exceeded.





[^] Subject to state regulations and towbar design.

EXPRESS SWB

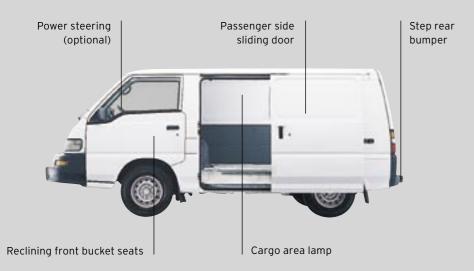

The functional design and size of the SWB means that it can easily carry your loads while the optional power steering available on SWB models make it easy to park in those impossibly tight parking spaces.

Tilt adjustable steering wheel provides

comfort to help prevent driver fatigue.



The remote rear and side door lock provides convenient access and security.

EXPRESS SWB WINDOW



Reliability. Your reputation depends on it and the unstoppable Express range has been built on it. But being reliable, also means staying safe. The Express SWB Window van boasts a range of great safety features which make it both cargo friendly and people friendly.



A cargo protection bar and cargo tie down rings, prevent loose loads from moving around in transit.




Cloth covered seats fully recline and the driver's seat lumber adjuster provides comfort behind the wheel.

EXPRESS MWB



The stylish, aerodynamic body is pleasing to the eye, while the sturdy build of the Express reflects a unique inner strength. Purpose built to take whatever the job demands, Express is a perfect combination of laid back comfort and true blue Aussie work ethic.

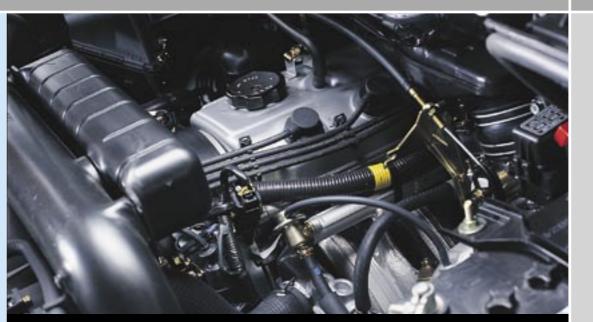

POWER TO GET THE JOB DONE

Express Walk-Thru features a 2.4 litre 4 cylinder SOHC, 16 valve multi-point fuel injected petrol engine producing 97kW of power and 192Nm of torque. The Express SWB & MWB features a reliable 2.0 litre 4 cylinder SOHC, 16 valve petrol engine producing 83kW of power and 165Nm of torque. Both engines are LPG Compatible.

EXPRESS MWB WALK-THRU



*With trailer brakes

Express comes with all the luxury and safety features expected by people who are constantly on the road. Features such as the Anti-lock Braking System (ABS), driver airbag and the anti-theft engine immobiliser are installed in the Express Walk-Thru giving you the confidence that your livelihood will be protected.



EASY ACCESS

All side and rear doors open to roof height to make it easy to accommodate tall and bulky items, while the flat floor lets you make the most of all the available space.