



The state-of-the-art Hino A09 Turbo Diesel engine is renowned globally for driving performance, economy, durability, and reliability. Want proof? The B10 life rating for this engine is 1,000,000 miles!



Yes, we do the little things like extra-wide door openings, large step surfaces and grab handles to keep drivers safe, but in today's world, that's not enough. With the Hino Safety Suite, active safety systems drivers are safer with the help of today's cutting edge camera and radar technologies.



Driver retention is tough. Bluetooth Radio w/CD player, Air ride drivers seat, USB charging port, A/C, cruise control, tilt & telescopic steering wheel, will help. That's why it's STANDARD.



Layers of air between you and the bumpy road. Air suspension drivers seat and the Link Cabmate® Air suspension cab are both STANDARD.



## TELEMATICS, CASE MANAGEMENT, REMOTE DIAGNOSTICS...STANDARD.

At Hino we are leading the industry in supporting your business. From the moment you take delivery of your Hino INSIGHT equipped connected vehicle, you're on the road to more uptime and lower



operating costs. Combining Telematics, Remote Diagnostics and Case Management in one integrated platform, Hino INSIGHT puts critical vehicle and driver management tools at your fingertips.



# TRUCKS

A Toyota Group Company

## POWER ON.

Hino enters into the Class 7/8 market with style. Meet the all-new Hino XL Series. With more power, higher GVWR's, and more options, Hino now supports a broader range of customers. Hino Trucks models have been the fastest growing medium duty trucks for years. It started with great aerodynamics and durability, and continued with standard connected vehicle features like Hino INSIGHT - which provides Telematics, Remote Diagnostics and Case Management for the first time in this vehicle class. Combine this track record with the legendary Hino A09 engine and the Hino XL7 & XL8 models are bound to turn heads.

Available in day, extended and crew cab configurations, the Hino XL Series trucks are ideal for applications ranging from 33,000 lbs. to 66,000 lbs. GVWR. Add industry leading warranty and support from HinoCare and HinoWatch and you can see why Hino Trucks has everyone talking - POWER ON.

HSS\_XLSERIES\_0220



# 2021

## XL | SERIES

HINO



# ULTIMATE OWNERSHIP EXPERIENCE

## OUR COMMITMENT

When you make the decision to go Hino, its about more than just a truck.

# 5 YEAR WARRANTY

## 5 YEAR WARRANTY - STANDARD

Best-in-class 5 year/250,000 miles of extended engine warranty coverage standard. Additional extended engine and aftertreatment warranties out to 300,000 miles are available.



Only Hino provides a 5-year, unlimited mile Allison transmission warranty... **STANDARD.**

# 24/7 ASSISTANCE HINOWATCH

## HINOWATCH - STANDARD

24/7 Roadside Assistance is standard for 3 years on all Hino trucks - unlimited mileage. HINOWATCH includes lockout, out of fuel, battery jumpstart and warranty towing.

# HINOCARE

## HINOCARE - AVAILABLE

Preventive maintenance saves money and increases uptime across your entire fleet. HINOCARE multi-year programs mean you can match your needs with your long term goals for cost management.

# XL SERIES - SPECIFICATIONS

## ENGINE/DRIVETRAIN/AXLE


Engine model	Hino A09 9 liter diesel
Type	Diesel 4 cycle, cylinder in-line, water-cooled, dimple dry cylinder lined
Turbocharger	Variable geometry
Fuel System	Common rail, Denso direct injection
Bore & Stroke	4.4 x 5.9 in.
Max. output @ 1,800 rpm	300-360hp
Max. torque @ 1,400 rpm	900-1,150 lb.-ft.
Emissions system	Cooled EGR with Selective Catalytic Reduction (SCR)
Transmission	Allison Six Speed automatic with FuelSense 2.0
Driveline	Dana Spicer SPL 170
Front & rear axles	Dana Spicer (Rear-multiple axle ratios available)

## ELECTRICAL EQUIPMENT

Batteries	<input type="checkbox"/> STD Two, parallel connection, 1200 CCA (GR 31)	<input type="checkbox"/> OPT Multiple two battery choices	<input type="checkbox"/> OPT Multiple three battery choices
Alternator	<input type="checkbox"/> STD 12V, 130A, Delco (brush)	<input type="checkbox"/> OPT 12V, 135A (brushless)	<input type="checkbox"/> OPT 180A (brush) <input type="checkbox"/> OPT 200A (brush)
Starter	Denso-12V, 4.8kW		

## TANKS

Fuel Tank (gallons)	<input type="checkbox"/> STD single 50	<input type="checkbox"/> OPT single 90	<input type="checkbox"/> OPT single 120
	<input type="checkbox"/> OPT dual 50	<input type="checkbox"/> OPT dual 80	<input type="checkbox"/> OPT dual 120
DEF tank (gallons)	STD 7.4		

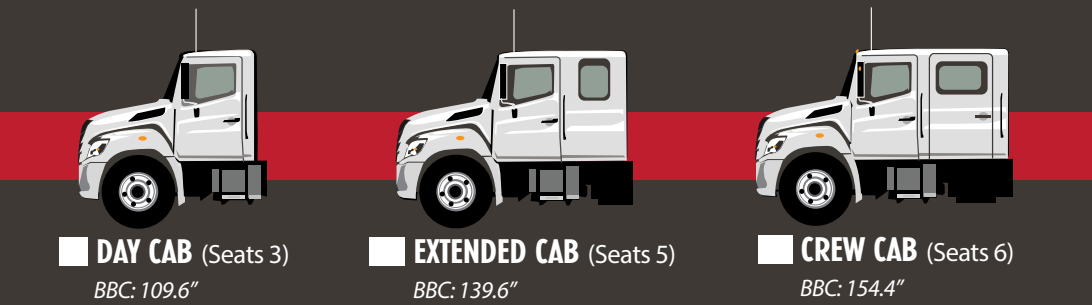

STRAIGHT TRUCK														TRACTOR			
4x2 Wheelbase (in.)	152	175	181	187	196	205	212	217	235	253	271	280	289	298	304	152	162
Cab to axle (in.)																	
Day	84.8	107.8	113.8	119.8	128.8	137.8	144.8	149.8	167.8	185.8	203.8	212.8	221.8	230.8	236.8	84.8	97.8
Extended								119.8	137.8	155.8					206.8		
Crew					84					141							

STRAIGHT TRUCK														TRACTOR		
6x4 Wheelbase (in.)	182	194	214	233	261	265	275	281	182	194						
Cab to axle (in.)																
Day	114.8	126.8	146.8	165.8	193.8	197.8	207.8	213.8	114.8	126.8						
Extended						167.8										
Crew				121												

6x4 axle configuration is only available as an XL8

For additional options and specifications please visit your local Authorized Hino Trucks Dealer. Are you a body company? Additional information @ hinobodybuilder.com

## XL7 GVWR: 33,000 LBS.

**WEIGHT CAPACITIES:** Front axle range:12,000-14,600 lbs. Rear axle range: 21,000-23,000 lbs.

Engine HP	<input type="checkbox"/> STD A09 300hp	<input type="checkbox"/> OPT A09 330hp	<input type="checkbox"/> OPT A09 360hp
Transmission model	<input type="checkbox"/> STD 3000 RDS	<input type="checkbox"/> OPT 3000 HS	<input type="checkbox"/> OPT 3500 RDS
Brakes	<input type="checkbox"/> STD Air S-cam drum	<input type="checkbox"/> OPT Air disc	
Front axle/susp. lbs.	<input type="checkbox"/> STD 12,000	<input type="checkbox"/> OPT 13,200	
Rear susp. type	<input type="checkbox"/> STD Spring multi leaf	<input type="checkbox"/> OPT 21K Hendrickson air susp.	
	<input type="checkbox"/> OPT Shock absorber	<input type="checkbox"/> OPT 23K Hendrickson air susp.	
	<input type="checkbox"/> OPT Sub leaf helper spring		
	<input type="checkbox"/> OPT Rubber helper spring		
Rear axle/susp. lbs.	<input type="checkbox"/> STD 21,000	<input type="checkbox"/> OPT 23,000	
Wheel type (22.5")	<input type="checkbox"/> STD Powder coated white	<input type="checkbox"/> OPT Aluminum Accuride or Alcoa	
Frame yeild strength	<input type="checkbox"/> STD 120K PSI(1.9 M RBM)	<input type="checkbox"/> OPT 120K PSI(2.6 M RBM)	<input type="checkbox"/> OPT Double frame 120K PSI(3.8 M RBM)

## XL8 GVWR: 34,200-66,000 LBS.

**WEIGHT CAPACITIES:** Front axle range:12,000-20,000 lbs. Rear axle range: 21,000-46,000 lbs.

Engine HP	<input type="checkbox"/> STD A09 300hp	<input type="checkbox"/> OPT A09 330hp	<input type="checkbox"/> OPT A09 360hp		
Transmission model	<input type="checkbox"/> STD 3000 RDS	<input type="checkbox"/> OPT 3000 HS	<input type="checkbox"/> OPT 3500 RDS		
Brakes	<input type="checkbox"/> STD Air S-cam drum	<input type="checkbox"/> OPT Air disc			
Front axle/susp. lbs.	<input type="checkbox"/> STD 12,000	<input type="checkbox"/> OPT 14,600	<input type="checkbox"/> OPT 16,000	<input type="checkbox"/> OPT 18,000	<input type="checkbox"/> OPT 20,000
Rear axle/susp. lbs.	Single Axle (4x2)		Tandem Axle (6x4)		
	<input type="checkbox"/> STD 21,000		<input type="checkbox"/> OPT 40,000		
	<input type="checkbox"/> OPT 23,000		<input type="checkbox"/> OPT 46,000		
Rear susp. type	<input type="checkbox"/> STD Spring multi leaf		<input type="checkbox"/> OPT Hendrickson COMFORT AIR		
	<input type="checkbox"/> OPT Shock absorber				
	<input type="checkbox"/> OPT Sub leaf helper spring				
	<input type="checkbox"/> OPT Rubber helper spring				
	<input type="checkbox"/> OPT Hendrickson air susp.		<input type="checkbox"/> OPT Hendrickson HAULMAAX Rubber		
Wheel type (22.5")	<input type="checkbox"/> STD Powder coated white		<input type="checkbox"/> OPT Aluminum Accuride or Alcoa		
Frame yeild strength	<input type="checkbox"/> STD 120K PSI (1.9 M RBM)		<input type="checkbox"/> STD 120K PSI (2.1 M RBM)		
	<input type="checkbox"/> OPT 120K PSI (2.6 M RBM)		<input type="checkbox"/> OPT Double frame 120K PSI(3.8 M RBM)		

# XL SERIES POPULAR OPTIONAL EQUIPMENT

- Allison Fuel Sense Plus / Max
- Anti-siphon device insert in fuel tank
- Differential lock and controls
- Engine idle shutdown 3, 5, 10 minute
- VIN tag derate to 26K (XL7 only)
- Back-up alarm
- Cab paint, exterior - custom (factory)
- Exhaust system - vertical stack type
- Jacobs engine brake
- Mirrors, fender mounted-chrome (both sides or passenger only)
- Mirrors, outside rearview-chrome
- Mirrors-power heated (available in chrome)
- Convex Passenger side look down mirror
- Power windows and door locks (available with keyless entry)
- Programmable speed limit 65,70 mph
- Trailer brake package
- Rear of cab work light
- SAF Holland FW17 or FW35 fifth wheel (stationary)  24" slide



- Battery disconnect & jump start station



- Hino Safety Suite



WABCO OnGuardACTIVE™ Collision Mitigation with Adaptive Cruise Control & Electronic Stability Control

WABCO OnLaneALERT™ Lane Departure Warning System

