



## INTERNATIONAL TRUCKS



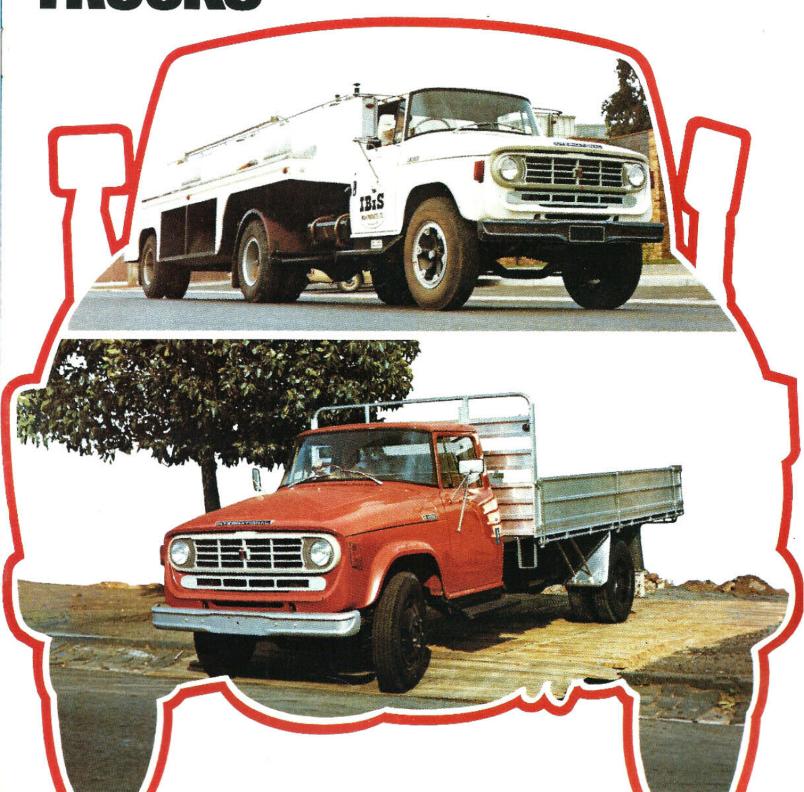

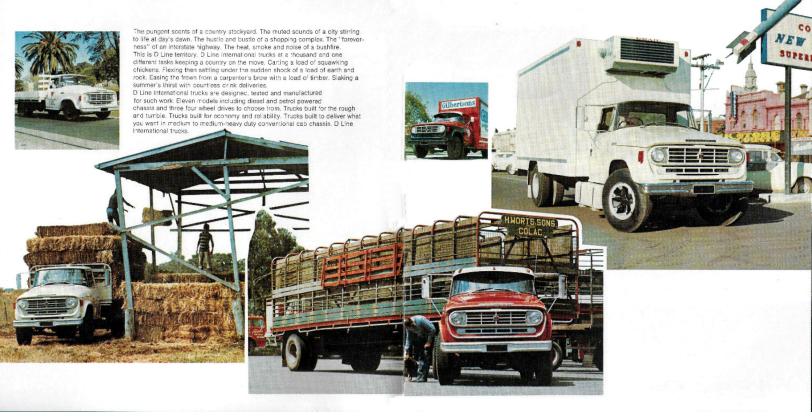


## **BIG & COMFORTABLE:**

# THE D-LINE CAB

This is where you'll spend your working day. You'll find it roomy, comfortable and functional, designed for your ease and convenience. The seat is deep cushioned, full width (you can easily take two passengers) and adjustable. All controls are placed for natural use while individual instruments and warning systems keep you informed of vehicle performance. Glass areas are designed to give you an expansive view while dual sun visors, ashtray and centre mounted map compartment are provided for your convenience. The floormat is heavy duty and complete with a sound absorbing, Quarter less have fire the seat of the s

The all-steel D Line cab. Built for your convenience. Built to last.

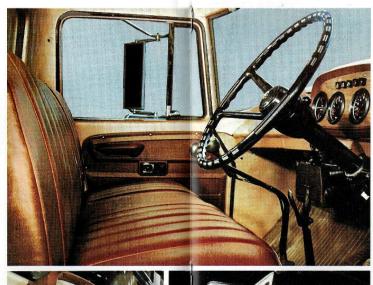



Lap seat belts are supplied as standard equipment for driver and outboard passenger on all D-line cabs except the D1310 4 x 4.



### **MUSCLE**

The truck specification most suited to your needs — that's what D line International Trucks offer you. Eleven basic models rated from A.B. to 20.90 t. (46.00 lb.) Gross Compination Mass That line-to includes perto land diesel models and four wheel drive models. And with in the range, expendent on model, you have a choice of engines, wheelbases, transmiss on send other major options. See the candensed specifications on the back of this catalogue for further details.

#### **ENGINES**

6-281 International patrol six. 106 kW (142 bhp) at 3 800 rpm. 327 Nm (242 bhp) at 3 800 rpm. 327 Nm (250 rpm. 541 flow oil litter, Positive drankcase venillation. Dry element sir cleaner with restriction indicator, Standard petrol. Manufactured in Australia.

N-345 International petrol V-8, 132 kW (177 bhp) at 4 000 rpm, 409 Nm (302 lb. ft) torque at 2 000 rpm. Full flow oil filter. Positive crankcase ventilation. Dry element air cleaner with restriction indicator. Standard petrol. Manufactured in Austra ia.

6.354 Perkins diesel six. 98 kW (131 bhp) at 2 800 rpm, 385 Nm (284 lb. ft.) torque at 1 500 rpm, Full flow oil filter. Dry element air cleaner, with restriction indicator.

#### **DRIVELINE**

Capacity matched clutches, transmissions and rear axies get the power to the ground efficiently. Transmissions are four or the speed cependent on model. All feature easy shifting and well spaced ratios to get the load moving and keep it moving. Two-speed rear axlos are specified in heavier duty models for greater flexibility.

#### **BRAKES**


All D Line brakes are power assisted and matched to vehicle rating for safe, sure stopping. Positive parking brakes complete the package.

#### SUSPENSION

Big capacity load and road absorbing suspension systems protect your truck and load. Front shock absorbers on all models and auxiliary rear springs on neavier models give good ride and handling characteristics under a wide veriety of conditions.

#### FOUR WHEEL DRIVE

Three models for the man whose work lakes him into the rough and tumble. These models are all powered by the International 6-281 six cylinder petrol engine, driving through a four speed maintransmission and two-speed ransfer case. Rear axles are hypoid single reduction with full floating induction hardened axle shefts.

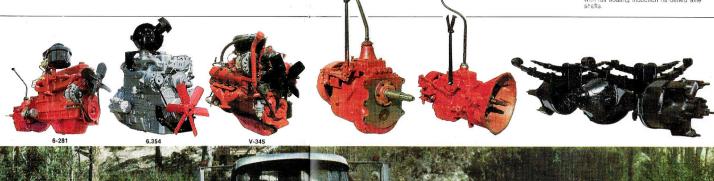











## **CONDENSED SPECIFICATIONS**

MODEL	ENGINE		TRANSMISSION		REAR AXLE	RATINGS tonne (lb.)		WHEELBASES	
	std.	opt.	std.	opt.	tonne (lb.)	GVM	GCM	m	(in.)
D-1310	6-281		4 speed		3.40 (7 500) single speed	4.90 (10 800)	7.55 (16 600)	3.28 3.89	129 153
D-1510	6-281	V-345	4 speed		4.55 (10 000) single speed	6.12 (13 500)	11.35 (25 000)	3.89	153
D-1610	6-281	V-345	4 speed	5 speed	6.35 (14 000) single speed	8.85 (19.500)	14.50 (32 000)	4.34 4.80	171 189
D-1630	6.354		4 speed	5 speed	6.35 (14 000) single speed	8.85 (19.500)	14.50 (32 000)	4.34 4.80	171 189
D-1710	V-345		4 speed	†5 speed	7.95 (17.500) two speed	10,05 (22,150)	17.50 (38.500) †19.300 (42.500)	4.34 4.80	171 189
D-1730	6,354		4 speed	†5 speed	7.95 (17 500) two speed	10.05 (22 150)	17.50 (38 500)	4.34 4.80	171 189
D-1810	V-345		5 speed		8.40 (18 500) two speed	11.60 (25 600)	20.90 (46 000)	3.89 4.34 4.80	153 171 189
D-1830	6.354		5 speed		8.40 (18 500) two speed	11.60 (25 600)	20.90 (46.000)	3.89 4.34 4.80	153 - 171 189
D-1310	6-281		4 x 2 speed		3.40 (7.500) single speed	4.28 (9.450)	6.60 (14 550)	3.28	129
D-1410	6-281		4 x 2 speed		3.86 (8.500) single speed	5.66 (12 480)	9.10 (20 000)	3.89	153
D-1610	6-281	V-345	4 x 2 speed		6.35 (14 000) single speed	9,07 (20 000)	13.60 (30 000)	3.89 4.34	153 171

†5 speed with 19.30 tonne (42 500 lb.) GCM rating.

In order that product improvements may be introduced at any time, specifications are subject to change without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment. Colours of trucks are not necessarily standard. Metric and imperial quantities shown are equivalent within the implied accuracy.



