

SPECIFICATIONS

12 PASSENGER AEROBUS

Wheelbase	189"
Overall Length	269.75"
Overall Width	76"
Overall Height	64.37"
Curb Weight	4905 lbs.
Cargo Volume	40 cu. ft.
Front Headroom	35.75"
Bottom of Doors to Ground (Loaded)	12.05"
Ramp Breakover Angle	10.5°
Angle of Approach	18°
Angle of Departure	17°
Minimum Road Clearance at Rear Axle	7.8"
Overhang, Front	34"
Overhang, Rear	46.75"
Rear Seats, Hiproom	64"
Windshield Width	58"
Back Window Width	45.25"
Turning Diameter (curb to curb)	56' 6"

AEROBUS ENGINE SPECIFICATIONS

Type: V-8
 Horsepower: 190 @ 4000 RPM
 Torque: 280 ft. lbs. @ 2400 RPM
 Piston Displacement: 318 cu. inches
 Compression Ratio: 8.25 : 1
 Piston Firing Order: 1-8-4-3-6-5-7-2
 Fuel: Regular

standard equipment for CHECKER AEROBUS

Checker products are built to last longer... to take more punishment... to perform where others fail. Costly construction features, more heavy duty parts and greater attention to detail are "Standard Equipment" with every Checker Aerobus.

- Heavy Duty 3-Speed Standard Transmission
- 190 h.p. V-8 Engine
- 23-gal. Capacity Fuel Tank
- Power Brakes
- Power Steering with Re-circulating Ball Steering Gear
- Heavy Duty Lo Cut-In Alternator
- 80-Amp. Battery
- Heater & Defroster
- 2 Floor Mounted Auxiliary Heaters
- Back-Up Lights
- Parking Brake Warning Light
- Windshield Washer
- Electric Windshield Wipers
- 2 Outside Mirrors
- Undercoating
- Heavy Duty Clutch with Thermoid Facings
- Heavy Duty 15x6L Wheels with 5½" Bolt Circle
- 7:60x15 6-ply and 8:20x15 6-ply Tires
- Parking Brake on Transmission Output Shaft
- Front and Rear Service Brakes are 12" x 2.5"
- Brake Master Cylinder 1.125" Bore
- Heavy Duty Prop Shaft
- All Universal Joints Equipped with Lube Fittings
- Heavy Duty Rear Axle
- Heavy Duty Full Frame with Reinforcing Girders and Beams
- Front Stabilizer Bar
- Heavy Duty Shock Absorbers
- Heavy Duty Front Suspension
- 6-Door Units have Heavy Duty 2½" Wide 6-leaf Rear Springs
- 8-door Units have Heavy Duty 2½" Wide 9-leaf Rear Springs
- Heavy Duty Forged Steering Spindle
- Painted Solid Color of Operator's Choice

OPTIONAL EQUIPMENT


Window Grill Guard • Powr-Lok Axle • Seat Belts
 • Plexiglass Baggage Partition • 2 Tone Paint • Air Conditioning • Tinted Glass • Roof Luggage Carrier

Specifications subject to change without notice.

SPECIFICATIONS

9 PASSENGER AEROBUS

Wheelbase	154.5"
Overall Length	235.25"
Overall Width	76"
Overall Height	64.37"
Curb Weight	4330 lbs.
Cargo Volume	40 cu. ft.
Front Headroom	35.75"
Bottom of Doors to Ground (Loaded)	12.05"
Ramp Breakover Angle	12.5°
Angle of Approach	18°
Angle of Departure	17°
Minimum Road Clearance at Rear Axle	7.8"
Overhang, Front	34"
Overhang, Rear	46.75"
Rear Seats, Hiproom	64"
Windshield Width	58"
Back Window Width	45.25"
Turning Diameter (curb to curb)	47' 3"

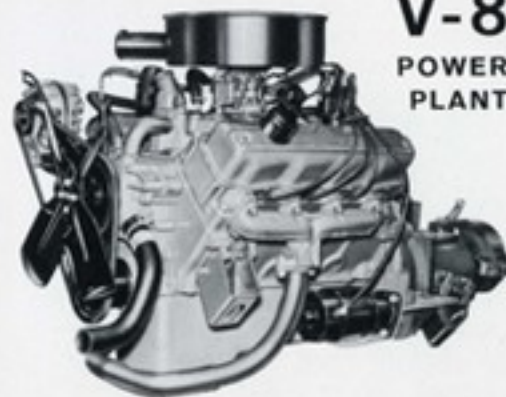

V-8
POWER
PLANT