



2012 SUPER DUTY® CHASSIS CAB



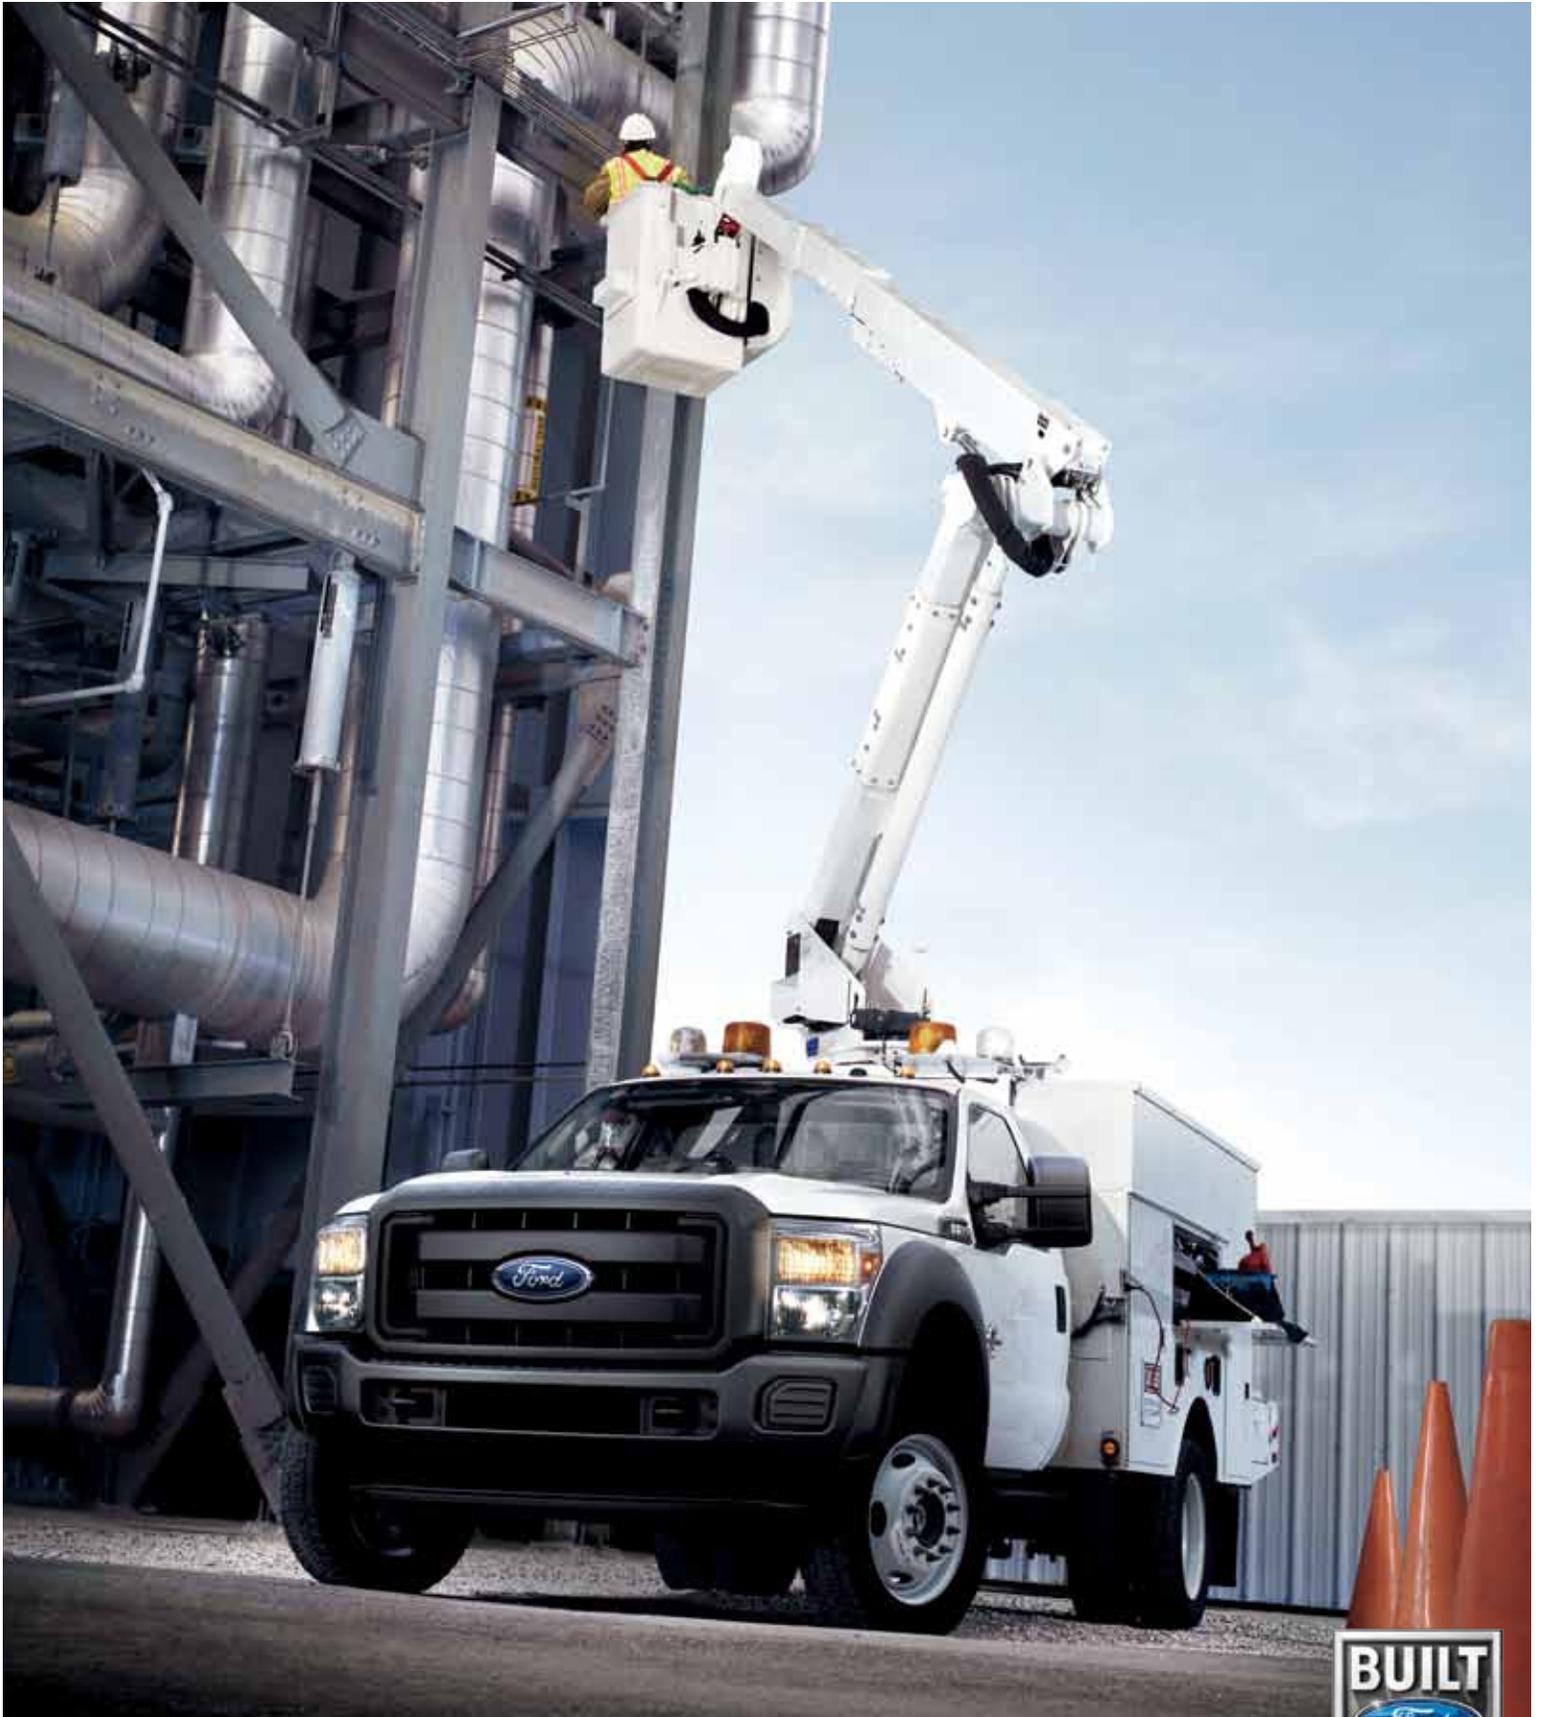

# TOUGH ENOUGH TO NEVER SAY NEVER.

F-Series Super Duty® Chassis Cab never stops working. Purpose-built Ford powertrains make sure of it, delivering robust torque and fuel efficiency. Standard traction control systems boost towing confidence. And a class-exclusive¹ Live-Drive Power TakeOff (PTO) gives Chassis Cab capability normally reserved for trucks twice its size. That's the strength of Canada's Most Versatile Chassis Cab. A strength derived from enduring more torture testing than any Ford Super Duty before it. Tough never rests.

F-550 XL Regular Cab 4x4. Oxford White. Available and aftermarket equipment.


¹Class is Traditional Chassis Cab trucks under 19,500 lbs. (8,845 kg) GVWR.



2012 SUPER DUTY® CHASSIS CAB [ford.ca](http://ford.ca)

# MAKES THE MOST OF EVERY DIESEL DROP.

Designed, engineered and built by Ford, the 6.7L Power Stroke® V8 Turbo Diesel helps this Super Duty® deliver up to a 24% improvement in fuel efficiency over the previous generation, while also giving you more torque. We're talking a massive 660 lb.-ft. of torque, along with 300 horsepower. And this B20-capable engine has already proven itself over kilometres of cumulative testing. More than 16 million kilometres, to be exact. It's the most tested Power Stroke diesel engine ever.

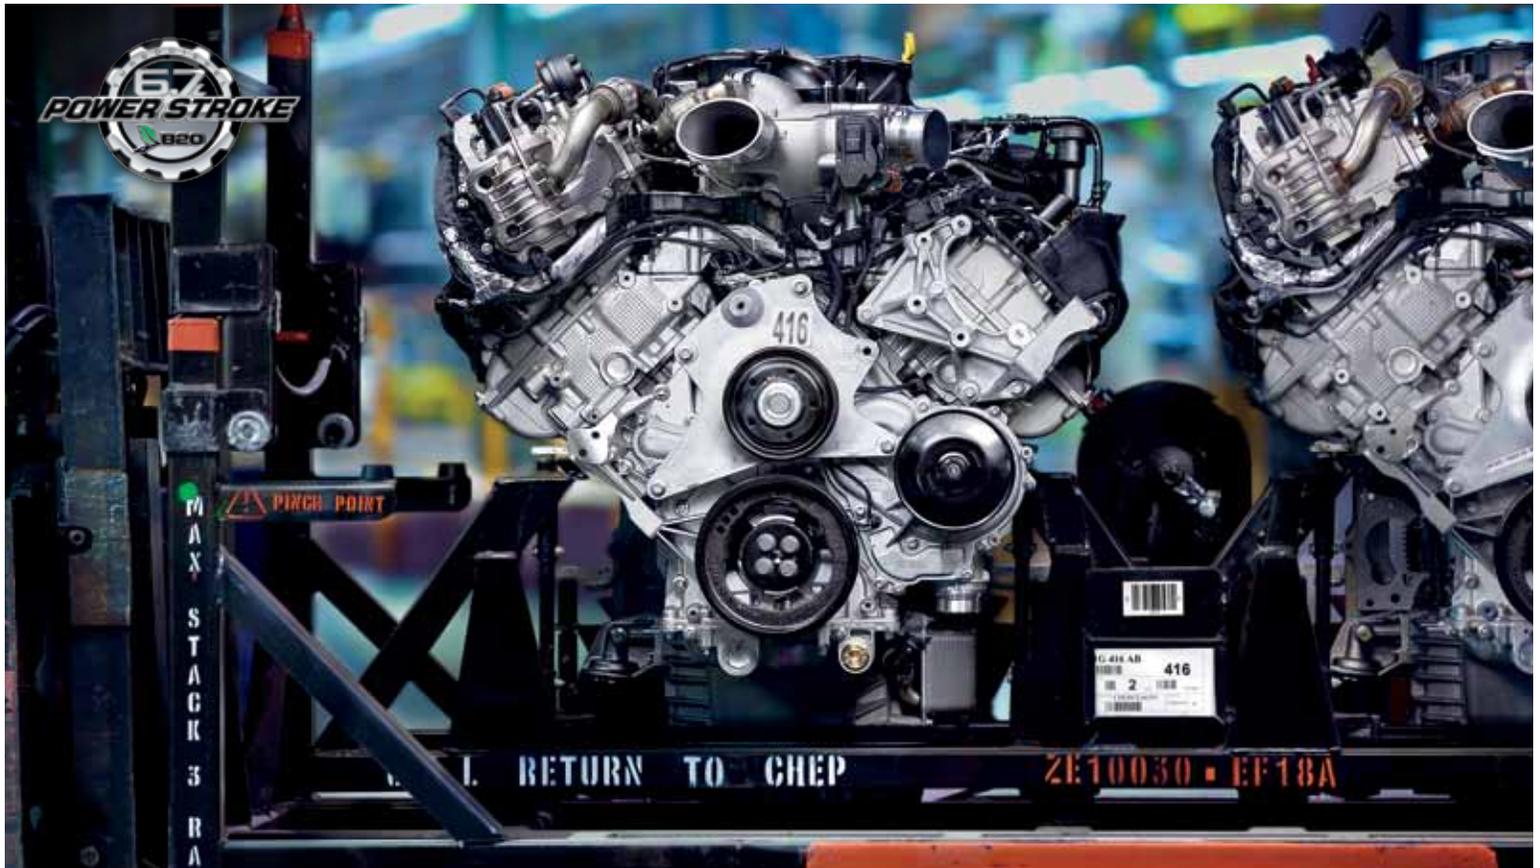


**Delivers maximum power quickly.** The diesel engine's single-stage variable-geometry turbocharger uses a compact, efficient design to help deliver maximum power quickly.

**Harnesses all that power.** Blending the control of a manual with the convenience of an automatic, the Ford TorqShift® 6-speed SelectShift Automatic® transmission allows you to use its full manual mode to lock the torque converter and hold your chosen gear. Or, utilize the progressive range select mode to lock out upper gears when the truck is heavily loaded or when towing on grades.


**Helps maintain the peace.** With its notably quiet, refined sound, our diesel helps reduce NVH (noise, vibration, harshness) – the result of meticulous attention paid to the combustion system, engine block and turbocharger designs.

**Endures torturous testing.** Reliability testing simulated 10+ years of customer abuse. Computer-based methods helped design for durability. And loads that exceeded maximum capacity and over 16 million kilometres of cumulative testing proved component strengths.

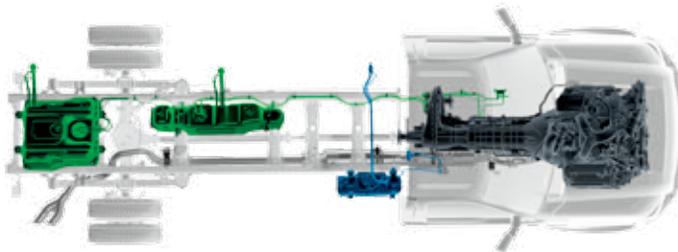

**Cleanest Super Duty diesel ever.** This engine utilizes industry-proven technology and innovative Ford strategies to meet the latest federal emissions standards – reducing nitrogen oxide (NOx) levels by more than 80% compared to the previous generation diesel. For your part, just watch for a low diesel exhaust fluid (DEF) alert in the vehicle's message centre, then locate the blue DEF fill cap next to the green diesel fuel cap, and replenish the DEF supply. The reservoir holds 23 litres of Ford-approved DEF, which can be purchased from your Ford of Canada Dealer or other authorized retailers.


## 6.7L V8 Diesel Performance

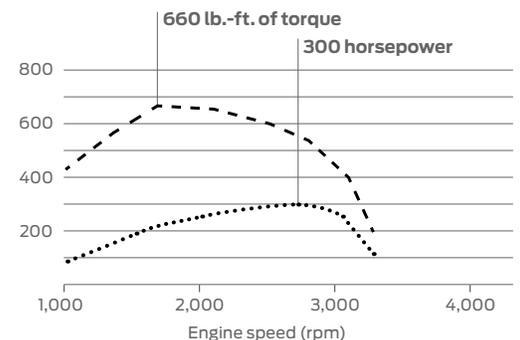



# 26,600 LBS. OF POWERFUL POTENTIAL.

To help you handle the maximum towing capacity of 26,600 lbs. (12,066 kg)! Super Duty® Chassis Cab supplies plenty of help: Telescoping trailer tow mirrors are standard. Class-exclusive PowerScope™ trailer tow mirrors<sup>2</sup> adjust, fold and telescope at the flip of a switch. A tow/haul mode on the diesel powertrain manages gear selection to help keep the engine in its power band for optimal towing performance. And our trailer brake controller<sup>2</sup> uses braking input, vehicle speed and ABS logic to balance the performance of the truck and electric trailer brakes.<sup>3</sup> That's ultimate towing confidence.

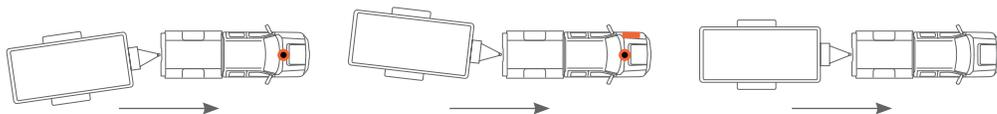

**Helps you keep it in line.** Our trailer sway control<sup>4</sup> standard on SRW models, uses a yaw motion sensor to monitor the motions of your truck and detect trailer sway. When sway is detected, the system can automatically react by selectively braking, helping you maintain control of both the truck and trailer. On DRW models, the standard driver-selectable engine-only traction control function can automatically step in to reduce power when it detects a loss of traction.

F-550 XLT SuperCab 4x4. Oxford White. Available and aftermarket equipment.

<sup>1</sup>When properly equipped. <sup>2</sup>Available feature. <sup>3</sup>Trailer brake controller verified to be compatible with electrically actuated drum brakes and certain electric-over-hydraulic brake systems. See your Ford of Canada Dealer for details. <sup>4</sup>Remember that even advanced technology cannot overcome the laws of physics. It's always possible to lose control of a vehicle due to inappropriate driver input for the conditions.



2012 SUPER DUTY® CHASSIS CAB [ford.ca](http://ford.ca)

# SPORTS BEST V8 GAS HP AND TORQUE IN ITS CLASS!<sup>1</sup>



As the standard engine on F-350, the Ford built 6.2L V8 engine helps Super Duty<sup>®</sup> achieve better fuel efficiency than with the previous generation's standard 5.4L engine. It also generates best-in-class<sup>1</sup> 385 hp and 405 lb.-ft. of torque.<sup>2</sup> Rest assured that this free-breathing, E85-capable engine is ready for work. The Ford powertrain team designed, engineered, built and torture-tested it themselves. These are just some of the strengths of the 6.2L V8 powerplant:

**Produces significant low-rpm torque.** The stiff SOHC valvetrain with roller-rocker shafts also enables an intake- and exhaust-port layout that optimizes airflow.

**Pairs perfectly with TorqShift<sup>®</sup> transmission.** The heavy-duty Ford TorqShift 6-speed SelectShift Automatic<sup>®</sup> is filled with innovations, including an enhanced tow/haul mode that provides better control while hauling heavy loads or towing trailers, especially when descending steep grades.


**Provides extreme durability.** The engine block features reliable cast-iron construction with 4-bolt main bearing caps, including 2 additional cross bolts.

**Stays cool under pressure.** The undersides of the cast-aluminum pistons are directly sprayed with oil from the piston-cooling jets to keep them cool under extreme operating conditions.


**Handles alternative-fuel upfits.** The Gaseous Bi-Fuel Engine Prep Package<sup>3</sup> includes hardened valves and valve seats to ready your Super Duty for biodiesel, compressed natural gas (CNG) or liquefied petroleum gas (LPG) upfits.

For even more pull on F-450/F-550, the 6.8L V10 gas engine supplies 457 lb.-ft. of torque.

## 6.2L V8 Gas Performance

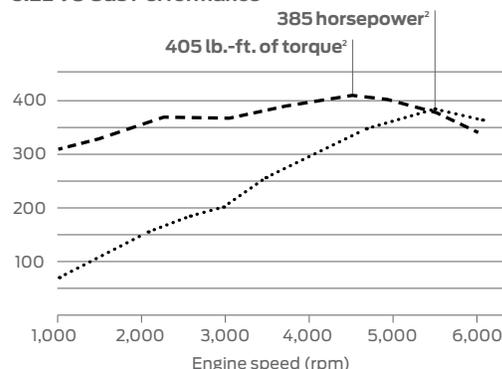

## 6.8L V10 Gas Performance

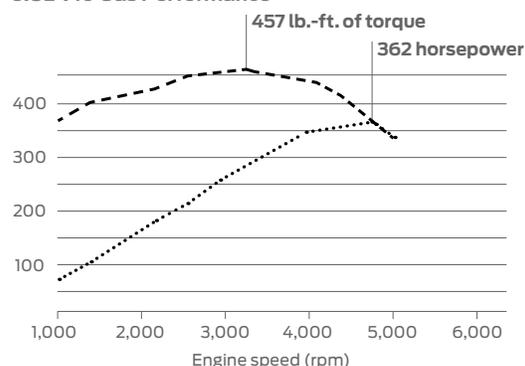

F-350 with 6.2L V8 engine. Vermillion Red.

<sup>1</sup>Class is Traditional Chassis Cab trucks under 19,500 lbs. (8,845 kg) GVWR. <sup>2</sup>385 hp and 405 lb.-ft. of torque for vehicles rated under 10,000 lbs. (4,536 kg) GVWR. 316 hp and 397 lb.-ft. of torque for vehicles rated over 10,000 lbs. (4,536 kg) GVWR. <sup>3</sup>Available feature.



2012 SUPER DUTY<sup>®</sup> CHASSIS CAB [ford.ca](http://ford.ca)

**A. Fuel Tank Options** include a 106-litre midship tank<sup>1</sup> or a dual setup<sup>1</sup> (on DRWs equipped with a diesel engine) that gives you 2 tanks to provide 257 litres of total fuel capacity.

**B. Standard 4-Wheel Anti-Lock Brake System (ABS)** uses vented rotors for good heat distribution and dual-piston calipers for consistent stops, even with the heaviest loads.

**C. Open C-Channel Construction** includes industry-standard 864 mm (34") frame-rail spacing and straight frame rails behind the cab to accept a broad range of aftermarket bodies.

**D. Low-Cab Design** optimizes the Super Duty Chassis Cab for a wide array of over-cab upfits.

**E. Dual Alternators<sup>1</sup> With 357-Amp Rating** on the 6.7L Power Stroke<sup>®</sup> V8 Turbo Diesel provide additional amperage for those accessories and upfits that need it.

**F. Intelligent Oil-Life Monitor™** on the diesel engine tracks oil temperature, filter regeneration cycles, engine-idle hours and kilometres, then alerts you when it's time to change the oil. For optimum performance and engine life, the diesel engine oil filter, fuel filter and coolant should be changed at regularly scheduled intervals.



## DERIVES ITS STRENGTH FROM A FIRM FOUNDATION.

The 2012 Super Duty<sup>®</sup> Chassis Cab is Built Ford Tough,<sup>®</sup> with the versatility to support a wide range of applications. And it's backed by over 60 years of hardworking on-the-job experience. Choose from Regular Cab, SuperCab or Crew Cab. Enjoy flexible seating configurations. Benefit from factory-installed upfitter switches and manually telescoping trailer tow mirrors – just a couple of its valuable standards. Whatever your work involves, rest assured that Ford offers a Chassis Cab that can handle the job. It's toughness you can trust – day in and day out.

**A class-exclusive Live-Drive Power TakeOff (PTO)** provision on the diesel powertrain gives Super Duty Chassis Cab capability normally reserved for trucks twice its size, providing the power *and* agility that fire departments, road crews and others need from their truck. And since the PTO output gear is directly linked to the crankshaft, power is available any time the engine is running (whether moving or not).



F-450 XLT Regular Cab. Dark Blue Pearl. Available equipment.

<sup>1</sup>Available feature.



2012 SUPER DUTY<sup>®</sup> CHASSIS CAB [ford.ca](http://ford.ca)

# SUPER DUTY® CHASSIS CAB Standard Features

## F-350

### Maximum Capabilities<sup>1</sup>

5th-Wheel Towing: 7,530 kg (16,600 lbs.)
Conventional Towing: 6,804 kg (15,000 lbs.)
Payload: 3,407 kg (7,512 lbs.)
GCWR: 11,113 kg (24,500 lbs.)
GVWR: 6,033 kg (13,300 lbs.)
Front GAWR: 2,381 kg (5,250 lbs.) (4x2); 2,722 kg (6,000 lbs.) (4x4)

### Equipment Configurations

Engines: 6.2L gas V8 flex-fuel E85-capable 6.7L Power Stroke® V8 Turbo Diesel B20-capable
Drivelines: 4x2 or 4x4 ■ Single Rear Wheel or Dual Rear Wheel
Bodies: Regular Cab, SuperCab, Crew Cab
Trim Series: XL, XLT, LARIAT

## F-450

### Maximum Capabilities<sup>1</sup>

5th-Wheel Towing: 9,798 kg (21,600 lbs.)
Conventional Towing: 7,258 kg (16,000 lbs.)
Payload: 4,526 kg (9,977 lbs.)
GCWR: 13,608 kg (30,000 lbs.)
GVWR: 7,484 kg (16,500 lbs.)
Front GAWR: 3,175 kg (7,000 lbs.)

### Equipment Configurations

Engines: 6.8L gas V10 6.7L Power Stroke V8 Turbo Diesel B20-capable
Drivelines: 4x2 or 4x4 ■ Dual Rear Wheel Only
Bodies: Regular Cab, SuperCab, Crew Cab
Trim Series: XL, XLT, LARIAT

## F-550

### Maximum Capabilities<sup>1</sup>

5th-Wheel Towing: 12,066 kg (26,600 lbs.)
Conventional Towing: 7,258 kg (16,000 lbs.)
Payload: 5,757 kg (12,692 lbs.)
GCWR: 15,876 kg (35,000 lbs.)
GVWR: 8,845 kg (19,500 lbs.)
Front GAWR: 3,175 kg (7,000 lbs.)

### Equipment Configurations

Engines: 6.8L gas V10 6.7L Power Stroke V8 Turbo Diesel B20-capable
Drivelines: 4x2 or 4x4 ■ Dual Rear Wheel Only
Bodies: Regular Cab, SuperCab, Crew Cab
Trim Series: XL, XLT, LARIAT

### Mechanical

Auxiliary rear springs
Battery saver
Engine block heater
Engine-only traction control (EOTC) (DRW only)
Fail-Safe Engine Cooling System (gas engines)
Fuel tank – 151-litre aft-of-axle
Power steering
Power TakeOff (PTO) provision (6.8L gas and 6.7L diesel engines only; includes transmission-mounted live-drive and stationary models with diesel engine only)
Rear axle – Electronic-locking (SRW)
Rear axle – Limited-slip (DRW)
Stabilizer bars – Front and rear
Stainless steel exhaust system (major components)
Stationary elevated idle control (SEIC) <sup>2</sup>
Steering damper
Trailer sway control (SRW only)
Trailer tow prep includes 7-wire harness (blunt cut) with relays

### Interior

Air conditioning
Assist and ride handles
Coat hooks – 1 (Regular Cab); 2 in rear of cab (SuperCab and Crew Cab)
Dome light (front and rear with Crew Cab)
Overhead console with garage door opener storage and sunglasses storage (SuperCab and Crew Cab)
Powerpoints – 12-volt, 2 on instrument panel
Tilt/telescoping steering column
Upfitter switches – 4 on instrument panel
Windows – Flip-open rear quarter (SuperCab)

## OPTIONAL PACKAGES

**6,804-kg (15,000-lb.) GVWR Package** (F-450 only)

**7,258-kg (16,000-lb.) GVWR Package** (F-450 only)

**7,938-kg (17,500-lb.) GVWR Package** includes 4.88 limited-slip axle (F-550 only)

**Ambulance Prep Package** includes dual alternators (combined 357 amps), standard-width axle with F-350 SRW, and wide-track limited-slip axle with F-350 DRW (restrictions apply)

**Extra-Heavy-Service Front Suspension Package** includes 2-up front springs upgrade (unless maximum springs have been computer selected as included equipment; restrictions apply)

**Gaseous Bi-Fuel Engine Prep Package** includes hardened engine intake valves and valve seats and bi-fuel manifold (F-350 with 6.2L gas engine only)

**Gaseous Bi-Fuel Engine Prep Package** includes hardened engine intake valves and valve seats (F-450/F-550 with 6.8L gas engine only)

**Heavy-Service Front Suspension Package** includes 1-up front springs upgrade (unless maximum springs have been computer selected as included equipment; restrictions apply)

### Exterior

Bumper – Front step
Daytime running lamps
Front tow hooks (2)
Headlamps – Dual-beam jewel-effect
Intelligent 3-blink turn signal
Roof clearance lamps
Solar-tinted glass
Underhood service lamp
Windshield wipers – Intermittent

### Safety & Security

AdvanceTrac® with RSC® (Roll Stability Control™) (SRW only)
Airbags <sup>3</sup> – Driver and right-front-passenger front
Airbags <sup>3</sup> – Front-seat side
Airbags <sup>3</sup> – Safety Canopy® System with side-curtain airbags for all rows and rollover sensor
Belt-Minder™ front safety belt reminder (driver only)
Brake/shift interlock
Brakes – 4-wheel power disc with Anti-Lock Brake System (ABS)
Child-safety-seat top tether anchors (Regular Cab front passenger and all rear-seat positions)
Fuel pump inertia shutoff switch
Headlamps-on, key-in-ignition and door ajar alert chimes
Height-adjustable safety belts at front-outboard positions
Passenger airbag deactivation switch (Regular Cab, SuperCab)
Safety belt pretensioners at front-outboard positions
SecuriLock® Passive Anti-Theft Engine Immobilizer System
Side-intrusion door beams
SOS Post-Crash Alert System™

**High-Capacity Trailer Tow Package** (F-450/F-550 only) includes 13,608-kg (30,000-lb.) GCWR for F-450 and 15,876-kg (35,000-lb.) GCWR for F-550 and upgraded rear-axle gear set (trailer brake controller not included; requires diesel engine)

**Low Deflection Package** (F-450/F-550 only) includes 51-mm (2") spacer blocks; recommended for rear-biased loading (not available on 141" WB)

**Payload Upgrade Package** (F-550 with 141" WB, 6.8L gas engine and 4.88 LS axle only) increases GVWR to 8,618 kg (19,000 lbs.) and includes upgraded frame and rear axle

**Payload Plus Upgrade Package** (F-550 with 4.88 LS axle only) increases GVWR to 8,845 kg (19,500 lbs.) and includes upgraded frame, rear axle and springs (restrictions apply)

**Snow Plow Prep Package** includes computer-selected springs for snow plow application and extra-heavy-duty alternator with diesel engine only (restrictions apply)

**Trailer Tow Package** includes aftermarket trailer brake wiring kit (trailer brake controller not included; restrictions apply)

<sup>1</sup>When properly equipped. <sup>2</sup>Final-stage manufacturer must supply control switches. <sup>3</sup>Always wear your safety belt and follow airbag warning label instructions. Passenger airbag may be deleted.



# SUPER DUTY® CHASSIS CAB Standard Features



## XL

Includes all standard features, plus:

### Mechanical

6.2L SOHC 2-valve gas V8 flex-fuel E85-capable engine (F-350)

6.8L SOHC 3-valve gas V10 engine (F-450/F-550)

TorqShift® heavy-duty 6-speed SelectShift Automatic® transmission (F-350)

TorqShift 5-speed automatic transmission (F-450/F-550)

Manual 4-Wheel-Drive System with manual locking hubs (4x4 models only)

17" argent-painted steel wheels (F-350 DRW)

18" argent-painted steel wheels (F-350 SRW)

19.5" argent-painted steel wheels (F-450/F-550)

LT245/75R17 all-season BSW tires (F-350 DRW)

LT275/65R18E all-season BSW tires (F-350 SRW 4x2)

LT275/70R18E all-terrain BSW tires (F-350 SRW 4x4)

225/70R19.5G all-season BSW tires (F-450/F-550)

### Seating

HD vinyl 40/20/40 split front seat with armrest, cupholders and storage

60/40 split flip-up rear bench seat (SuperCab only)

60/40 split flip-up/fold-down rear bench seat with outboard and centre head restraints (Crew Cab only)

### Interior

AM/FM stereo with digital clock and 2 speakers

Climate controls – Manual

Door locks – Manual

Flooring – Black vinyl floor covering

Message centre – Multifunction plus trip computer includes 3-button steering wheel-mounted switch, odometer, trip odometer, engine-hour meter, distance to empty, average fuel efficiency, oil-life monitor, warning messages, system check, language selection and Ice Blue™ Lighting

Mirror – Manual day/night rearview

Steering wheel – Black urethane with 3-button message centre control

Visors with passenger mirror

Windows – Manual

### Exterior

Bumper – Black-painted front with grained top cover

Door handles – Black

Grille – Black bar-style

Mirrors – Manually telescoping trailer tow with 2-way fold and manual glass

## XLT

Includes select XL features, plus:

### Mechanical

18" cast-aluminum wheels (F-350 SRW)

### Seating

40/20/40 split front seat with centre under-seat lockable storage with 12-volt powerpoint and centre armrest with cupholders and storage

60/40 split flip-up/fold-down rear bench seat with bag hooks, dual integrated cupholders and tray, outboard head restraints, centre head restraint and under-seat partitioned lockable storage with 12-volt powerpoint (Crew Cab only)

Manual lumbar support for driver's seat

### Interior

AM/FM stereo/single-CD player with MP3 capability, digital clock, 4 speakers and auxiliary audio input jack

Accessory delay for power features

Cruise control

Door locks – Power

Flooring – Colour-coordinated carpet

Flooring – Colour-coordinated carpeted floor mats

MyKey™

Visors with covered driver and passenger mirrors

Windows – Power with one-touch-down driver's side window feature

### Exterior

Bumper – Chrome front with grained top cover

Grille – Chrome bar-style

Mirrors – Manually telescoping trailer tow with 2-way fold, power/heated glass, heated manual spotter mirrors, and integrated clearance lamps and turn signals

Perimeter anti-theft alarm

Privacy glass (rear doors and rear window)

Remote Keyless Entry System with 2 integrated key transmitter remotes

## LARIAT

Includes select XLT features, plus:

### Mechanical

6.7L Power Stroke® V8 Turbo Diesel B20-capable engine (F-450/F-550)

TorqShift heavy-duty 6-speed SelectShift Automatic transmission (F-450/F-550)

Trailer Tow Prep Package

17" polished forged-aluminum wheels (F-350 DRW)

18" 6-spoke cast-aluminum wheels (F-350 SRW)

19.5" polished forged-aluminum wheels (F-450/F-550)

### Seating

10-way power driver and front-passenger seats

4-way adjustable driver and right-front-passenger head restraints

Heated and cooled driver and right-front-passenger seats

### Interior

Premium Sound System AM/FM stereo/single-CD player with MP3 capability, digital clock and 8 speakers with subwoofer

Ford SYNC® voice-activated, in-vehicle connectivity system

Sirius® Satellite Radio with 6-month prepaid subscription

Dual-zone electronic automatic temperature control

Memory group includes memory feature on power trailer tow mirrors, 10-way power driver's seat, and power-adjustable pedals

Message centre – Driver-configurable enhanced information centre with 4.2" LCD productivity screen includes gauge setup, trip computer, fuel efficiency and towing/off-road applications, SelectShift controls, halo lighting, daytime illumination, and 5-button steering wheel-mounted switch

Mirror – Auto-dimming rearview with compass

Power-adjustable pedals

Steering wheel – Colour-coordinated leather-wrapped with 5-button message centre control and secondary audio controls

Universal garage door opener

Visors with illuminated driver and passenger mirrors

Woodgrain-style instrument panel accents

### Exterior

Autolamp with rainlamp feature

Cab steps – 6" angular black moulded

Door handles – Body-colour

Fog lamps

Mirrors – PowerScope™ power-telescoping/-folding trailer tow mirrors with power/heated glass, heated manual spotter mirrors, and integrated clearance lamps and turn signals

Rear window – Power-sliding with privacy glass and defrost SecuriCode™ keyless entry keypad



# SUPER DUTY® CHASSIS CAB Optional Features



## XL

### Mechanical

6.7L Power Stroke® V8 Turbo Diesel B20-capable engine
Alternators – Dual with 357-amp total (diesel engine only)
Electronic shift-on-the-fly (ESOF) 4-Wheel-Drive System with auto/manual locking hubs (4x4 models only; n/a with 6.8L gas engine)
Fuel tank – 106-litre midship (n/a w/189" WB Regular Cab or 200" WB Crew Cab with gas engines)
Fuel tank – Dual tanks (151-litre aft-of-axle and 106-litre midship; DRW diesel engine only)
Hydraulic jack (2-ton for F-350 SRW; 4-ton for F-350 DRW; 6-ton for F-450/F-550)
Integrated trailer brake controller
Operator commanded exhaust filter regeneration (6.7L diesel engine only)
Rear axle – Higher-ratio (F-350 only)
Spare tire/wheel/jack
17" argent-painted steel wheels – 4 (F-350 SRW)
17" polished forged-aluminum wheels – 4 (F-350 DRW)
LT245/75R17 all-terrain BSW tires – 6 (F-350)
225/70R19.5G BSW traction tires – 2 all-season tires and 4 traction tires (F-450/F-550)
225/70R19.5G max traction BSW tires – 6 (F-450/F-550 4x4 only)

### Seating

40/mini-console/40 front bucket seats (HD vinyl or cloth)
---

### Interior

AM/FM stereo/single-CD player with MP3 capability, digital clock, 4 speakers, auxiliary audio input jack and MyKey™
Ford SYNC® voice-activated, in-vehicle connectivity system (requires single-CD audio system)
Radio delete
Air conditioning delete
Cruise control
Rapid-heat supplemental cab heater (requires diesel engine and alternator upgrade)

### Exterior

Cab steps – 6" angular black moulded
Exterior backup alarm
Mirrors – Manually telescoping trailer tow with 2-way fold, power/heated glass, heated manual spotter mirrors, and integrated clearance lamps and turn signals
Power Code™ Remote Start System (requires Power Equipment Group; Fleet only)
Rear window – Manual-sliding with privacy glass
Splash guards/mud flaps (F-350 only)
Transfer case skid plate (4x4 SuperCab and Crew Cab only)

### Ford Work Solutions™

Crew Chief™ powered by Telogis® – Fleet tracking system
---

### Packages

**Convenience Package** includes AM/FM stereo/single-CD player with MP3 capability, digital clock, 4 speakers and cruise control

**Power Equipment Group** includes power door locks and front windows (plus rear on Crew Cab) with one-touch-down driver's window feature; accessory delay; Remote Keyless Entry System with 2 integrated key transmitter remotes; MyKey; and perimeter anti-theft alarm (Fleet only)

**XL Décor Package** includes chrome front bumper with grained top cover, and bright hub covers and centre ornaments (hub covers and centre ornaments included with SRW only)

See previous spread for content of the following packages:

**6,804-kg (15,000-lb.) GVWR Package** (F-450 only)

**7,258-kg (16,000-lb.) GVWR Package** (F-450 only)

**7,938-kg (17,500-lb.) GVWR Package** (F-550 only)

**Ambulance Prep Package**

**Extra-Heavy-Service Front Suspension Package**

**Gaseous Bi-Fuel Engine Prep Package** (F-350 with 6.2L gas engine only)

**Gaseous Bi-Fuel Engine Prep Package** (F-450/F-550 with 6.8L gas engine only)

**Heavy-Service Front Suspension Package**

**High-Capacity Trailer Tow Package** (F-450/F-550 only)

**Low Deflection Package** (F-450/F-550 only)

**Payload Upgrade Package** (F-550 with 141" WB and 6.8L gas engine only)

**Payload Plus Upgrade Package** (F-550 only)

**Snow Plow Prep Package** (restrictions apply)

**Trailer Tow Prep Package**





## XLT

### Mechanical

6.7L Power Stroke® V8 Turbo Diesel B20-capable engine
Alternators – Dual with 357-amp total (diesel engine only)
Electronic shift-on-the-fly (ESOF) 4-Wheel-Drive System with auto/manual locking hubs (4x4 models only; n/a with 6.8L gas engine)
Fuel tank – 106-litre midship (n/a w/189" WB Regular Cab or 200" WB Crew Cab with gas engines)
Fuel tank – Dual tanks (151-litre aft-of-axle and 106-litre midship; DRW diesel engine only)
Hydraulic jack (2-ton for F-350 SRW; 4-ton for F-350 DRW; 6-ton for F-450/F-550)
Integrated trailer brake controller
Operator commanded exhaust filter regeneration (6.7L diesel engine only)
Rear axle – Higher-ratio (F-350 only)
Spare tire/wheel/jack
17" polished forged-aluminum wheels – 4 (F-350 DRW)
19.5" polished forged-aluminum wheels (F-450/F-550)
LT245/75R17 all-terrain BSW tires – 6 (F-350 DRW)
LT245/75R17 all-terrain OWL tires – 4 (F-350 DRW)
LT275/70R18 all-terrain OWL tires – 4 (F-350 SRW 4x4)
225/70R19.5G BSW traction tires – 2 all-season tires and 4 traction tires (F-450/F-550)
225/70R19.5G max traction BSW tires – 6 (F-450/F-550 4x4 only)

### Seating

Cloth 40/console/40 front bucket seats with 6-way power driver's seat and flow-through centre console with lockable storage, two 12-volt powerpoints and a 110-volt power outlet (SuperCab and Crew Cab only)

### Interior

Ford SYNC® voice-activated, in-vehicle connectivity system
Sirius Satellite Radio with 6-month prepaid subscription (SuperCab and Crew Cab only)
Carpet delete
Flooring – All-weather floor mats
Power-adjustable pedals
Rapid-heat supplemental cab heater (requires diesel engine and alternator upgrade)

### Exterior

Cab steps – 6" angular black moulded
Exterior backup alarm
Mirrors – PowerScope™ power-telescoping/-folding trailer tow with power/heated glass, heated manual spotter mirrors, and integrated clearance lamps and turn signals (SuperCab and Crew Cab only)
Rear window – Manual-sliding with privacy glass (Regular Cab only)
Rear window – Power-sliding with privacy glass and defrost (SuperCab and Crew Cab only)
Power Code™ Remote Start System
Splash guards/mud flaps (F-350 only)
Transfer case skid plate (4x4 SuperCab and Crew Cab only)

### Ford Work Solutions™

Crew Chief™ powered by Telogis® – Fleet tracking system

### Packages

**Advanced Security Group** includes autolock/unlock, autolamp with rainlamp feature and SecuriCode™ keyless entry keypad

See previous spread for content of the following packages:

**6,804-kg (15,000-lb.) GVWR Package** (F-450 only)

**7,258-kg (16,000-lb.) GVWR Package** (F-450 only)

**7,938-kg (17,500-lb.) GVWR Package** (F-550 only)

**Ambulance Prep Package**

**Extra-Heavy-Service Front Suspension Package**

**Gaseous Bi-Fuel Engine Prep Package** (F-350 with 6.2L gas engine only)

**Gaseous Bi-Fuel Engine Prep Package** (F-450/F-550 with 6.8L gas engine only)

**Heavy-Service Front Suspension Package**

**High-Capacity Trailer Tow Package** (F-450/F-550 only)

**Low Deflection Package** (F-450/F-550 only)

**Payload Upgrade Package** (F-550 with 141" WB and 6.8L gas engine only)

**Payload Plus Upgrade Package** (F-550 only)

**Snow Plow Prep Package** (restrictions apply)

**Trailer Tow Prep Package**





## LARIAT

### Mechanical

6.7L Power Stroke® V8 Turbo Diesel B20-capable engine (F-350 only)

Alternators – Dual with 357-amp total (diesel engine only)

Electronic shift-on-the-fly (ESOF) 4-Wheel-Drive System with auto/manual locking hubs (4x4 models only; n/a with 6.8L gas engine)

Fuel tank – 106-litre midship (n/a w/189" WB Regular Cab or 200" WB Crew Cab with gas engines)

Hydraulic jack (2-ton for F-350 SRW; 4-ton for F-350 DRW; 6-ton for F-450/F-550)

Integrated trailer brake controller

Rear axle – Higher-ratio (F-350 only)

Spare tire/wheel/jack

LT245/75R17 all-terrain BSW tires – 6 (F-350 DRW)

LT245/75R17 all-terrain OWL tires – 4 (F-350 DRW)

LT275/70R18 all-terrain OWL tires – 4 (F-350 SRW 4x4)

225/70R19.5G BSW traction tires – 2 all-season tires and 4 traction tires (F-450/F-550)

225/70R19.5G max traction BSW tires – 6 (F-450/F-550 4x4 only)

### Seating

Premium leather-trimmed 40/console/40 front bucket seats with flow-through centre console with lockable storage, two 12-volt powerpoints and a 110-volt power outlet

### Interior

Flooring – All-weather floor mats

Rapid-heat supplemental cab heater (requires diesel engine and alternator upgrade)

### Exterior

Exterior backup alarm

Power Code™ Remote Start System

Splash guards/mud flaps (F-350 only)

Transfer case skid plate (4x4 only)

### Ford Work Solutions™

Crew Chief™ powered by Telogis® – Fleet tracking system

### Packages

See previous spread for content of the following packages:

**6,804-kg (15,000-lb.) GVWR Package** (F-450 only)

**7,258-kg (16,000-lb.) GVWR Package** (F-450 only)

**7,938-kg (17,500-lb.) GVWR Package** (F-550 only)

**Ambulance Prep Package**

**Extra-Heavy-Service Front Suspension Package**

**Gaseous Bi-Fuel Engine Prep Package** (F-350 with 6.2L gas engine only)

**Heavy-Service Front Suspension Package**

**High-Capacity Trailer Tow Package** (F-450/F-550 only)

**Low Deflection Package** (F-450/F-550 only)

**Payload Plus Upgrade Package** (F-550 only)

**Snow Plow Prep Package** (restrictions apply)



# XL/XLT



Argent-Painted Steel  
18" Standard on F-350 SRW XL  
17" Optional on F-350 SRW XL



18" Cast-Aluminum  
Standard on F-350 SRW XLT



17" Argent-Painted Steel  
Standard on F-350 DRW XL & XLT



19.5" Argent-Painted Steel  
Standard on F-450/F-550 DRW XL & XLT



17" Polished Forged-Aluminum  
Optional on F-350 DRW XL & XLT



19.5" Polished Forged-Aluminum  
Optional on F-450/F-550 DRW XLT

# LARIAT



17" Polished Forged-Aluminum  
Standard on F-350 DRW



18" 6-Spoke Cast-Aluminum  
Standard on F-350 SRW



19.5" Polished Forged-Aluminum  
Standard on F-450/F-550 DRW



# XL/XLT/LARIAT



## Exteriors

## Interiors

	XL	XLT	LARIAT
White Platinum Metallic Tri-coat <sup>1</sup>			4, 5
Oxford White	1, 2	2, 3	4, 5
Ingot Silver Metallic	1, 2	2	5
Sterling Grey Metallic	1, 2	2	5
Pale Adobe Metallic <sup>2</sup>	1, 2	2, 3	4, 5
Golden Bronze Metallic		3	4, 5
Vermillion Red	1, 2	2, 3	5
Autumn Red Metallic <sup>3</sup>		3	4, 5
Dark Blue Pearl Metallic	1, 2	2	5
Forest Green Metallic	1, 2	2, 3	4, 5
Black <sup>3</sup>	1, 2	2, 3	4, 5

<sup>1</sup>Additional charge. <sup>2</sup>Restrictions apply. <sup>3</sup>New for 2012.  
Colours are representative only. See your Ford of Canada Dealer for actual paint/trim options.

	Regular Cab	SuperCab	Crew Cab	40/20/40 split front seat	40/mini-console/40 front bucket seats	40/console/40 front bucket seats
XL	○	○	○	●	○	
XLT	○	○	○	●		○
LARIAT		○	○	●		○

● Standard ○ Optional



# TECHNICAL SPECIFICATIONS

## 5TH-WHEEL TOWING — MAXIMUM LOADED TRAILER WEIGHT RATINGS kg (lbs.)<sup>1</sup>

ENGINE	Axle Ratio	GCWR	F-350 SRW 4x2	F-350 DRW 4x2	F-350 SRW 4x4	F-350 DRW 4x4	F-450 DRW 4x2	F-450 DRW 4x4	F-550 DRW 4x2	F-550 DRW 4x4
<b>Regular Cab</b>										
6.2L 2-valve V8 gas FFV	3.73	8,618 (19,000)	5,625 (12,400)	—	5,443 (12,000)	—	—	—	—	—
	4.30	8,845 (19,500)	—	6,033 (13,300)	—	5,398 (11,900)	—	—	—	—
		9,979 (22,000)	6,985 (15,400)	—	6,804 (15,000)	—	—	—	—	—
		10,206 (22,500)	—	7,394 (16,300)	—	6,759 (14,900)	—	—	—	—
6.8L 3-valve V10 gas	4.88	11,794 (26,000)	—	—	—	—	8,301 (18,300)	8,165 (18,000)	8,301 (18,300)	8,165 (18,000)
6.7L V8 diesel	3.73	10,660 (23,500)	7,348 (16,200)	—	7,076 (15,600)	—	—	—	—	—
	4.10	11,113 (24,500)	—	7,530 (16,600)	—	7,303 (16,100)	—	—	—	—
		11,113 (24,500)	—	7,530 (16,600)	—	7,303 (16,100)	—	—	—	—
	4.30	11,794 (26,000)	—	—	—	—	7,983 (17,600)	7,802 (17,200)	7,983 (17,600)	7,802 (17,200)
		13,608 (30,000) <sup>2</sup>	—	—	—	—	9,798 (21,600)	9,616 (21,200)	—	—
	4.88	15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	12,066 (26,600)	11,884 (26,200)
15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	—	7,893 (17,400)	7,711 (17,000)	
15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	—	11,975 (26,400)	11,794 (26,000)	
<b>SuperCab</b>										
6.2L 2-valve V8 gas FFV	3.73	8,618 (19,000)	5,489 (12,100)	—	5,262 (11,600)	—	—	—	—	—
	4.30	8,845 (19,500)	—	5,443 (12,000)	—	5,216 (11,500)	—	—	—	—
		9,979 (22,000)	6,849 (15,100)	—	6,623 (14,600)	—	—	—	—	—
		10,206 (22,500)	—	6,804 (15,000)	—	6,577 (14,500)	—	—	—	—
6.8L 3-valve V10 gas	4.88	11,794 (26,000)	—	—	—	—	8,119 (17,900)	7,938 (17,500)	8,119 (17,900)	7,938 (17,500)
6.7L V8 diesel	3.73	10,660 (23,500)	7,076 (15,600)	—	6,895 (15,200)	—	—	—	—	—
	4.10	11,113 (24,500)	—	7,348 (16,200)	—	7,122 (15,700)	—	—	—	—
		11,113 (24,500)	—	7,348 (16,200)	—	7,122 (15,700)	—	—	—	—
	4.30	11,794 (26,000)	—	—	—	—	7,757 (17,100)	7,575 (16,700)	7,757 (17,100)	7,575 (16,700)
		13,608 (30,000) <sup>2</sup>	—	—	—	—	9,571 (21,100)	9,390 (20,700)	—	—
	4.88	15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	11,839 (26,100)	11,658 (25,700)
15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	—	7,666 (16,900)	7,530 (16,600)	
15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	—	11,748 (25,900)	11,612 (25,600)	
<b>Crew Cab</b>										
6.2L 2-valve V8 gas FFV	3.73	8,618 (19,000)	5,352 (11,800)	—	5,171 (11,400)	—	—	—	—	—
	4.30	8,845 (19,500)	—	5,307 (11,700)	—	5,126 (11,300)	—	—	—	—
		9,979 (22,000)	6,713 (14,800)	—	6,486 (14,300)	—	—	—	—	—
		10,206 (22,500)	—	6,668 (14,700)	—	6,486 (14,300)	—	—	—	—
6.8L 3-valve V10 gas	4.88	11,794 (26,000)	—	—	—	—	8,029 (17,700)	7,847 (17,300)	8,029 (17,700)	7,847 (17,300)
6.7L V8 diesel	3.73	10,660 (23,500)	6,940 (15,300)	—	6,759 (14,900)	—	—	—	—	—
	4.10	11,113 (24,500)	—	7,258 (16,000)	—	7,031 (15,500)	—	—	—	—
		11,113 (24,500)	—	7,258 (16,000)	—	7,031 (15,500)	—	—	—	—
	4.30	11,794 (26,000)	—	—	—	—	7,666 (16,900)	7,484 (16,500)	7,666 (16,900)	7,484 (16,500)
		13,608 (30,000) <sup>2</sup>	—	—	—	—	9,480 (20,900)	9,299 (20,500)	—	—
	4.88	15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	11,748 (25,900)	11,567 (25,500)
15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	—	7,575 (16,700)	7,394 (16,300)	
15,876 (35,000) <sup>2</sup>	—	—	—	—	—	—	—	11,658 (25,700)	11,476 (25,300)	

<sup>1</sup>F-350 DRW/F-450/F-550 weights shown are for 140.8" wheelbase Regular Cab or 176.2" wheelbase Crew Cab models. For 164.8" 188.5" 200.2" and 200.8" wheelbase models, weights may be somewhat less (usually not more than 90.8 kg [200 lbs.], or 181.4 kg [400 lbs.] with 200.8" wheelbase). <sup>2</sup>Requires optional High-Capacity Trailer Tow Package.

**NOTE:** Load rating represents the maximum allowable weight of people, cargo and body equipment, and is reduced by the weight of optional equipment.



# TECHNICAL SPECIFICATIONS

## MECHANICAL

<b>Front Suspension</b>	
Type	Twin-I-Beam (F-350 4x2); solid twin-coil monobeam axle (F-350 4x4, F-450/F-550)
Axle (rating @ ground)	2,381 kg (5,250 lbs.) (F-350 4x2); 2,722 kg (6,000 lbs.) (F-350 4x4); 3,175 kg (7,000 lbs.) (F-450/F-550)
Springs	Coil
Shock absorbers	35-mm (1.38") gas-type
Stabilizer bar	Standard
<b>Rear Suspension</b>	
Type	Solid axle
Axle (rating @ ground)	3,302 kg (7,280 lbs.) (F-350 SRW); 4,423 kg (9,750 lbs.) (F-350 DRW); 6,196 kg (13,660 lbs.) (F-450/F-550)
Springs	Leaf
Shock absorbers	35-mm (1.38") gas-type
Stabilizer bar	Standard
<b>Steering</b>	
Type	Haltenberger linkage (4x2); cross-tie linkage (4x4)
Assist	Power
Overall ratio	20.49:1 (F-350 4x2); 20.41:1 (F-350 4x4); 17.8:1 average (F-450/F-550)
<b>Brakes</b>	
Type	4-wheel vented-disc ABS (standard)
<b>Front</b>	
Rotor diameter	347 mm (13.66") (F-350); 369 mm (14.53") (F-450/F-550)
Lining area sq. cm (sq. in.)	225.1 (34.9) (F-350); 358.7 (55.6) (F-450/F-550)
<b>Rear</b>	
Rotor diameter	340 mm (13.39") (F-350); 390 mm (15.35") (F-450/F-550)
Lining area sq. cm (sq. in.)	246.4 (38.2) (F-350); 358.7 (55.6) (F-450/F-550)
<b>Wheels</b>	
Type	Steel (standard); aluminum (optional)
Size	17" DRW, 18" SRW (F-350); 19.5" (F-450/F-550)
Number of studs	8 (F-350); 10 (F-450/F-550)
Bolt-circle diameter	170 mm (6.7") (F-350 SRW); 200 mm (7.87") (F-350 DRW); 225 mm (8.85") (F-450/F-550)

## INTERIOR DIMENSIONS mm (in.)

	Regular Cab	SuperCab	Crew Cab
<b>Front</b>			
Head room	1,034 (40.7)	1,034 (40.7)	1,034 (40.7)
Shoulder room	1,727 (68.0)	1,727 (68.0)	1,727 (68.0)
Hip room	1,717 (67.6)	1,717 (67.6)	1,717 (67.6)
Leg room	1,044 (41.1)	1,044 (41.1)	1,044 (41.1)
<b>Rear</b>			
Head room	—	968 (38.1)	1,036 (40.8)
Shoulder room	—	1,730 (68.1)	1,727 (68.0)
Hip room	—	1,709 (67.3)	1,717 (67.6)
Leg room	—	803 (31.6)	1,069 (42.1)

## POWERTRAINS

	6.7L V8 Turbo Diesel	6.2L V8 Gas	6.8L V10 Gas
Configuration	OHV (32-valve)	SOHC	SOHC
Fuel injection	High-pressure common-rail Electronic	Sequential electronic Electronic	Sequential electronic Electronic
Engine control system	Electronic	Electronic	Electronic
Induction system	Single-sequential turbocharger; charged air cooler	Specially tuned	Specially tuned
Battery	Dual 12-volt; 750-CCA/78-amp	12-volt; 650-CCA/72-amp	12-volt; 650-CCA/72-amp
Alternator	157-amp (single 200-amp or dual combined 357-amp, optional)	157-amp	157-amp
Cooling system	Pressurized series flow	Pressurized series flow	Pressurized series flow
Oil-life monitor	Intelligent Oil-Life Monitor™	Oil-minder system	Oil-minder system
Cylinders	8	8	10
Cylinder heads	Aluminum	Aluminum	Aluminum
Block material	Compacted graphite iron	Cast iron	Cast iron
Valve operation	Push rod/rocker arms	Roller-rocker shafts	Hydraulic roller
Camshaft drive	Gear	Silent chain	Silent chain
Bore	3.90"	4.02"	3.55"
Stroke	4.25"	3.74"	4.17"
Compression ratio	16.2:1	9.8:1	9.2:1
Horsepower/rpm	300 @ 2,800	385 @ 5,500 <sup>1</sup>	362 @ 4,750
Torque lb.-ft./rpm	660 @ 1,600	405 @ 4,500 <sup>1</sup>	457 @ 3,250
Recommended fuel	Ultra-low-sulfur diesel or B20	Regular unleaded or E85	Regular unleaded

<sup>1</sup>Certified to SAE J1349. 385 hp and 405 lb.-ft. of torque under 4,536 kg (10,000 lbs.) GVWR. 316 hp and 397 lb.-ft. of torque over 4,536 kg (10,000 lbs.) GVWR.

## TRANSMISSION

Type	TorqShift® 6-speed SelectShift Automatic® (6.7L diesel, 6.2L gas)	5-speed TorqShift automatic (6.8L gas)
Case material	Aluminum	Aluminum
PTO	Live-drive access on driver's side (diesel only)	Access on driver's side
Gear ratios	1st 3.97:1 2nd 2.32:1 3rd 1.52:1 4th 1.15:1 5th 0.86:1 6th 0.67:1 Reverse 3.13:1	1st 3.11:1 2nd 2.20:1 3rd 1.55:1 4th 1.00:1 5th 0.71:1 6th — Reverse 2.88:1

Reduce maximum trailer weight by the weight of passengers and cargo carried in the tow vehicle. Check with your sales consultant.

**Conventional towing notes:** Trailer tongue load weight should be 10-15% of total loaded trailer weight. Make sure vehicle payload (reduced by option weight) will accommodate trailer tongue load weight and weight of passengers and cargo added to towing vehicle. Addition of trailer tongue load weight, and weight of passengers and cargo, cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle's Safety Compliance Certification Label.

**5th-wheel towing notes:** Trailer kingpin weight should be 15-25% of total loaded trailer weight. Make sure vehicle payload (reduced by option weight) will accommodate trailer kingpin weight and weight of passengers and cargo added to the towing vehicle. Addition of trailer kingpin weight, and weight of passengers and cargo, cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle's Safety Compliance Certification Label.



# TECHNICAL SPECIFICATIONS

## DIMENSIONS & WEIGHTS

	Regular Cab										
	F-350 SRW	F-350 DRW	F-350 DRW	F-450 DRW	F-450 DRW	F-450 DRW	F-450 DRW	F-550 DRW	F-550 DRW	F-550 DRW	F-550 DRW
Wheelbase mm (in.)	3,576 (140.8)	3,576 (140.8)	4,186 (164.8)	3,576 (140.8)	4,186 (164.8)	4,796 (188.8)	5,100 (200.8)	3,576 (140.8)	4,186 (164.8)	4,796 (188.8)	5,100 (200.8)
Max. GVWR kg (lbs.) <sup>1</sup>											
4x2	4,990 (11,000)	6,033 (13,300)	6,033 (13,300)	7,484 (16,500)	7,484 (16,500)	7,484 (16,500)	7,484 (16,500)	8,845 (19,500)	8,845 (19,500)	8,845 (19,500)	8,845 (19,500)
4x4	5,035 (11,100)	6,033 (13,300)	6,033 (13,300)	7,484 (16,500)	7,484 (16,500)	7,484 (16,500)	7,484 (16,500)	8,845 (19,500)	8,845 (19,500)	8,845 (19,500)	8,845 (19,500)
Max. Payload kg (lbs.) <sup>1</sup>											
4x2	2,157 (4,756)	3,407 (7,512)	3,271 (7,212)	4,526 (9,977)	4,446 (9,847)	4,358 (9,607)	4,317 (9,518)	5,594 (12,332)	5,757 (12,692)	5,671 (12,503)	5,644 (12,442)
4x4	1,931 (4,256)	3,120 (6,878)	3,074 (6,777)	4,393 (9,685)	4,322 (9,421)	4,188 (9,232)	4,183 (9,222)	5,329 (11,749)	5,604 (12,355)	5,515 (12,159)	5,481 (12,083)
Overall Length mm (in.)	5,753 (226.5)	5,753 (226.5)	6,363 (250.5)	5,753 (226.5)	6,363 (250.5)	6,972 (274.5)	7,277 (286.5)	5,753 (226.5)	6,363 (250.5)	6,972 (274.5)	7,277 (286.5)
Top of cab to ground – empty mm (in.)											
4x2	1,953 (76.9)	1,963 (77.3)	1,963 (77.3)	2,040 (80.3)	2,042 (80.4)	2,047 (80.6)	2,047 (80.6)	2,042 (80.4)	2,050 (80.7)	2,050 (80.7)	2,055 (80.9)
4x4	2,029 (79.9)	2,040 (80.3)	2,040 (80.3)	2,042 (80.4)	2,042 (80.4)	2,042 (80.4)	2,045 (80.5)	2,045 (80.5)	2,045 (80.5)	2,050 (80.7)	2,050 (80.7)
Top of frame to ground – empty mm (in.)											
4x2	813 (32.0)	828 (32.6)	820 (32.3)	843 (33.2)	838 (33.0)	833 (32.8)	833 (32.8)	856 (33.7)	848 (33.4)	846 (33.3)	843 (33.2)
4x4	869 (34.2)	881 (34.7)	869 (34.2)	848 (33.4)	838 (33.0)	836 (32.9)	833 (32.8)	859 (33.8)	848 (33.4)	843 (33.2)	843 (33.2)
Width between frame rails mm (in.)	866 (34.1)	866 (34.1)	866 (34.1)	869 (34.2)	869 (34.2)	869 (34.2)	869 (34.2)	869 (34.2)	869 (34.2)	869 (34.2)	869 (34.2)
Axle clearance mm (in.)	208 (8.2)	208 (8.2)	206 (8.1)	206 (8.1)	206 (8.1)	206 (8.1)	206 (8.1)	213 (8.4)	213 (8.4)	213 (8.4)	213 (8.4)
Front track mm (in.)	1,735 (68.3)	1,735 (68.3)	1,735 (68.3)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)
Rear tire outside width mm (in.)	2,022 (79.6)	2,342 (92.2)	2,342 (92.2)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)

<sup>1</sup>When properly equipped.

**NOTE:** Load rating represents the maximum allowable weight of people, cargo and body equipment, and is reduced by the weight of optional equipment.

## DIMENSIONS & WEIGHTS

	SuperCab						Crew Cab					
	F-350 SRW	F-350 DRW	F-450 DRW	F-450 DRW	F-550 DRW	F-550 DRW	F-350 SRW	F-350 DRW	F-450 DRW	F-450 DRW	F-550 DRW	F-550 DRW
Wheelbase mm (in.)	4,110 (161.8)	4,110 (161.8)	4,110 (161.8)	4,719 (185.8)	4,110 (161.8)	4,719 (185.8)	4,475 (176.2)	4,475 (176.2)	4,475 (176.2)	5,085 (200.2)	4,475 (176.2)	5,085 (200.2)
Max. GVWR kg (lbs.) <sup>2</sup>												
4x2	5,216 (11,500)	6,033 (13,300)	7,484 (16,500)	7,484 (16,500)	8,845 (19,500)	8,845 (19,500)	5,216 (11,500)	6,033 (13,300)	7,484 (16,500)	7,484 (16,500)	8,845 (19,500)	8,845 (19,500)
4x4	5,216 (11,500)	6,033 (13,300)	7,484 (16,500)	7,484 (16,500)	8,845 (19,500)	8,845 (19,500)	5,216 (11,500)	6,033 (13,300)	7,484 (16,500)	7,484 (16,500)	8,845 (19,500)	8,845 (19,500)
Max. Payload kg (lbs.) <sup>2</sup>												
4x2	2,183 (4,813)	3,156 (6,958)	4,334 (9,555)	4,219 (9,301)	5,631 (12,414)	5,555 (12,246)	2,053 (4,526)	3,038 (6,698)	4,243 (9,355)	4,185 (9,227)	5,570 (12,280)	5,464 (12,045)
4x4	1,978 (4,361)	2,932 (6,463)	4,186 (9,228)	4,094 (9,025)	5,464 (12,046)	5,424 (11,958)	1,853 (4,085)	2,842 (6,266)	4,086 (9,009)	4,027 (8,878)	5,367 (11,832)	5,318 (11,723)
Overall Length mm (in.)	6,287 (247.5)	6,287 (247.5)	6,287 (247.5)	6,896 (271.5)	6,287 (247.5)	6,896 (271.5)	6,652 (261.9)	6,652 (261.9)	6,652 (261.9)	7,262 (285.9)	6,652 (261.9)	7,262 (285.9)
Top of cab to ground – empty mm (in.)												
4x2	1,948 (76.7)	1,956 (77.0)	2,040 (80.3)	2,042 (80.4)	2,042 (80.4)	2,045 (80.5)	1,974 (77.7)	1,981 (78.0)	2,047 (80.6)	2,047 (80.6)	2,052 (80.8)	2,055 (80.9)
4x4	2,024 (79.7)	2,035 (80.1)	2,040 (80.3)	2,042 (80.4)	2,042 (80.4)	2,045 (80.5)	2,045 (80.5)	2,052 (80.8)	2,047 (80.6)	2,047 (80.6)	2,052 (80.8)	2,052 (80.8)
Top of frame to ground – empty mm (in.)												
4x2	805 (31.7)	818 (32.2)	836 (32.9)	833 (32.8)	848 (33.4)	846 (33.3)	798 (31.4)	815 (32.1)	836 (32.9)	833 (32.8)	846 (33.3)	843 (33.2)
4x4	851 (33.5)	866 (34.1)	833 (32.8)	831 (32.7)	846 (33.3)	843 (33.2)	846 (33.3)	864 (34.0)	833 (32.8)	831 (32.7)	846 (33.3)	843 (33.2)
Width between frame rails mm (in.)	866 (34.1)	866 (34.1)	869 (34.2)	869 (34.2)	869 (34.2)	869 (34.2)	798 (31.4)	866 (34.1)	869 (34.2)	869 (34.2)	869 (34.2)	869 (34.2)
Axle clearance mm (in.)	218 (8.6)	208 (8.2)	203 (8.0)	203 (8.0)	213 (8.4)	213 (8.4)	218 (8.6)	208 (8.2)	203 (8.0)	203 (8.0)	213 (8.4)	213 (8.4)
Front track mm (in.)	1,735 (68.3)	1,735 (68.3)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)	1,735 (68.3)	1,735 (68.3)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)	1,900 (74.8)
Rear tire outside width mm (in.)	2,022 (79.6)	2,342 (92.2)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)	2,022 (79.6)	2,342 (92.2)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)	2,385 (93.9)

<sup>2</sup>When properly equipped.

**NOTE:** Load rating represents the maximum allowable weight of people, cargo and body equipment, and is reduced by the weight of optional equipment.





# QUALITY, GREEN, SAFE AND SMART.



## Our commitment to you: Peace-of-Mind Protection

- Basic Coverage: 3 years/60,000 km
- Gas Engine Powertrain Limited Warranty: 5 years/100,000 km
- Diesel Engine Powertrain Limited Warranty: 5 years/160,000 km
- Corrosion Warranty: 5 years/unlimited distance
- Roadside Assistance: 5 years/100,000 km

Certain conditions apply. For more information on these warranties and coverages, ask your local Ford of Canada Dealer or visit [ford.ca](http://ford.ca).

**Ford Extended Service Plan.** Help protect your investment and add to your peace of mind by complementing your vehicle purchase or lease with a Ford Extended Service Plan (ESP). Ford ESP protects you against unexpected repair costs after your New Vehicle Basic Warranty expires by covering many vehicle components. It's confidence for the road ahead. See your Ford of Canada Dealer for details. **Ford Credit.** Get the ride you want. Whether you plan to lease or finance, you'll find the choices that are right for you at Ford Credit. Ask your local Ford of Canada Dealer for details or check us out at [fordcredit.ca](http://fordcredit.ca). **For prompt, courteous answers to your questions: Ford Customer Relationship Centre 1-800-565-3673; Ford Credit Customer Service Centre: 1-877-636-7346.**

Competitive comparisons are based on 2011/2012 competitive models, publicly available information and Ford data at the time of printing of the 2012 original printed version. Some features discussed may be optional. Vehicles shown may contain optional equipment. Features shown may be offered only in combination with other options or subject to additional ordering requirements or limitations. Dimensions shown may vary due to optional features and/or production variability. Following publication of the 2012 original printed brochure, certain changes in standard equipment, options and the like, or product delays may have occurred which would not be included in these pages. Your Ford of Canada Dealer is your best source for up-to-date information. Ford Motor Company of Canada, Limited, reserves the right to change product specifications at any time without incurring obligations. Colours may not be exactly as illustrated. Please see your sales consultant for specific colour and model availability. Body Manufacturers are responsible for compliance certification of the completed vehicle. The Ford New Truck Limited Warranty and any government certification made by Ford shall cover only the vehicle as manufactured by Ford and shall not extend to any addition, modification or change of or to the vehicle by the Ford Authorized Pool Account.