

2020  
**TRAILERING GUIDE**

---



# WE'VE GENERATED QUITE A FOLLOWING



Every GMC is a reminder that the same passion and purpose that drive you also drive us. Together, we're setting our own standards and proving that Professional Grade isn't merely a label, it's a way of life. What follows are the capabilities of the entire GMC lineup that make us all pros.

This guide will help you select the GMC model that's right for your trailering needs. It also contains helpful tips for loading, driving and parking with your trailer.


**Pro tip:** Hover over key words to reveal hyperlinks. Clicking these will allow you to quickly navigate through the guide.

## TABLE OF CONTENTS

<b>MAXIMUM TRAILER WEIGHT RATING</b>	1	<b>TERRAIN</b>	32
<b>SIERRA HEAVY DUTY</b>	2	OVERVIEW	33
OVERVIEW	3	TRAILERING CAPABILITY AND POWERTRAIN SPECIFICATIONS	34
TRAILERING CAPABILITY	4	VEHICLE DIMENSIONS	35
TRAILERING CAPABILITY (10,000-LB GVWR OR LESS)	5	<b>SAVANA</b>	36
POWERTRAIN SPECIFICATIONS	6	CARGO VAN OVERVIEW	37
VEHICLE DIMENSIONS	7	CARGO VAN TRAILERING CAPABILITY	38
CHASSIS CAB OVERVIEW	8	PASSENGER VAN OVERVIEW	39
CHASSIS CAB TRAILERING CAPABILITY	9	PASSENGER VAN TRAILERING CAPABILITY	40
CHASSIS CAB VEHICLE DIMENSIONS	10	CARGO/PASSENGER VANS POWERTRAIN SPECIFICATIONS	41
<b>SIERRA 1500</b>	11	CUTAWAY OVERVIEW	42
OVERVIEW	12	CUTAWAY TRAILERING CAPABILITY	43
TRAILERING CAPABILITY	13	CUTAWAY POWERTRAIN SPECIFICATIONS	44
POWERTRAIN SPECIFICATIONS	15	VEHICLE DIMENSIONS	45
VEHICLE DIMENSIONS	16	<b>TRAILERING TECHNOLOGY</b>	46
<b>CANYON</b>	17	CAMERA SYSTEM	47
OVERVIEW	18	HIGHLIGHTS	48
TRAILERING CAPABILITY	19	AVAILABILITY	49
POWERTRAIN SPECIFICATIONS	20	<b>TRAILERING TERMINOLOGY</b>	50
VEHICLE DIMENSIONS	21	<b>TRAILER HITCH TYPES</b>	51
<b>YUKON AND YUKON XL</b>	22	<b>TRAILER TYPES</b>	52
OVERVIEW	23	<b>TRAILERING INFORMATION LABEL</b>	53
TRAILERING CAPABILITY	24		
POWERTRAIN SPECIFICATIONS	25		
VEHICLE DIMENSIONS	26		
<b>ACADIA</b>	27		
OVERVIEW	28		
TRAILERING CAPABILITY	29		
POWERTRAIN SPECIFICATIONS	30		
VEHICLE DIMENSIONS	31		

VEHICLE COMPARISON

# MAXIMUM TRAILER WEIGHT RATING (LBS)<sup>1</sup>

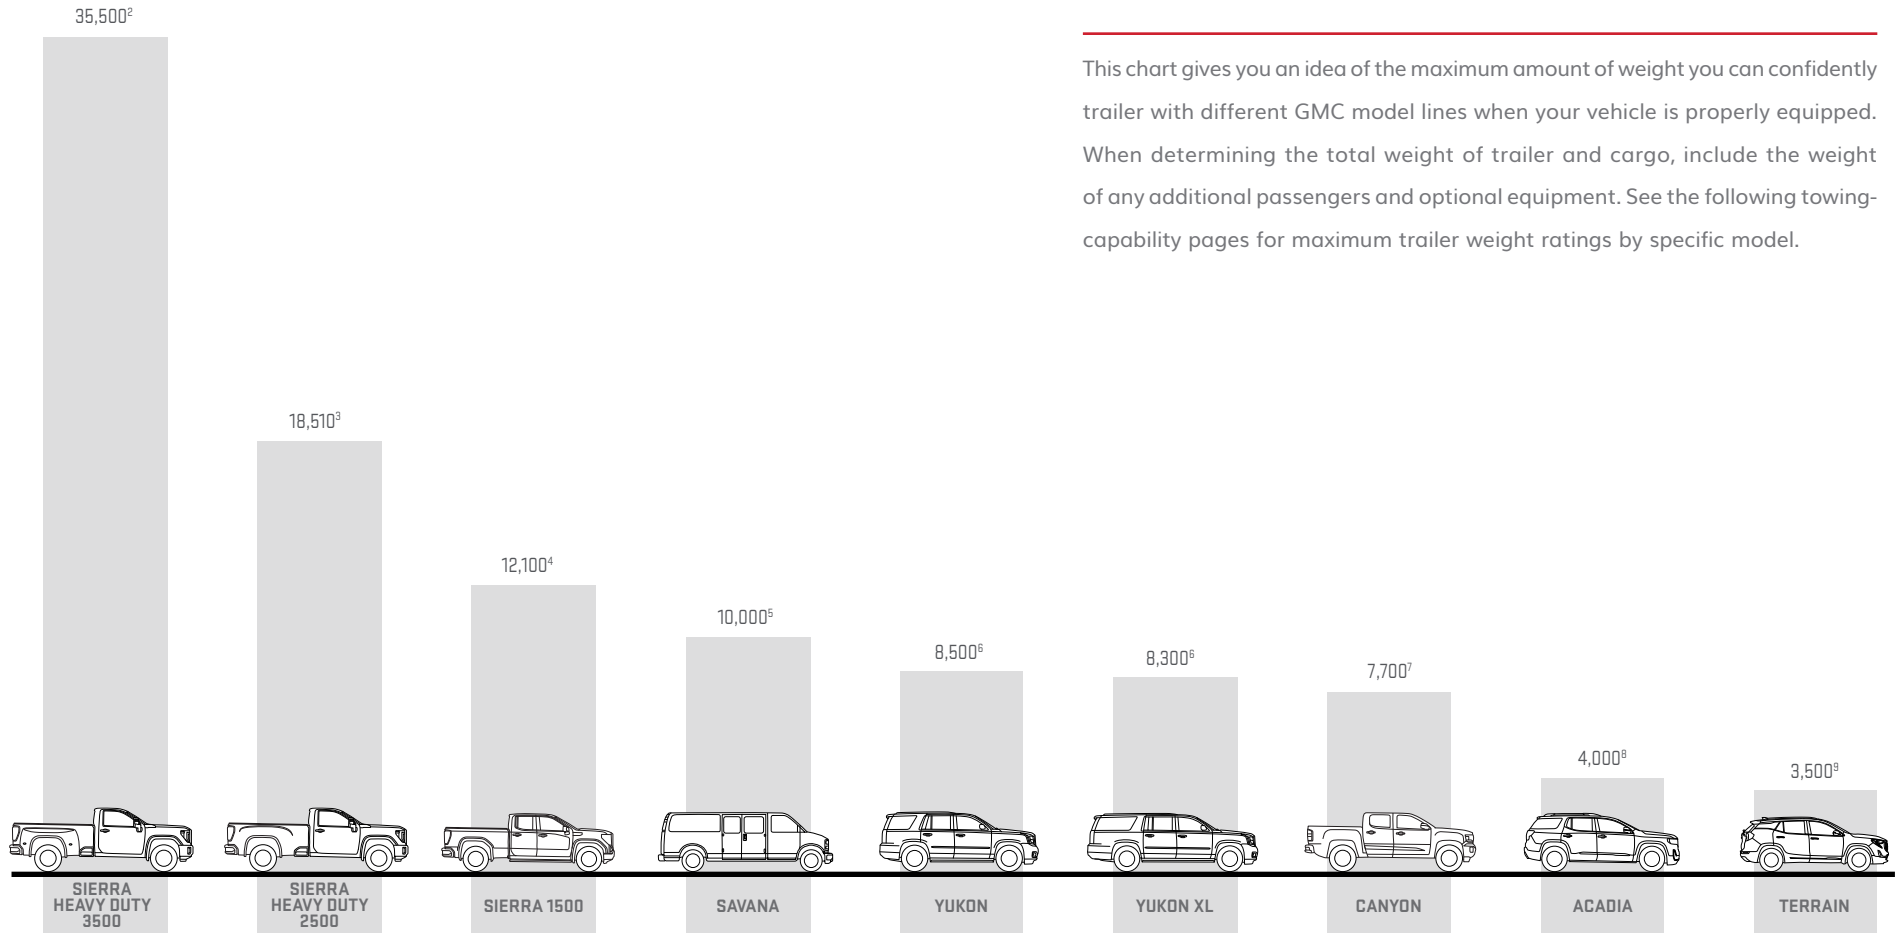

This chart gives you an idea of the maximum amount of weight you can confidently trailer with different GMC model lines when your vehicle is properly equipped. When determining the total weight of trailer and cargo, include the weight of any additional passengers and optional equipment. See the following towing-capability pages for maximum trailer weight ratings by specific model.

<sup>1</sup>Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>2</sup>35,500-lb rating requires a properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and gooseneck hitch. <sup>3</sup>18,510-lb rating requires a properly equipped 2500 HD Regular Cab long bed 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and fifth-wheel or gooseneck hitch. <sup>4</sup>Sierra's 12,100-lb rating requires a properly equipped Sierra SLT Double Cab 4WD model with available 6.2L V8 engine and Max Trailering Package. <sup>5</sup>10,000-lb rating requires a properly equipped Savana Cargo Van model with available 6.0L V8 engine and Trailering Equipment Package. <sup>6</sup>Requires 2WD model with available Heavy-Duty Trailering Package. <sup>7</sup>7,700-lb rating requires 2WD Canyon SLE Crew Cab model with available Duramax 2.8L I4 Diesel engine, Driver Alert Package, SLE Convenience Package, automatic locking rear differential and Trailering Package. <sup>8</sup>Requires available 3.6L V6 engine and Trailering Package. <sup>9</sup>Requires available 2.0L engine and trailering equipment.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 2

# 2020 SIERRA HEAVY DUTY

---



## OVERVIEW

# NEXT GENERATION SIERRA HEAVY DUTY



### KEY TRAILERING FEATURES

- HEAVY-DUTY TRAILERING, UP TO 35,500 LBS<sup>1</sup> (MAX TRAILERING AS SHOWN 21,300 LBS<sup>2</sup>)
- FIRST HEAVY-DUTY PICKUP IN ITS CLASS WITH AN AVAILABLE ALLISON® 10-SPEED AUTOMATIC TRANSMISSION
- UP TO 15 AVAILABLE CAMERA VIEWS<sup>3</sup> INCLUDING INDUSTRY-FIRST TRANSPARENT TRAILER VIEW
- AVAILABLE PROGRADE™ TRAILERING SYSTEM WITH IN-VEHICLE TRAILERING APP<sup>4</sup>
- AVAILABLE TRACTION SELECT SYSTEM WITH TOW/HAUL MODE
- SMART TRAILER INTEGRATION
- AVAILABLE HEAD-UP DISPLAY AND REAR CAMERA MIRROR<sup>5</sup>
- AVAILABLE WORLD'S FIRST SIX-FUNCTION GMC MULTIPRO™ TAILGATE

### KEY SPECIFICATIONS

- MAXIMUM GOOSENECK TRAILERING 35,500 LBS<sup>1</sup>
- MAXIMUM FIFTH-WHEEL TRAILERING 32,000 LBS<sup>6</sup>
- MAXIMUM CONVENTIONAL TRAILERING 20,000 LBS<sup>7</sup>
- MAXIMUM HORSEPOWER 445<sup>8</sup>
- MAXIMUM TORQUE 910 LB-FT<sup>8</sup>
- MAXIMUM PAYLOAD 7,442 LBS<sup>9</sup>
- MAXIMUM CARGO BED VOLUME 83.5 CU. FT.<sup>10</sup>
- 12 CARGO TIE-DOWNS RATED AT 500 LBS<sup>11</sup> PER CORNER
- MAXIMUM SEATING CAPACITY OF SIX<sup>12</sup>

### POWERTRAIN

- AVAILABLE 6.6L DURAMAX TURBO DIESEL V8 PAIRED WITH AN ALLISON 10-SPEED AUTOMATIC TRANSMISSION
- ALL-NEW 6.6L GAS V8 ENGINE PAIRED WITH 6L90 6-SPEED AUTOMATIC TRANSMISSION

<sup>1</sup>35,500-lb rating requires properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and gooseneck hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>2</sup>Requires properly equipped 3500 HD Crew Cab SRW standard bed 4WD model with available 6.6L Duramax Turbo Diesel and fifth-wheel or gooseneck hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>3</sup>Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details. <sup>4</sup>App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. <sup>5</sup>Read the vehicle Owner's Manual for important feature limitations and information. <sup>6</sup>32,000-lb rating requires properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and fifth-wheel hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>7</sup>Requires properly equipped 3500 HD Crew Cab model with available 6.6L Duramax Turbo Diesel engine. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>8</sup>Requires available 6.6L Duramax Turbo Diesel engine. <sup>9</sup>Requires properly equipped 3500 HD Regular Cab DRW long bed 2WD model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>10</sup>Requires long bed model. Cargo and load capacity limited by weight and distribution. <sup>11</sup>Cargo and load capacity limited by weight and distribution. <sup>12</sup>Requires Double Cab or Crew Cab model with front 40/20/40 bench seat.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

# NEXT GENERATION SIERRA HEAVY DUTY

DURAMAX TURBO DIESEL SPECIFICATIONS								GAS ENGINE SPECIFICATIONS							
Model	Cab	Bed	Max GCWR (lbs) <sup>1</sup>	Max Conventional Hitch (lbs) <sup>2</sup>	Max Fifth-Wheel Hitch (lbs) <sup>2</sup>	Max Gooseneck Hitch (lbs) <sup>2</sup>	Max Payload (lbs) <sup>3</sup>	Model	Cab	Bed	Max GCWR (lbs) <sup>1</sup>	Max Conventional Hitch (lbs) <sup>2</sup>	Max Fifth-Wheel Hitch (lbs) <sup>2</sup>	Max Gooseneck Hitch (lbs) <sup>2</sup>	Max Payload (lbs) <sup>3</sup>
2500	Reg 2WD	Long	26,000	14,500	18,510	18,510	3,715	2500	Reg 2WD	Long	24,000	14,500	17,370	17,370	3,979
	Reg 4WD	Long	26,000	14,500	18,190	18,190	3,650		Reg 4WD	Long	24,000	14,500	17,060	17,060	3,965
	Double 2WD	Standard	26,000	14,500	18,200	18,200	3,561		Double 2WD	Standard	24,000	14,500	17,050	17,050	3,762
	Double 4WD	Standard	26,000	14,500	17,890	17,890	3,546		Double 4WD	Standard	24,000	14,500	16,740	16,740	3,747
	Double 2WD	Long	26,000	14,500	18,040	18,040	3,595		Double 2WD	Long	24,000	14,500	16,930	16,930	3,792
	Double 4WD	Long	26,000	14,500	17,750	17,750	3,657		Double 4WD	Long	24,000	14,500	16,650	16,650	3,854
	Crew 2WD	Standard	27,500	18,500	18,500	18,500	3,553		Crew 2WD	Standard	24,000	14,500	16,940	16,940	3,751
	Crew 4WD	Standard	27,500	18,500	18,500	18,500	3,563		Crew 4WD	Standard	24,000	14,500	16,650	16,650	3,760
	Crew 2WD	Long	27,500	18,500	18,500	18,500	3,536		Crew 2WD	Long	24,000	14,500	16,840	16,840	3,800
Crew 4WD	Long	27,500	18,500	18,500	18,500	3,597	Crew 4WD	Long	24,000	14,500	16,550	16,550	3,862		
3500 SRW	Reg 2WD	Long	29,700	14,500	21,500	21,500	4,215	3500 SRW	Reg 2WD	Long	24,000	14,500	17,200	17,200	4,481
	Reg 4WD	Long	29,700	14,500	21,500	21,500	4,217		Reg 4WD	Long	24,000	14,500	16,950	16,950	4,534
	Double 2WD	Long	29,700	14,500	21,490	21,490	4,130		Double 2WD	Long	24,000	14,500	16,700	16,700	4,373
	Double 4WD	Long	29,700	14,500	21,210	21,210	4,148		Double 4WD	Long	24,000	14,500	16,500	16,500	4,391
	Crew 2WD	Standard	29,700	20,000	21,500	21,500	4,135		Crew 2WD	Standard	24,000	14,500	16,700	16,700	4,316
	Crew 4WD	Standard	29,700	20,000	21,300	21,300	4,185		Crew 4WD	Standard	24,000	14,500	16,530	16,530	4,365
	Crew 2WD	Long	29,700	20,000	21,330	21,330	4,013		Crew 2WD	Long	24,000	14,500	16,700	16,700	4,333
	Crew 4WD	Long	29,700	20,000	21,040	21,040	4,078		Crew 4WD	Long	24,000	14,500	16,410	16,410	4,398
3500 DRW	Reg 2WD	Long	43,500	20,000	32,000	35,500	6,532	3500 DRW	Reg 2WD	Long	24,000	16,800	16,800	16,800	7,442
	Reg 4WD	Long	40,000	20,000	31,760	31,760	6,196		Reg 4WD	Long	24,000	16,800	16,710	16,710	7,145
	Double 2WD	Long	40,000	20,000	31,500	31,500	6,059		Double 2WD	Long	24,000	16,400	16,400	16,400	6,985
	Double 4WD	Long	40,000	20,000	31,340	31,340	5,777		Double 4WD	Long	24,000	16,390	16,270	16,270	6,703
	Crew 2WD	Long	40,000	20,000	31,400	31,400	5,892		Crew 2WD	Long	24,000	16,300	16,200	16,200	6,894
	Crew 4WD	Long	40,000	20,000	31,180	31,180	5,607		Crew 4WD	Long	24,000	16,300	16,180	16,180	6,610

<sup>1</sup>Gross Combination Weight Rating (GCWR) when properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>2</sup>Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>3</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.

**SMALL BUSINESS OWNERS AND COMMERCIAL DRIVERS: [CLICK HERE FOR CHASSIS AND DE-RATED 2500 OPTIONS.](#)**



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

## TRAILERING CAPABILITY (10,000-LB GVWR OR LESS)

# NEXT GENERATION SIERRA HEAVY DUTY

SPECIFICATIONS									
Model	Cab	Bed	Max GVWR (lbs) <sup>1</sup>	Max GCWR <sup>2</sup> (lbs) <sup>2</sup>	Max Conventional Hitch (lbs) <sup>3</sup>	Max Fifth-Wheel Hitch (lbs) <sup>3</sup>	Max Gooseneck Hitch (lbs) <sup>3</sup>	Max Payload (lbs) <sup>4</sup>	
<b>6.6L V8 Duramax Turbo Diesel</b>									
2500	Double 4WD	Standard	10,000	24,500	14,500	12,610	12,610	2,375	
2500	Double 4WD	Long	10,000	24,500	14,500	11,690	11,690	2,236	
2500	Crew 4WD with 17" wheels	Standard	10,000	26,000	14,500	11,720	11,720	2,241	
2500	Crew 4WD with 18" or 20" wheels	Standard	10,000	26,000	17,850	11,530	11,530	2,213	
2500	Crew 2WD with 17" wheels	Long	10,000	26,000	14,500	12,550	12,550	2,365	
2500	Crew 2WD with 18" or 20" wheels	Long	10,000	26,000	17,970	12,350	12,350	2,336	
2500	Crew 4WD with 17" wheels	Long	10,000	26,000	14,500	10,620	10,620	2,076	
2500	Crew 4WD with 18" or 20" wheels	Long	10,000	26,000	16,560	10,240	10,240	2,047	
<b>6.6L Gas V8 Engine</b>									
2500	Regular 2WD	Long	9,900	24,000	14,500	17,370	17,370	3,757	
2500	Regular 4WD	Long	10,000	24,000	14,500	17,060	17,060	3,544	
2500	Double 2WD	Standard	10,000	24,000	14,500	17,050	17,050	3,541	
2500	Double 4WD	Standard	10,000	24,000	14,500	16,740	16,740	3,226	
2500	Double 2WD	Long	10,000	24,000	14,500	16,930	16,930	3,420	
2500	Double 4WD	Long	10,000	24,000	14,500	16,650	16,650	3,133	
2500	Crew 2WD	Standard	10,000	24,000	14,500	16,940	16,940	3,429	
2500	Crew 4WD	Standard	10,000	24,000	14,500	16,650	16,650	3,139	
2500	Crew 2WD	Long	10,000	24,000	14,500	16,840	16,840	3,329	
2500	Crew 4WD	Long	10,000	24,000	14,500	16,550	16,550	3,040	

The Gross Vehicle Weight Rating (GVWR) and Gross Combined Weight Rating (GCWR) of the Sierra Heavy Duty have increased for 2020. For small businesses and commercial buyers, this change has potential implications for registering your truck.

- Trucks over 10,000 lbs GVWR require a Department of Transportation number.
- Drivers of trucks over 26,000 lbs GCWR also require a Commercial Driver's License.

Contact the U.S. Department of Transportation and your local Department of Transportation to determine whether you may have additional registration or licensing requirements for these trucks.

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Gross Combination Weight Rating (GCWR) when properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>3</sup>Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>4</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

**POWERTRAIN SPECIFICATIONS**

# NEXT GENERATION SIERRA HEAVY DUTY



**ENGINE SPECIFICATIONS**

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
6.6L V8 Turbo Diesel	4.05 x 3.89 / 103 x 99	Cast iron	Cast aluminum	16 : 1	Overhead valve, four valves per cylinder	Common-rail direct fuel injection	445 @ 2800	910 @ 1600
6.6L Gas V8	4.06 x 3.86 / 103.25 x 98	Cast iron with nodular iron main caps	Cast aluminum	10.75 : 1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct fuel injection	401 @ 5200	464 @ 4000

**TRANSMISSION SPECIFICATIONS**

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Tenth	Reverse	Final Drive Ratio
Allison 10-speed automatic (6.6L Turbo Diesel)	10L1000	4.54	2.87	2.06	1.72	1.48	1.26	1.00	0.85	0.69	0.63	4.54	3.42 (6.6L Turbo Diesel)
6L90 6-speed automatic (6.6L gas V8)	6L90	4.03	2.36	1.53	1.15	0.85	0.67	-	-	-	-	3.06	3.73 (6.6L gas V8)



[VEHICLE COMPARISON](#)



[TECHNOLOGY](#)



[TERMINOLOGY](#)




## VEHICLE DIMENSIONS

# NEXT GENERATION SIERRA HEAVY DUTY

### SELECT SIERRA 2500 HEAVY DUTY CAB DIMENSIONS

#### CREW CAB

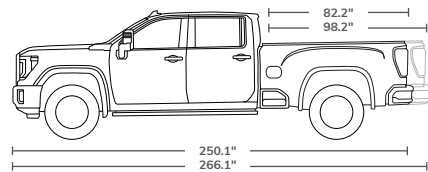


79.7\"-79.8\"

Sierra 2500 Heavy Duty comes in 2WD and 4WD Crew Cab models with a 6' 9\" standard bed or available 8' long bed.

<b>INSIDE BED HEIGHT</b>	<b>GROUND CLEARANCE</b>
21"	10.1"
<b>WHEELBASE</b>	<b>CARGO VOLUME</b>
158.9\"-172"	69.6-83.5 cu. ft. <sup>1</sup>
<b>FRONT/REAR TREAD WIDTH</b>	
68.1\"/68.3"	

#### CREW CAB

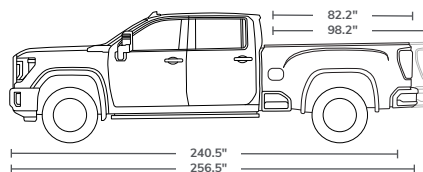


78.8\"-80"

Sierra 3500 Heavy Duty comes in 2WD and 4WD Crew Cab models with either a 6' 9\" standard bed or available 8' long bed. Long bed is available with a SRW or DRW configuration.

<b>INSIDE BED HEIGHT</b>	<b>GROUND CLEARANCE</b>
21"	SRW: 11.1\"-11.2\" DRW: 10.4"
<b>WHEELBASE</b>	<b>CARGO VOLUME</b>
158.9\"-172"	69.6-83.5 cu. ft. <sup>1</sup>
<b>FRONT/REAR TREAD WIDTH</b>	
SRW: 68.1\"/68.3\" DRW: 68.5\"/75"	

#### DOUBLE CAB

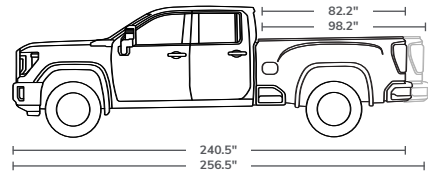


79.8\"-80"

Sierra 2500 Heavy Duty comes in 2WD and 4WD Double Cab models with a 6' 9\" standard bed or available 8' long bed.

<b>INSIDE BED HEIGHT</b>	<b>GROUND CLEARANCE</b>
21"	10.2"
<b>WHEELBASE</b>	<b>CARGO VOLUME</b>
149.4\"-162.5"	69.6-83.5 cu. ft. <sup>1</sup>
<b>FRONT/REAR TREAD WIDTH</b>	
68.1\"/68.3"	

#### DOUBLE CAB

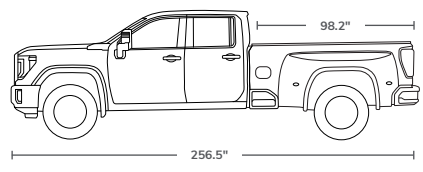


80.2\"-80.9"

Sierra 3500 Heavy Duty comes in 2WD and 4WD Double Cab models with an 8' long bed SRW or DRW configuration.

<b>INSIDE BED HEIGHT</b>	<b>GROUND CLEARANCE</b>
21"	SRW: 11.2\" DRW: 10.4"
<b>WHEELBASE</b>	<b>CARGO VOLUME</b>
162.5"	83.5 cu. ft. <sup>1</sup>
<b>FRONT/REAR TREAD WIDTH</b>	
SRW: 68.1\"/68.3\" DRW: 68.5\"/75"	

#### REGULAR CAB

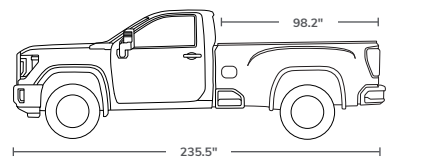


80"

Sierra 2500 Heavy Duty comes in 2WD and 4WD Regular Cab models with an 8' long bed.

<b>INSIDE BED HEIGHT</b>	<b>GROUND CLEARANCE</b>
21"	10.2"
<b>WHEELBASE</b>	<b>CARGO VOLUME</b>
141.6"	83.5 cu. ft. <sup>1</sup>
<b>FRONT/REAR TREAD WIDTH</b>	
68.1\"/68.3"	

#### REGULAR CAB

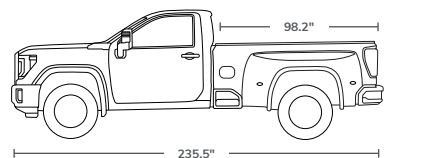

80.2\"-80.9"

Sierra 3500 Heavy Duty comes in 2WD and 4WD Regular Cab models with an 8' long bed SRW or DRW configuration.

<b>INSIDE BED HEIGHT</b>	<b>GROUND CLEARANCE</b>
21"	SRW: 11.2\" DRW: 10.5"
<b>WHEELBASE</b>	<b>CARGO VOLUME</b>
141.6"	83.5 cu. ft. <sup>1</sup>
<b>FRONT/REAR TREAD WIDTH</b>	
SRW: 68.1\"/68.3\" DRW: 68.5\"/75"	

<sup>1</sup>Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

## OVERVIEW

# NEXT GENERATION 2020 SIERRA HEAVY DUTY CHASSIS CAB

GMC | 8



### KEY FEATURES

- STANDARD TRAILERING MIRRORS
- ELECTRIC PARKING BRAKE
- NEW PARK GRADE HOLD ASSIST
- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER
- HILL START ASSIST

### AVAILABLE CUSTOM UPFITS

- DUMP TRUCK
- FLAT BED
- UTILITY/SERVICE BODY
- PLATFORM/STAKE BODY
- SNOWPLOW/SPREADER
- AMBULANCE/RESCUE



### KEY SPECIFICATIONS

- MAXIMUM HORSEPOWER 445<sup>1</sup>
- MAXIMUM TORQUE 910 LB-FT<sup>1</sup>
- MAXIMUM PAYLOAD 7,571 LBS<sup>2</sup>
- MAXIMUM GVWR 14,000 LBS<sup>3</sup>
- MAXIMUM GCWR 40,000 LBS<sup>4</sup>
- MAXIMUM FUEL TANK CAPACITY 63.5 GALLONS (APPROX.)

### POWERTRAIN

- AVAILABLE 6.6L DURAMAX TURBO DIESEL V8 PAIRED WITH AN ALLISON 10-SPEED AUTOMATIC TRANSMISSION
- ALL-NEW STANDARD 6.6L GAS V8 ENGINE WITH HYDRA-MATIC 6L90 6-SPEED AUTOMATIC TRANSMISSION

<sup>1</sup>Requires available 6.6L Duramax Turbo Diesel engine. <sup>2</sup>Requires properly equipped 2WD Regular Cab DRW (60" CA) model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>3</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>4</sup>40,000-lb GCWR requires available 6.6L Duramax Turbo Diesel engine. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

## TRAILERING CAPABILITY

# NEXT GENERATION SIERRA HEAVY DUTY CHASSIS CAB

### SPECIFICATIONS

Cab	Model	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio (lbs)	Max Payload (lbs) <sup>3</sup>
Regular	<b>6.6L Gas V8</b>				
	2WD Regular Cab Dual Rear Wheel (60" CA)	14,000	24,000	3.73	7,571
	4WD Regular Cab Dual Rear Wheel (60" CA)	14,000	24,000	3.73	7,204
	2WD Regular Cab Dual Rear Wheel (84" CA)	14,000	24,000	3.73	7,454
	4WD Regular Cab Dual Rear Wheel (84" CA)	14,000	24,000	3.73	7,159
	<b>6.6L Duramax Turbo Diesel V8</b>				
	2WD Regular Cab Dual Rear Wheel (60" CA)	14,000	40,000	3.42	6,638
	4WD Regular Cab Dual Rear Wheel (60" CA)	14,000	40,000	3.42	6,271
Crew	<b>6.6L Gas V8</b>				
	2WD Crew Cab Dual Rear Wheel (60" CA)	14,000	24,000	3.73	7,040
	4WD Crew Cab Dual Rear Wheel (60" CA)	14,000	24,000	3.73	6,713
	<b>6.6L Duramax Turbo Diesel V8</b>				
	2WD Crew Cab Dual Rear Wheel (60" CA)	14,000	40,000	3.42	6,078
	4WD Crew Cab Dual Rear Wheel (60" CA)	14,000	40,000	3.42	5,751

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>3</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

## VEHICLE DIMENSIONS

# NEXT GENERATION SIERRA HEAVY DUTY CHASSIS CAB

### SIERRA CHASSIS CAB VEHICLE DIMENSIONS

#### SIERRA CHASSIS CAB REGULAR CAB

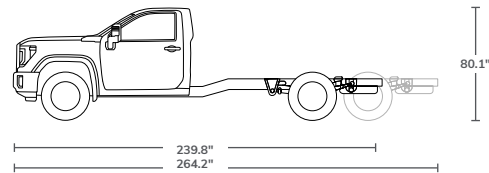


Sierra 3500 HD Chassis Cab allows you to choose from Regular and Crew Cab options.

MAX PAYLOAD	MAX GCWR	MAX GVWR
Regular Cab: 7,571 lbs <sup>1</sup>	40,000 lbs <sup>3</sup>	14,000 lbs <sup>4</sup>
Crew Cab: 7,040 lbs <sup>2</sup>		

<sup>1</sup>Requires properly equipped 2WD Regular Cab DRW (60" CA) model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>2</sup>Requires properly equipped 2WD Crew Cab DRW model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>3</sup>40,000-lb GCWR requires available 6.6L Duramax Turbo Diesel engine. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>4</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment.

#### SIERRA CHASSIS CAB CREW CAB

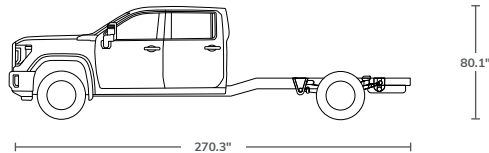

  
VEHICLE COMPARISON

  
TECHNOLOGY

  
TERMINOLOGY

GMC | 11

# 2020 SIERRA 1500

---



# OVERVIEW

# SIERRA 1500



## KEY TRAILERING FEATURES

- UP TO 15 CAMERA VIEWS<sup>1</sup> ARE AVAILABLE
- AVAILABLE GMC PROGRADE TRAILERING SYSTEM WITH IN-VEHICLE TRAILERING APP<sup>2</sup>
- SMART TRAILER INTEGRATION
- AVAILABLE TRACTION SELECT SYSTEM WITH TOW/HAUL MODE
- MULTICOLOR 15" DIAGONAL HEAD-UP DISPLAY IS AVAILABLE
- AVAILABLE WORLD'S FIRST SIX-FUNCTION GMC MULTIPRO TAILGATE

## KEY SPECIFICATIONS

- MAXIMUM CONVENTIONAL TRAILERING 12,100 LBS<sup>3</sup>
- MAXIMUM HORSEPOWER 420<sup>4</sup>
- MAXIMUM TORQUE 460 LB-FT<sup>4</sup>
- MAXIMUM PAYLOAD 2,240 LBS<sup>5</sup>
- MAXIMUM SEATING CAPACITY OF SIX<sup>6</sup>
- MAXIMUM CREW CAB CARGO VOLUME 71.7 CU. FT.<sup>7</sup>

## POWERTRAINS

- AVAILABLE 6.2L V8 WITH 10-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 3.0L TURBO DIESEL WITH 10-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 5.3L V8 WITH 8-SPEED (2WD) OR 10-SPEED (4WD) AUTOMATIC TRANSMISSION
- AVAILABLE 2.7L TURBO WITH 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 5.3L V8 WITH 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 WITH 6-SPEED AUTOMATIC TRANSMISSION

<sup>1</sup>Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details. <sup>2</sup>App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. <sup>3</sup>12,100-lb rating requires properly equipped Double Cab 4WD model with available 6.2L V8 engine and Max Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>4</sup>Requires available 6.2L V8 engine. <sup>5</sup>Requires properly equipped Regular Cab long bed 2WD model with 4.3L V6 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>6</sup>Requires Double Cab or Crew Cab model with front 40/20/40 bench seat. <sup>7</sup>Requires standard bed model. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY

## SIERRA 1500

### SPECIFICATIONS

Engine	Cab	Bed	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Conventional Hitch (lbs) <sup>3</sup>	Max Fifth-Wheel Hitch (lbs) <sup>3</sup>	Max Gooseneck Hitch (lbs) <sup>3</sup>	Max Payload (lbs) <sup>4</sup>
4.3L EcoTec3 V6	Crew 2WD	Short	6,800	12,800	3.42	7,700	7,600	7,600	2,030
	Crew 4WD	Short	7,000	12,800	3.42	7,500	7,400	7,400	2,010
	Crew 2WD	Standard	6,800	12,800	3.42	7,600	7,500	7,500	1,950
	Crew 4WD	Standard	7,000	12,800	3.42	7,400	7,300	7,300	1,960
	Double 2WD	Standard	6,800	12,800	3.42	7,700	7,600	7,600	2,030
	Double 4WD	Standard	7,000	12,800	3.42	7,500	7,400	7,400	2,020
	Regular 2WD	Long	6,800	12,800	3.42	7,900	7,800	7,800	2,240
	Regular 4WD	Long	6,900	12,800	3.42	7,700	7,600	7,600	2,120
2.7L Turbo	Crew 2WD	Short	6,900	12,000	3.42	6,800	6,800	6,800	2,060
	Crew 4WD	Short	7,000	12,000	3.42	6,600	6,600	6,600	2,030
	Crew 2WD	Standard	6,800	12,000	3.42	6,800	6,700	6,700	1,980
	Crew 4WD	Standard	7,000	12,000	3.42	6,600	6,500	6,500	1,990
	Double 2WD	Standard	6,800	12,000	3.42	6,900	6,800	6,800	2,060
	Double 4WD	Standard	7,000	12,000	3.42	6,700	6,600	6,600	2,040
5.3L EcoTec3 V8 (Base Sierra trim only)	Crew 2WD	Short	6,900	15,000	3.42	9,800	9,700	9,700	2,060
	Crew 4WD	Short	7,100	15,000	3.42	9,600	9,500	9,500	2,040
	Crew 2WD	Standard	6,900	15,000	3.42	9,700	9,700	9,700	1,990
	Crew 4WD	Standard	7,100	15,000	3.42	9,500	9,500	9,500	1,990
	Double 2WD	Standard	6,800	15,000	3.42	9,800	9,700	9,700	1,960
	Double 4WD	Standard	7,000	15,000	3.42	9,600	9,500	9,500	1,950
	Regular 2WD	Long	6,800	15,000	3.42	10,000	10,000	10,000	2,180
	Regular 4WD	Long	6,900	15,000	3.42	9,800	9,700	9,700	2,060

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>3</sup>Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>4</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY CONTINUED

## SIERRA 1500

### SPECIFICATIONS

Engine	Cab	Bed	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Conventional Hitch (lbs) <sup>3</sup>	Max Fifth-Wheel Hitch (lbs) <sup>3</sup>	Max Gooseneck Hitch (lbs) <sup>3</sup>	Max Payload (lbs) <sup>4</sup>
5.3L EcoTec3 V8	Crew 2WD	Short	7,100 <sup>5</sup>	16,800 <sup>5</sup>	3.23	9,600	9,100	9,100	2,140 <sup>5</sup>
					3.42	11,300 <sup>5</sup>	10,200 <sup>5</sup>	10,200 <sup>5</sup>	
	Crew 4WD	Short	7,300 <sup>5</sup>	16,800 <sup>5</sup>	3.23	9,200 <sup>5</sup>	8,100 <sup>7</sup>	8,100 <sup>7</sup>	2,120
					3.42	11,100 <sup>5</sup>	8,500 <sup>5</sup>	8,500 <sup>5</sup>	
	Crew 2WD	Standard	7,100 <sup>5</sup>	16,800 <sup>5</sup>	3.23	9,500	8,700	8,700	2,070 <sup>5</sup>
					3.42	11,300 <sup>5</sup>	9,800 <sup>5</sup>	9,800 <sup>5</sup>	
	Crew 4WD	Standard	7,300 <sup>5</sup>	16,800 <sup>5</sup>	3.23	9,200	7,800	7,800	2,080 <sup>5</sup>
					3.42	11,000 <sup>5</sup>	9,600 <sup>5</sup>	9,600 <sup>5</sup>	
	Double 2WD	Standard	7,100 <sup>5</sup>	16,800 <sup>5</sup>	3.23	9,600	8,700	8,700	2,170 <sup>5</sup>
					3.42	11,300 <sup>5</sup>	10,400 <sup>5</sup>	10,400 <sup>5</sup>	
	Double 4WD	Standard	7,300 <sup>5</sup>	16,800 <sup>5</sup>	3.23	9,300	8,300	8,300	2,150 <sup>5</sup>
					3.42	11,100 <sup>5</sup>	10,100 <sup>5</sup>	10,100 <sup>5</sup>	
6.2L EcoTec3 V8	Crew 4WD	Short	7,300 <sup>5</sup>	17,800 <sup>5</sup>	3.23	8,800	7,300 <sup>8</sup>	7,300 <sup>8</sup>	2,000 <sup>5</sup>
					3.42	12,000 <sup>5</sup>	9,800 <sup>5</sup>	9,800 <sup>5</sup>	
	Crew 4WD	Standard	7,300 <sup>5</sup>	17,800 <sup>5</sup>	3.23	9,000	7,000 <sup>9</sup>	7,000 <sup>9</sup>	1,950 <sup>5</sup>
					3.42	12,000 <sup>5</sup>	9,500 <sup>5</sup>	9,500 <sup>5</sup>	
	Double 4WD	Standard	7,300 <sup>5</sup>	17,800 <sup>5</sup>	3.23	9,300	7,400	7,400	2,070 <sup>5</sup>
					3.42	12,100 <sup>5</sup>	10,000 <sup>5</sup>	10,000 <sup>5</sup>	
Duramax 3.0L Turbo Diesel I6	Crew 2WD	Short	7,000	15,000	3.23	7,400	7,300	7,300	1,830
					3.42	9,000	7,000	7,000	
	Crew 4WD	Short	7,200	15,000	3.23	7,300	7,200	7,200	1,750
					3.42	9,000	6,900	6,900	
	Double 2WD	Standard	6,900	15,000	3.23	7,400	7,300	7,300	1,750
					3.42	9,100	7,000	7,000	
Double 4WD	Standard	7,100	15,000	3.23	7,400	7,300	7,300	1,740	
				3.42	9,100	7,000	7,000		

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>3</sup>Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>4</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>5</sup>Requires available Max Trailering Package. <sup>6</sup>AT4 trailering capacity is 9,800 lbs. <sup>7</sup>AT4 trailering capacity is 8,200 lbs. <sup>8</sup>AT4 trailering capacity is 7,600 lbs. <sup>9</sup>AT4 trailering capacity is 7,100 lbs.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY



# POWERTRAIN SPECIFICATIONS

## SIERRA 1500

ENGINE SPECIFICATIONS								
Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
4.3L Gasoline V6	3.92 x 3.62 / 99.6 x 92	Cast aluminum	Cast aluminum	11.0:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct high-pressure fuel injection with Active Fuel Management	285 @ 5300	305 @ 3900
2.7L I4 Turbo Gasoline	3.63 x 4.01 / 92.25 x 102	Cast aluminum	Cast aluminum	10.0:1	Dual-overhead camshafts, four valves per cylinder, tri-power valvetrain with continuously Variable Valve Timing, variable valve lift and Active Fuel Management	Direct high-pressure fuel injection with Active Fuel Management	310 @ 5600	348 @ 1500
5.3L Gasoline V8 (Base Sierra only)	3.78 x 3.62 / 96 x 92	Cast aluminum	Cast aluminum	11.0:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct high-pressure fuel injection with Active Fuel Management	355 @ 5600	383 @ 4100
5.3L Gasoline V8	3.78 x 3.62 / 96 x 92	Cast aluminum	Cast aluminum	11.0:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct high-pressure fuel injection with Dynamic Fuel Management	355 @ 5600	383 @ 4100
6.2L Gasoline V8	4.06 x 3.62 / 103.25 x 92	Cast aluminum	Cast aluminum	11.5:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct high-pressure fuel injection with Dynamic Fuel Management	420 @ 5600	460 @ 4100
3.0L I6 Turbo Diesel	3.30 x 3.54 / 84 x 90	Cast aluminum	Cast aluminum	15.0:1	Dual-overhead camshafts, four valves per cylinder	High-pressure, common-rail direct injection (36,250 psi/2,500 bar); electronic throttle valve	277 @ 3750	460 @ 1500

TRANSMISSION SPECIFICATIONS													
Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Tenth	Reverse	Final Drive Ratio (Standard/Optional)
6L80 6-speed automatic (4.3L, 5.3L w/AFM gas)	6L80 6-speed	4.03	2.36	1.53	1.15	0.85	0.66	--	--	--	--	3.06	3.42/--
8L90 8-speed automatic (2.7L w/DFM gas)	8L90 8-speed	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	--	--	3.82	3.42/--
8L90 8-speed automatic (2WD 5.3L w/DFM gas)	8L90 8-speed	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	--	--	3.82	3.23/3.42
10L80 10-speed automatic (4WD 5.3L gas, 6.2L gas, 3.0L Turbo Diesel)	10L80 10-speed	4.69	2.99	2.15	1.80	1.52	1.28	1.00	0.85	0.69	0.63	4.86	3.23 diesel/ 3.42 gas



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

# VEHICLE DIMENSIONS

## SIERRA 1500

### SELECT SIERRA 1500 CAB DIMENSIONS


#### CREW CAB

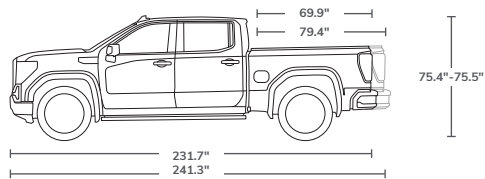

Sierra Crew Cab comes with either a short or available standard bed.

<b>WHEELBASE</b> 147.4"-157"	<b>PASSENGER CAPACITY</b> Seating for up to six
<b>REAR LEG ROOM</b> 43.4"	<b>CARGO VOLUME</b> 62.9-71.7 cu. ft. <sup>1</sup>
<b>FRONT HEAD ROOM</b> 43"	<b>FRONT LEG ROOM</b> 44.5"

#### REGULAR CAB

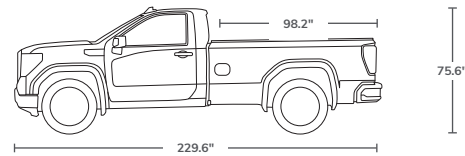


Sierra Regular Cab comes with a long bed.

<b>WHEELBASE</b> 139.6"	<b>PASSENGER CAPACITY</b> Seating for up to three
<b>FRONT SHOULDER ROOM</b> 66.1"	<b>CARGO VOLUME</b> 89.1 cu. ft. <sup>1</sup>
<b>FRONT HEAD ROOM</b> 43.1"	<b>FRONT LEG ROOM</b> 44.5"

<sup>1</sup>Cargo and load capacity limited by weight and distribution.

#### DOUBLE CAB

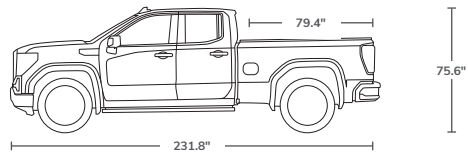

Sierra Double Cab models come with a standard bed.

<b>WHEELBASE</b> 147.4"	<b>PASSENGER CAPACITY</b> Seating for up to six
<b>REAR LEG ROOM</b> 35.2"	<b>CARGO VOLUME</b> 71.7 cu. ft. <sup>1</sup>
<b>FRONT HEAD ROOM</b> 43"	<b>FRONT LEG ROOM</b> 44.5"



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 17

# 2020 CANYON

---



# OVERVIEW CANYON



## KEY TRAILERING FEATURES

- STABILITRAK WITH TRAILER SWAY CONTROL
- AVAILABLE TOW/HAUL MODE
- AVAILABLE AUTOMATIC LOCKING REAR DIFFERENTIAL
- AVAILABLE DIESEL EXHAUST BRAKE
- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER

## KEY SPECIFICATIONS

- MAXIMUM CONVENTIONAL TRAILERING 7,700 LBS<sup>1</sup>
- MAXIMUM HORSEPOWER 308<sup>2</sup>
- MAXIMUM TORQUE 369 LB-FT<sup>3</sup>
- MAXIMUM PAYLOAD 1,609 LBS<sup>4</sup>
- MAXIMUM CARGO VOLUME 49.9 CU. FT.<sup>5</sup>
- MAXIMUM SEATING CAPACITY OF FIVE<sup>6</sup>

## POWERTRAIN

- AVAILABLE 3.6L GAS V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 2.5L 4-CYLINDER GAS ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION

<sup>1</sup>7,700-lb rating requires 2WD Canyon SLE Crew Cab model with available Duramax 2.8L I4 Diesel engine, Driver Alert Package, SLE Convenience Package, automatic locking rear differential and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>2</sup>Requires available 3.6L gas V6 engine. <sup>3</sup>Requires available 2.8L Duramax Turbo Diesel engine. <sup>4</sup>1,609-lb rating requires Base Canyon Crew Cab 2WD model. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>5</sup>Requires long bed model. Cargo and load capacity limited by weight and distribution. <sup>6</sup>Requires Crew Cab model.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY

## CANYON

### SPECIFICATIONS

Engine	Cab	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Conventional Trailer Weight (lbs) <sup>3</sup>	Max Payload (lbs) <sup>4</sup>
2.5L I4	Canyon Crew Cab Short Bed 2WD/4WD	5,500	8,500	4.10	3,500	1,475
	Canyon Extended Cab 2WD	5,400	8,500	4.10	3,500	1,433
	Canyon Extended Cab 4WD	5,600	8,500	4.10	3,500	1,432
3.6L V6	Canyon Crew Cab Short Bed 2WD	5,800	12,000	3.42	7,000 <sup>5</sup>	1,609
	Canyon Crew Cab Short Bed 4WD	6,000	12,000	3.42	7,000 <sup>5</sup>	1,531
	Canyon Crew Cab Long Bed 4WD	6,000	12,000	3.42	7,000 <sup>5</sup>	1,475
	Canyon Extended Cab 2WD	5,700	12,000	3.42	7,000 <sup>5</sup>	1,602
	Canyon Extended Cab 4WD	5,900	12,000	3.42	7,000 <sup>5</sup>	1,562
2.8L Duramax Turbo Diesel	Canyon Crew Cab Short Bed 2WD	6,000	12,700	3.42	7,700	1,496
	Canyon Crew Cab Short Bed 4WD	6,200	12,700	3.42	7,600	1,460
	Canyon Crew Cab Long Bed 4WD	6,200	12,700	3.42	7,550	1,398

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>3</sup>Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>4</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>5</sup>Requires available Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# POWERTRAIN SPECIFICATIONS

## CANYON

### ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
2.5L I4 Gas	3.46 x 3.97 / 88 x 101	Cast aluminum	Cast aluminum	11.3:1	Dual-overhead camshafts with four valves per cylinder; continuously Variable Valve Timing	High-pressure direct fuel injection with electronic throttle control	200 @ 6300	191 @ 4400
3.6L Gas V6	3.74 x 3.37 / 94 x 85.6	Cast aluminum	Cast aluminum	11.5:1	Dual-overhead camshafts with four valves per cylinder; continuously Variable Valve Timing	High-pressure direct fuel injection with electronic throttle control	308 @ 6800	275 @ 4000
2.8L Duramax Turbo Diesel	3.7 x 3.94 / 94 x 100	Gray cast iron	Cast aluminum	16.5:1	Dual-overhead camshafts with four valves per cylinder	Common-rail direct fuel injection	181 @ 3400	369 @ 2000

### TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Reverse	Final Drive Ratio
6L50 6-speed automatic (2.5L gas/2.8L Duramax Turbo Diesel)	6L50	4.06	2.37	1.55	1.16	0.85	0.67	--	--	3.20	4.10 gas 3.42 diesel
8L45 8-speed automatic (3.6L gas)	8L45	4.61	3.04	2.06	1.66	1.26	1.00	0.85	0.66	3.69	3.42



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

# VEHICLE DIMENSIONS

## CANYON

### SELECT CANYON DIMENSIONS


#### CREW CAB

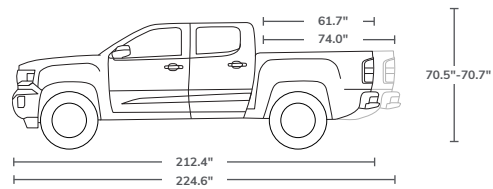

The Canyon Crew Cab model comes in 2WD or 4WD with a short or long bed.

<b>CARGO VOLUME</b> 41.3-49.9 cu. ft. <sup>1</sup>	<b>GVWR</b> 5,400-6,200 lbs <sup>2</sup>
<b>WHEELBASE</b> 128.3"-140.5"	<b>FRONT/REAR LEG ROOM</b> 45.0"/35.8"

#### EXTENDED CAB

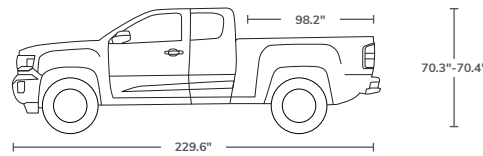

The Canyon Extended Cab model comes in 2WD or 4WD with a 6' 2" bed.

<b>CARGO VOLUME</b> 49.9 cu. ft. <sup>1</sup>	<b>GVWR</b> 5,400-5,900 lbs <sup>2</sup>
<b>WHEELBASE</b> 128.3"	<b>FRONT/REAR LEG ROOM</b> 45.0"/28.6"

<sup>1</sup>Cargo and load capacity limited by weight and distribution. <sup>2</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 22

# 2020 YUKON AND YUKON XL

---





## OVERVIEW

# YUKON AND YUKON XL



### KEY TRAILERING FEATURES

- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER
- AVAILABLE PREMIUM SMOOTH RIDE SUSPENSION PACKAGE WITH AIR LEVELER

### KEY SPECIFICATIONS

- MAXIMUM TRAILERING 8,500 LBS<sup>1</sup> (YUKON)
- MAXIMUM TRAILERING 8,300 LBS<sup>1</sup> (YUKON XL)
- MAXIMUM HORSEPOWER 420<sup>2</sup>
- MAXIMUM TORQUE 460 LB-FT<sup>2</sup>
- MAXIMUM PAYLOAD 1,690 LBS<sup>3</sup>
- MAXIMUM CARGO VOLUME 121.7 CU. FT.<sup>4</sup>
- MAXIMUM SEATING CAPACITY OF NINE<sup>5</sup>

### POWERTRAIN

- 5.3L V8 PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.2L V8 PAIRED WITH A 10-SPEED AUTOMATIC TRANSMISSION

<sup>1</sup>Requires 2WD model with 5.3L V8 engine and available Heavy-Duty Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>2</sup>Requires available 6.2L V8 engine. <sup>3</sup>1,690-lb rating requires short wheelbase 2WD non-Denali model. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>4</sup>Requires XL model; behind first row. Cargo and load capacity limited by weight and distribution. <sup>5</sup>SLE model only.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY

## YUKON AND YUKON XL

YUKON SPECIFICATIONS						YUKON XL SPECIFICATIONS					
Engine	Model	Max GVWR (lbs) <sup>1</sup>	Axle Ratio	Max Trailer Weight Rating (lbs) <sup>2</sup>	Max Payload (lbs) <sup>3</sup>	Engine	Model	Max GVWR (lbs) <sup>1</sup>	Axle Ratio	Max Trailer Weight Rating (lbs) <sup>2</sup>	Max Payload (lbs) <sup>3</sup>
5.3L V8	Yukon 2WD	7,100	3.08	6,500	1,690	5.3L V8	Yukon XL 2WD	7,300	3.08	6,300	1,660
			3.42	8,500 <sup>4</sup>					3.42	8,300 <sup>4</sup>	
	Yukon 4WD	7,300	3.08	6,300	1,650		Yukon XL 4WD	7,500	3.08	6,000	1,630
			3.42	8,200 <sup>4</sup>					3.42	8,000 <sup>4</sup>	
6.2L V8	Yukon Denali 2WD	7,100	3.23	8,400	1,590	6.2L V8	Yukon XL Denali 2WD	7,300	3.23	8,100	1,610
			3.42	8,200 <sup>4</sup>					3.42	8,000 <sup>4</sup>	
	Yukon Denali 4WD	7,300	3.23	8,100	1,530		Yukon XL Denali 4WD	7,500	3.23	7,900	1,510

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>3</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>4</sup>Requires available Heavy-Duty Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# POWERTRAIN SPECIFICATIONS

## YUKON AND YUKON XL

### ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
5.3L V8	3.78 x 3.62 / 96 x 92	Cast aluminum	Cast aluminum	11.0:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct Injection with Active Fuel Management	355 @ 5600	383 @ 4100
6.2L V8	4.06 x 3.62 / 103.25 x 92	Cast aluminum	Cast aluminum	11.5:1	Overhead valve, two valves per cylinder, Variable Valve Timing	Direct Injection with Active Fuel Management	420 @ 5600	460 @ 4100

### TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Tenth	Reverse	Final Drive Ratio (Standard/Optional)
6L80 6-speed automatic (5.3L)	6L80	4.03	2.36	1.53	1.15	0.85	0.67	--	--	--	--	3.06	3.08/3.42
10L80 10-speed automatic (6.2L)	10L80	4.69	2.98	2.14	1.77	1.52	1.27	1.00	0.85	0.69	0.63	4.86	3.23



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

# VEHICLE DIMENSIONS

## YUKON AND YUKON XL

### YUKON DIMENSIONS

#### YUKON

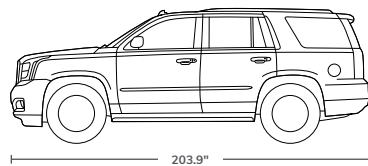

74.4"

203.9"

Yukon comes with three rows of seating and is available in either 2WD or 4WD configurations.

**PASSENGER CAPACITY**  
Seating for up to nine<sup>1</sup>

**LEG ROOM (FIRST/SECOND/THIRD ROW)**  
45.3"/39.0"/24.8"


**CARGO VOLUME (BEHIND FIRST/SECOND/THIRD ROW)**  
94.7/51.7/15.3 cu. ft.<sup>2</sup>

**FUEL TANK CAPACITY**  
Approx. 26.0 gallons

**AXLE RATIO**  
3.08/3.42/3.23

**MAX TRAILERING**  
8,500 lbs<sup>3</sup>

#### YUKON XL



74.4"

224.4"

Yukon XL comes with three rows of seating and additional cargo room and is available in either 2WD or 4WD configurations.

**PASSENGER CAPACITY**  
Seating for up to nine<sup>1</sup>

**LEG ROOM (FIRST/SECOND/THIRD ROW)**  
45.3"/39.7"/34.5"

**CARGO VOLUME (BEHIND FIRST/SECOND/THIRD ROW)**  
121.7/76.7/39.3 cu. ft.<sup>2</sup>

**FUEL TANK CAPACITY**  
Approx. 31.0 gallons

**AXLE RATIO**  
3.08/3.42/3.23

**MAX TRAILERING**  
8,300 lbs<sup>3</sup>

<sup>1</sup>SLE model only. <sup>2</sup>Cargo and load capacity limited by weight and distribution. <sup>3</sup>Requires 2WD model with available Heavy-Duty Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 27

# 2020 ACADIA



# OVERVIEW

# ACADIA



## KEY TRAILERING FEATURE

- AVAILABLE HITCH GUIDANCE WITH HITCH VIEW<sup>1</sup>

## KEY SPECIFICATIONS

- MAXIMUM TRAILERING 4,000 LBS<sup>2</sup>
- MAXIMUM HORSEPOWER 310<sup>3</sup>
- MAXIMUM TORQUE 271 LB-FT<sup>3</sup>
- MAXIMUM CARGO VOLUME 79.0 CU. FT.<sup>4</sup>
- MAXIMUM SEATING CAPACITY OF UP TO SEVEN

## POWERTRAIN

- AVAILABLE NEW 2.0L TURBO
- AVAILABLE 3.6L V6 ENGINE
- 2.5L ENGINE

<sup>1</sup>Read the vehicle Owner's Manual for important feature limitations and information. <sup>2</sup>Requires available 3.6L V6 engine and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>3</sup>Requires available 3.6L V6 engine. <sup>4</sup>Behind first row. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY

## ACADIA

SPECIFICATIONS				
Engine	Model	Max GVWR (lbs) <sup>1</sup>	Axle Ratio	Max Trailer Weight Rating (lbs) <sup>2</sup>
2.5L I4	SL/SLE FWD	6,001	3.80	1,000
2.0L Turbo I4	SLE AWD/SLT	6,001	3.47	1,500
3.6L V6	SLE/SLT/AT4/Denali	6,001	3.49	4,000 <sup>3</sup>

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>3</sup>Requires available Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# POWERTRAIN SPECIFICATIONS

## ACADIA

### ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
2.5L I4	3.46 x 3.97 / 88 x 101	Lost foam cast aluminum	Lost foam cast aluminum	11.3:1	Dual overhead camshafts, four valves per cylinder, continuously Variable Valve Timing	Direct Injection with electronic throttle control	193 @ 6300	188 @ 4400
2.0L Turbo I4	3.26 x 3.63 / 83 x 92.3	Cast aluminum	Cast aluminum	10:1	Dual overhead camshafts, four valves per cylinder with tri-power system	Direct Injection with electronic throttle control	230 @ 5000	258 @ 1500-4000
3.6L V6	3.74 x 3.37 / 95 x 85.8	Cast aluminum with cast-in-place iron bore liners	Cast aluminum	11.5:1	Dual overhead camshafts, four valves per cylinder, continuously Variable Valve Timing	Direct Injection with electronic throttle control	310 @ 6600	271 @ 5000

### TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Reverse	Final Drive Ratio
9T50 9-speed automatic (2.5L)	10:1	4.69	3.31	3.01	2.45	1.92	1.45	1.00	0.75	0.62	2.96	3.80
9T60 9-speed automatic (2.0L)	10:1	4.69	3.31	3.01	2.45	1.92	1.45	1.00	0.75	0.62	2.96	3.47
9T65 9-speed automatic (3.6L)	10:1	4.69	3.31	3.01	2.45	1.92	1.45	1.00	0.75	0.62	2.96	3.49



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY




# VEHICLE DIMENSIONS

## ACADIA

### ACADIA DIMENSIONS

#### ACADIA

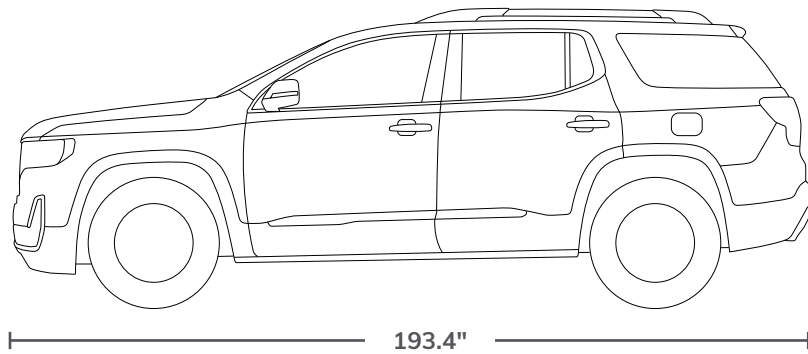

**BASE CURB WEIGHT**  
3,923 lbs

**PASSENGER CAPACITY**  
Seating for up to seven

**HEAD ROOM  
(FIRST/SECOND/THIRD ROW)**  
40.0"/39.6"/37.2"

**MAX TRAILERING**  
4,000 lbs<sup>1</sup>

**CARGO VOLUME  
(BEHIND FIRST/SECOND/  
THIRD ROW)**  
79.0/41.7/12.8 cu. ft.<sup>2</sup>

**LEG ROOM  
(FIRST/SECOND/THIRD ROW)**  
41.0"/39.7"/29.7"

**FUEL TANK CAPACITY  
(FWD/AWD)**  
Approx. 19.0/22.0 gallons

<sup>1</sup>Requires available 3.6L engine and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>2</sup>Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 32

# 2020 TERRAIN



# OVERVIEW

# TERRAIN



## KEY SPECIFICATIONS

- MAXIMUM TRAILERING 3,500 LBS<sup>1</sup>
- MAXIMUM HORSEPOWER 252<sup>2</sup>
- AVAILABLE MAXIMUM TORQUE 260 LB-FT<sup>2</sup>
- MAXIMUM CARGO VOLUME 63.3 CU. FT.<sup>3</sup>
- MAXIMUM SEATING CAPACITY OF FIVE

## POWERTRAIN

- 1.5L TURBO ENGINE
- AVAILABLE 2.0L TURBO ENGINE

<sup>1</sup>Requires available 2.0L engine and trailering equipment. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>2</sup>Requires available 2.0L engine. <sup>3</sup>Behind first row. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY AND POWERTRAIN SPECIFICATIONS

## TERRAIN

SPECIFICATIONS				
Engine	Model	Max GVWR (lbs) <sup>1</sup>	Axle Ratio	Max Trailer Weight Rating (lbs) <sup>2</sup>
1.5L Turbo I4	SL/SLE/SLT FWD	4,464	3.47	1,500
	SLE/SLT AWD	4,630	3.47	1,500
2.0L Turbo I4	SLT/DENALI FWD	4,630	3.17	3,500 <sup>3</sup>
	SLT/DENALI AWD	4,850	3.17	3,500 <sup>3</sup>

ENGINE SPECIFICATIONS								
Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
1.5L Turbo I4	2.93 x 3.409 (74.4 x 86.6)	Cast aluminum	Cast aluminum	10.0:1	Dual overhead camshafts; four valves per cylinder	Direct Injection	170 @ 5600	203 @ 2000-4000
2.0L Turbo I4	3.38 x 3.38 (85.9 x 85.9)	Cast aluminum	Cast aluminum	9.5:1	Dual overhead camshafts; four valves per cylinder	Direct Injection	252 @ 5500	260 @ 2500-4500

TRANSMISSION SPECIFICATIONS												
Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Ninth	Reverse	Final Drive Ratio
9T45 9-speed automatic (1.5L)	9T45	4.69	3.31	3.01	2.44	1.92	1.44	1.00	0.75	0.62	2.96	3.47
9T50 9-speed automatic (2.0L)	9T50	4.69	3.31	3.01	2.44	1.92	1.44	1.00	0.75	0.62	2.96	3.17

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>3</sup>Requires available trailering equipment.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

# VEHICLE DIMENSIONS

## TERRAIN

### TERRAIN DIMENSIONS

#### TERRAIN

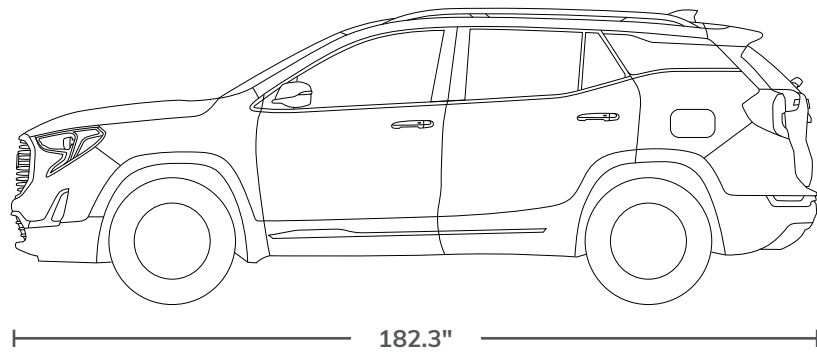

**BASE CURB WEIGHT**  
3,449 lbs

**PASSENGER CAPACITY**  
Seating for up to five

**HEAD ROOM (FIRST/SECOND ROW)**  
40.0"/38.5"

**MAX TRAILERING**  
3,500 lbs<sup>1</sup>

**CARGO VOLUME (BEHIND FIRST/SECOND ROW)**  
63.3/29.6 cu. ft.<sup>2</sup>

**LEG ROOM (FIRST/SECOND ROW)**  
40.9"/39.7"

**FUEL TANK CAPACITY (FWD/AWD)**  
Approx. 14.9/15.6 gallons

<sup>1</sup>Requires available 2.0L engine and trailering equipment. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>2</sup>Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 36

# 2020 SAVANA

---



## OVERVIEW

# SAVANA CARGO VAN



### KEY TRAILERING FEATURES

- 31-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES
- FULL LADDER-TYPE FRAME DESIGN FOR STRENGTH AND DURABILITY

### KEY SPECIFICATIONS

- MAXIMUM CARGO VOLUME 283.6 CU. FT.<sup>1</sup>
- AVAILABLE MAXIMUM SEATING CAPACITY OF FIVE<sup>2</sup>
- MAXIMUM TRAILERING 10,000 LBS<sup>3</sup>
- MAXIMUM GCWR 16,000 LBS<sup>4</sup>

### POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL 4-CYLINDER ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

<sup>1</sup>Requires extended wheelbase model. Cargo and load capacity limited by weight and distribution. <sup>2</sup>Requires available Savana Crew Van Package and swing-out rear side door window glass. <sup>3</sup>10,000-lb trailer rating requires the available 6.0L V8 engine and Trailering Equipment Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>4</sup>16,000-lb GCWR requires the available 6.0L V8 engine and Trailering Equipment Package. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY

## SAVANA CARGO VAN

### SAVANA 2500 SPECIFICATIONS

Engine	Model	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Trailer Weight Rating (lbs) <sup>3</sup>	Max Payload (lbs) <sup>4</sup>
4.3L V6	Regular Wheelbase RWD	8,600	13,000	3.42	7,400	3,280
	Extended Wheelbase RWD	8,600	13,000	3.42	7,100	3,060
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas	Regular Wheelbase RWD	8,600	16,000	3.42	10,000	3,050
	Extended Wheelbase RWD	8,600	16,000	3.42	10,000	2,820
2.8L Duramax Turbo Diesel	Regular Wheelbase RWD	8,600	13,000	3.42	7,000	2,850
	Extended Wheelbase RWD	8,600	13,000	3.42	6,100	2,640

### SAVANA 3500 SPECIFICATIONS

Engine	Model	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Trailer Weight Rating (lbs) <sup>3</sup>	Max Payload (lbs) <sup>4</sup>
4.3L V6	Regular Wheelbase RWD	9,600	13,000	3.42	7,400	4,250
	Extended Wheelbase RWD	9,600	13,000	3.42	7,200	4,060
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas	Regular Wheelbase RWD	9,600	16,000	3.42	10,000	4,020
	Extended Wheelbase RWD	9,600	16,000	3.42	10,000	3,820
2.8L Duramax Turbo Diesel	Regular Wheelbase RWD	9,600	13,000	3.42	6,200	3,820
	Extended Wheelbase RWD	9,600	13,000	3.42	6,000	3,930

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>3</sup>Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>4</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY



## OVERVIEW

# 2020 SAVANA PASSENGER VAN



### KEY TRAILERING FEATURES

- 31-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES
- FULL LADDER-TYPE FRAME DESIGN FOR STRENGTH AND DURABILITY

### KEY SPECIFICATIONS

- MAXIMUM SEATING CAPACITY OF 15<sup>1</sup>
- MAXIMUM CONVENTIONAL TRAILERING 9,600 LBS<sup>2</sup>
- MAXIMUM GCWR 16,000 LBS<sup>3</sup>

### POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL 4-CYLINDER ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

<sup>1</sup>Requires extended wheelbase model and available 15-passenger seating configuration. <sup>2</sup>9,600-lb trailer rating requires regular wheelbase model, available 6.0L V8 engine and Trailering Equipment Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>3</sup>16,000-lb GCWR requires the available 6.0L V8 engine and Trailering Equipment Package. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY

## SAVANA PASSENGER VAN

### SAVANA 2500 SPECIFICATIONS

Engine	Model	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Trailer Weight Rating (lbs) <sup>3</sup>	Max Payload (lbs) <sup>4</sup>
4.3L V6	Regular Wheelbase RWD	8,600	13,000	3.42	6,700	2,550
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas	Regular Wheelbase RWD	8,600	16,000	3.42	9,600	2,390
2.8L Duramax Turbo Diesel	Regular Wheelbase RWD	8,600	13,000	3.42	6,300	2,200

### SAVANA 3500 SPECIFICATIONS

Engine	Model	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Trailer Weight Rating (lbs) <sup>3</sup>	Max Payload (lbs) <sup>4</sup>
4.3L V6	Regular Wheelbase RWD	9,600	13,000	3.42	6,700	3,550
	Extended Wheelbase RWD	9,600	13,000	3.42	6,300	3,210
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas	Regular Wheelbase RWD	9,600	16,000	3.42	9,600	3,390
	Extended Wheelbase RWD	9,600	16,000	3.42	9,200	3,050
2.8L Duramax Turbo Diesel	Regular Wheelbase RWD	9,600	13,000	3.42	5,700	3,200
	Extended Wheelbase RWD	9,600	13,000	3.42	5,300	3,170

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>3</sup>Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. <sup>4</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

## POWERTRAIN SPECIFICATIONS

# SAVANA CARGO/PASSENGER VANS

### ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
4.3L V6 Gasoline	3.92 x 3.62 / 99.6 x 91.9	Aluminum	Aluminum	11.0:1	Overhead valve, two valves per cylinder	Sequential fuel injection	276 @ 5200	298 @ 3900
6.0L V8 Gasoline	4.4 x 3.62 / 111.8 x 91.9	Cast iron	Cast aluminum	9.6:1	Overhead valve, two valves per cylinder	Sequential fuel injection	324 @ 4700	373 @ 4400
6.0L V8 Gaseous	4 x 3.662 / 101.6 x 92	Cast iron	Cast aluminum	9.7:1	Overhead valve, two valves per cylinder	Sequential fuel injection	282 @ 4800	320 @ 4400
2.8L Turbo Diesel	3.7 x 3.937 / 94 x 100	Gray cast iron	Aluminum	16.5:1	Dual overhead camshafts with four valves per cylinder	Common-rail direct fuel injection	181 @ 3400	369 @ 2000

### TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (:1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Reverse	Final Drive Ratio
6L90 6-speed automatic (6.0L gas/gaseous)	6L90	4.03	2.36	1.53	1.15	0.85	0.67	--	--	3.06	3.42
8L90 8-speed automatic (4.3L gas)	8L90	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	3.82	3.42
8-speed automatic with diesel-specific torque converter (2.8L Turbo Diesel)	8L90	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	3.82	3.42



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

## OVERVIEW

# SAVANA CUTAWAY



### KEY FEATURES

- 33-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES

### KEY SPECIFICATIONS

- MAXIMUM SEATING CAPACITY OF TWO
- MAXIMUM PAYLOAD 8,940 LBS<sup>1</sup>
- MAXIMUM GVWR 14,200 LBS<sup>2</sup>
- MAXIMUM FUEL TANK CAPACITY UP TO APPROXIMATELY 57 GALLONS<sup>3</sup>
- MAXIMUM GCWR 20,000 LBS<sup>4</sup>

### POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

<sup>1</sup>Requires properly equipped 4500 Series 159" wheelbase model with 6.0L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>2</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>3</sup>Available feature. See [gmc.com](http://gmc.com) or your dealer for more availability details. <sup>4</sup>Requires 4500 Series model. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING CAPABILITY

## SAVANA CUTAWAY

SAVANA 3500 SPECIFICATIONS					
Engine	Model	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Payload (lbs) <sup>3</sup>
4.3L V6	139" Wheelbase	10,100	13,000	3.42 <sup>4</sup> 3.73 <sup>5</sup>	2,500
	159" Wheelbase	9,900	13,000	3.42 <sup>4</sup> 3.73 <sup>5</sup>	5,270
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gaseous	139" Wheelbase	12,300	16,000	3.42 3.73 <sup>5</sup>	5,150
	159" Wheelbase	12,300	16,000	3.42 3.73 <sup>5</sup>	5,090
	177" Wheelbase	12,300	16,000	3.73 <sup>5</sup>	7,080

SAVANA 4500 SPECIFICATIONS					
Engine	Model	Max GVWR (lbs) <sup>1</sup>	Max GCWR (lbs) <sup>2</sup>	Axle Ratio	Max Payload (lbs) <sup>3</sup>
Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gaseous	159" Wheelbase	14,200	20,000	4.10	8,940
	177" Wheelbase	14,200	20,000	4.10	8,860

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. <sup>3</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. <sup>4</sup>Requires single-rear-wheel configuration. <sup>5</sup>Requires dual-rear-wheel configuration.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# POWERTRAIN SPECIFICATIONS

## SAVANA CUTAWAY

### ENGINE SPECIFICATIONS

Engine	Bore & Stroke (in./mm)	Block Material	Cylinder Head Material	Compression Ratio	Valvetrain	Fuel Delivery	Horsepower	Torque
4.3L Gas V6	3.92 x 3.62 / 99.6 x 91.9	Aluminum	Aluminum	11.0:1	Overhead valve, two valves per cylinder	Sequential fuel injection	276 @ 5200	298 @ 3900
6.0L Gas V8	4.4 x 3.62 / 111.8 x 91.9	Cast iron	Cast aluminum	9.6:1	Overhead valve, two valves per cylinder	Sequential fuel injection	341 @ 5400	373 @ 4200
6.0L Gas V8	4 x 3.662 / 101.6 x 92	Cast iron	Cast aluminum	9.7:1	Overhead valve, two valves per cylinder	Sequential fuel injection	341 @ 5400	373 @ 4200

### TRANSMISSION SPECIFICATIONS

Transmission Type	Gear Ratios (-1)	First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth	Reverse	Final Drive Ratio
6L90 6-speed automatic (6.0L gas)	6L90	4.03	2.36	1.53	1.15	0.85	0.67	--	--	3.06	3.42 <sup>1</sup> /3.73 <sup>2</sup> /4.10 <sup>3</sup>
8L90 8-speed automatic (4.3L gas)	8L90	4.56	2.97	2.08	1.69	1.27	1.00	0.85	0.65	3.82	3.42

<sup>1</sup>3.42 ratio requires single-rear-wheel configuration. <sup>2</sup>3.73 ratio requires dual-rear-wheel configuration. <sup>3</sup>4.10 ratio requires dual-rear-wheel configuration. See your dealer for more availability details.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

# VEHICLE DIMENSIONS

## SAVANA VAN

### SAVANA VEHICLE DIMENSIONS

#### SAVANA 2500 CARGO

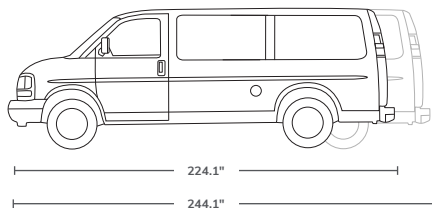


The Savana 2500 Cargo Van offers a regular or extended wheelbase.

**MAX GVWR**  
8,600 lbs<sup>1</sup>

**FUEL TANK CAPACITY**  
Approx. 31 gallons

**MAX PAYLOAD**  
3,280 lbs<sup>2</sup> (regular);  
3,060 lbs<sup>2</sup> (extended)

#### SAVANA 2500 PASSENGER

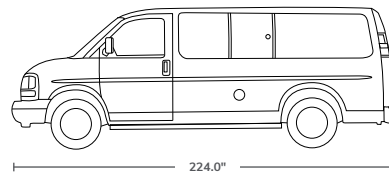


The Savana 2500 Passenger Van offers a regular wheelbase.

**MAX GVWR**  
8,600 lbs<sup>1</sup>

**FUEL TANK CAPACITY**  
Approx. 31 gallons

**MAX PAYLOAD**  
2,550 lbs<sup>2</sup>

#### SAVANA 3500 CARGO

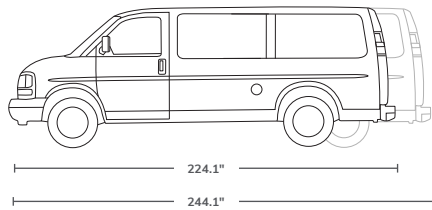


The Savana 3500 Cargo Van offers more payload than the 2500 and comes with a regular or extended wheelbase.

**MAX GVWR**  
9,900 lbs<sup>1</sup>

**FUEL TANK CAPACITY**  
Approx. 31 gallons

**MAX PAYLOAD**  
4,250 lbs<sup>2</sup> (regular);  
4,060 lbs<sup>2</sup> (extended)

#### SAVANA 3500 PASSENGER

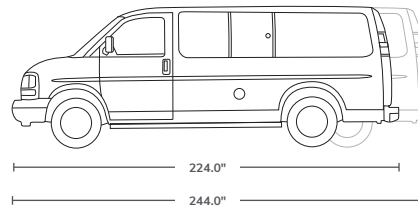


The Savana 3500 Passenger Van offers more payload than the 2500 and comes with a regular or extended wheelbase.

**MAX GVWR**  
9,900 lbs<sup>1</sup>

**FUEL TANK CAPACITY**  
Approx. 31 gallons

**MAX PAYLOAD**  
3,550 lbs<sup>2</sup> (regular);  
3,210 lbs<sup>2</sup> (extended)

#### SAVANA CUTAWAY

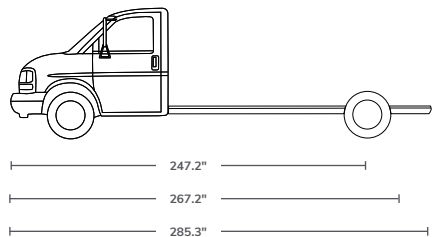

The Savana Cutaway comes with a choice of three wheelbases—139", 159" and 177".

**MAX GVWR**  
9,900-14,200 lbs<sup>1</sup>

**MAX FRONT GAWR**  
4,100-4,600 lbs

**MAX REAR GAWR**  
6,084-7,600 lbs

**FUEL TANK CAPACITY**  
Approx. 33 gallons (standard)  
Approx. 57 gallons (available)

<sup>1</sup>Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. <sup>2</sup>These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING TECHNOLOGY

---






# TRAILERING TECHNOLOGY

## CAMERA SYSTEM

**UP TO 15 AVAILABLE CAMERA VIEWS** Trailering is all about confidence. Assurance that everything is operating as it should, every step of the journey. In the Next Generation Sierra Heavy Duty and Sierra 1500, that faith starts with the available ProGrade Trailering System and the views it offers—you can have up to 15 camera views<sup>1</sup> when equipped with the available Technology Package and accessory cameras and installation. It helps when hooking up your trailer, while on the road and when backing your trailer into place. One of those views is the industry-first available transparent trailer view, which helps you to virtually see right through the trailer to detect objects behind it.

- |                            |                     |                       |  |                        |                                 |
|----------------------------|---------------------|-----------------------|--|------------------------|---------------------------------|
| 1 TRANSPARENT TRAILER VIEW | 4 FRONT CAMERA VIEW | 7 FRONT TOP-DOWN VIEW | 10 FRONT SIDE VIEW                       | 12 REAR TRAILER VIEW   | 14 PICTURE-IN-PICTURE SIDE VIEW |
| 2 HITCH VIEW               | 5 REAR CAMERA VIEW  | 8 REAR TOP-DOWN VIEW  | 11 REAR SIDE VIEW (WITH TRAILER BIASING) | 13 INSIDE TRAILER VIEW | 15 REAR CAMERA MIRROR           |
| 3 BED VIEW                 | 6 SURROUND VIEW     | 9 BOWL VIEW           |  |                        |                                 |

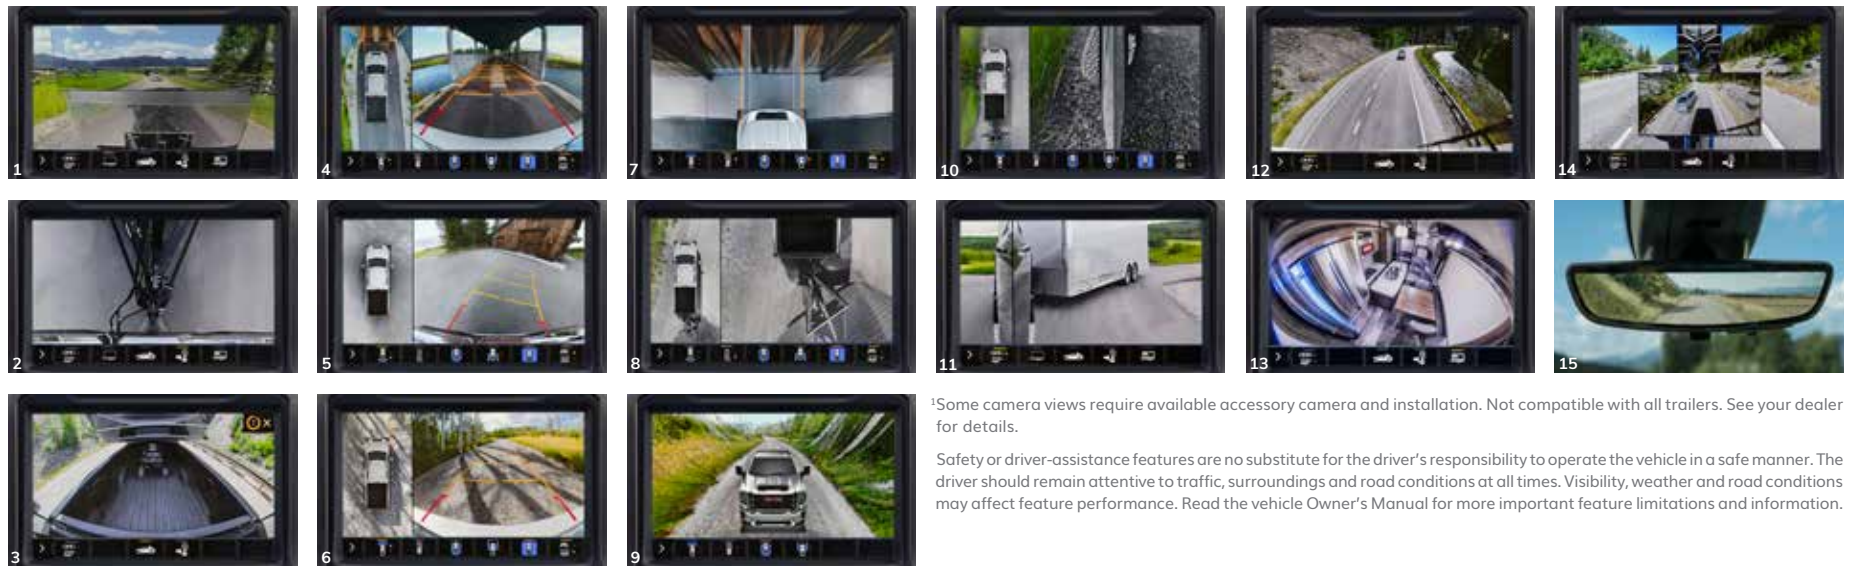

<sup>1</sup>Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details.

Safety or driver-assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. The driver should remain attentive to traffic, surroundings and road conditions at all times. Visibility, weather and road conditions may affect feature performance. Read the vehicle Owner's Manual for more important feature limitations and information.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING TECHNOLOGY HIGHLIGHTS

**PROGRADE TRAILERING SYSTEM** GMC's available ProGrade Trailering System on Sierra 1500 and Sierra Heavy Duty models includes advanced technologies for increased views and confidence. It helps when hooking up your trailer, while on the road and when backing your trailer into place.

■ **IN-VEHICLE TRAILERING APP**<sup>1</sup> Located on the home screen of the infotainment system,<sup>2</sup> this innovation offers customized trailer profiles to track and monitor predeparture checklists, trailer electrical diagnostics (detecting shorts in the trailer lighting circuits, for example), trailer tire pressure and temperature status (if equipped),<sup>3</sup> a Trailer Light Sequence Test, maintenance reminders and more. The Trailering App will also monitor trailer presence, even while the vehicle is off, by periodically checking the trailer lighting circuits. On trailers equipped with LED lights, these periodic checks may cause the trailer lights to flash. This flashing will become more frequent if Theft Alert is enabled.

■ **myGMC APP**<sup>4</sup> The available myGMC app gives you access to features such as creating and managing trailer profiles (shareable with other compatible Sierra owners), a Trailer Light Sequence Test that provides the ability to remotely activate trailer lights to help ensure they're in working order, predeparture checklists (or create your own) and a Trailer Load Calculator to determine the combined weight of your truck and trailer for a confident towing experience. To monitor trailering health, you can view and receive alerts on key components of your trailer such as tire pressure monitoring<sup>3</sup> and trailer miles. There's also a trailering glossary to provide a quick reference to trailering-related materials.

**SMART TRAILER INTEGRATION** Using the available iN•Command<sup>®</sup> Control System<sup>5</sup> from ASA Electronics, select GMC vehicles can give drivers control over eligible trailer functions through the myGMC app<sup>4</sup> or the infotainment system.<sup>2</sup> Similar to the features of a smart home, iN•Command is the central hub of operations to monitor and control an array of systems in compatible

trailers. You can turn on the trailer's air conditioning or water heater, check water and holding tank levels or monitor fuel levels on trailers equipped with generators.

## TRACTION SELECT SYSTEM WITH TOW/HAUL MODE

On select GMC models, this available system allows you to quickly switch to Tow/Haul mode, which adjusts transmission shift points to deliver peak power and trailering performance. On Sierra, the system will retain the Tow/Haul setting configuration for up to 4 hours after it's turned off, eliminating the need to re-engage the system after returning from a brief stop on a long journey.

<sup>1</sup>App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. <sup>2</sup>Functionality varies by model. Full functionality requires compatible Bluetooth<sup>®</sup> and smartphone, and USB connectivity for some devices. <sup>3</sup>Requires available Trailer Tire Pressure Monitoring System and trailer tire pressure monitor sensors. Sensors must be installed by the customer or a third-party service center. <sup>4</sup>Device data connection required. Available on select Apple<sup>®</sup> and Android<sup>™</sup> devices. Some features require active service plan and working electrical system. Service availability, features and functionality vary by vehicle. <sup>5</sup>iN•Command is provided by ASA Electronics and is designed to operate within 30 feet of the trailer. Works with trailers equipped with the iN•Command Control System with GlobalConnect via Bluetooth connection. Control and monitoring functionality varies by trailer manufacturer, model and installed options. Use of the iN•Command Control System feature through the myGMC app requires active service plan. User terms apply. See onstar.com for details and limitations.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING TECHNOLOGY AVAILABILITY

SELECT TRAILERING TECHNOLOGY AVAILABILITY BY VEHICLE										
	Sierra 1500	Sierra 2500 Heavy Duty	Sierra 3500 Heavy Duty	Sierra Chassis Cab	Yukon/ Yukon XL	Canyon	Acadia	Terrain	Savana	Savana Cutaway
● STANDARD ○ AVAILABLE – NOT AVAILABLE										
In-vehicle Trailering App <sup>1</sup>	○	○	○	—	—	—	—	—	—	—
myGMC app <sup>2</sup>	○	○	○	○	○	○	○	○	○	○
Smart Trailer Integration	●	●	●	●	—	—	—	—	—	—
Traction Select System with Tow/Haul mode	○	○	○	○	—	—	○	●	—	—
Auto Electric Parking Brake	●	●	●	●	—	—	—	—	—	—
Park Grade Hold Assist	—	●	●	●	—	—	—	—	—	—
Hill Start Assist	●	●	●	●	●	●	○	●	●	●
Diesel Exhaust Brake System	○	○	○	○	—	○	—	—	○	—
Diesel Engine After-Run	—	○	○	○	—	—	—	—	—	—
Trailering mirrors	○	●	●	●	—	—	—	—	—	—
Integrated Trailer Brake Controller	○	○	○	○	○	○	—	—	—	—
Trailer Sway Control	●	●	●	●	●	●	●	●	●	●
Transmission temperature gauge	●	●	●	●	—	●	—	—	—	—
Hitch Guidance <sup>3</sup>	○	○	○	—	—	○	○	—	—	—
Rear Vision Camera <sup>3</sup>	●	●	●	—	●	●	●	●	●	○
High Definition Surround Vision <sup>3</sup>	○	○	○	—	—	—	○	○	—	—
Trailering Hitch Platform	○	●	●	—	●	○	○	○	○	—
7-wire harness with independent fused trailering circuits	●	●	●	○	●	○	○	○	○	○
7-pin and 4-pin connector	○	●	●	—	● (7-pin)	○ (7-pin)	○ (7-pin)	○ (7-pin)	○	—
Up to 15 camera views, including transparent trailer view <sup>4</sup>	○	○	○	—	—	—	—	—	—	—

<sup>1</sup>App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. <sup>2</sup>Device data connection required. Available on select Apple® and Android devices. Some features require active service plan and working electrical system. Service availability, features and functionality vary by vehicle. <sup>3</sup>Read the vehicle Owner's Manual for important feature limitations and information. <sup>4</sup>Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details.

FOR MORE INFORMATION ON THESE TECHNOLOGIES, VISIT GMC.COM



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING TERMINOLOGY

**CURB WEIGHT:** The weight of a vehicle with all of the standard and optional equipment and a full tank of fuel, but without any passengers or cargo.

**GROSS VEHICLE WEIGHT (GVW):** The combined weight of the vehicle and all passengers and cargo.

**GROSS VEHICLE WEIGHT RATING (GVWR):**  
This number is the maximum amount a tow vehicle may weigh. Everything that contributes to the weight of the tow vehicle is featured in this rating, including the weight of the vehicle, driver and all passengers, fuel, payload, tongue load of the trailer, the weight of the hitch and all optional equipment. The GVWR is displayed on the driver's door or door-lock pillar label of your GMC vehicle. The GVW must never exceed the GVWR.

**GROSS COMBINED WEIGHT RATING (GCWR):**  
The total allowable weight of the completely loaded vehicle and trailer, including any fuel, passengers, cargo, equipment and accessories.

**CARGO WEIGHT:** The weight of all items added to the curb weight of the vehicle, including cargo and optional equipment. When towing, cargo weight also includes the trailer tongue or kingpin weight.

**MAX PAYLOAD:** The maximum allowable weight of passengers plus cargo that the vehicle is designed to carry.

**GROSS AXLE WEIGHT RATING (GAWR):** This is the weight that each axle is capable of supporting. The load on each axle must not exceed the GAWR. The GAWR for each GMC vehicle is displayed on the driver's door or door-lock pillar label.

**GROSS AXLE WEIGHT (GAW):** The total weight placed on a single axle (front or rear).

**GROSS TRAILER WEIGHT:** The weight of a loaded trailer.

**GROSS COMBINED WEIGHT (GCW):** The gross vehicle weight plus the loaded trailer weight.

**TONGUE (OR HITCH) WEIGHT:** The tongue weight is the total amount of trailer weight that is pressing down on the trailer hitch. Keep in mind that the way a trailer is loaded affects the overall tongue weight and will also affect the handling of the tow vehicle when trailering.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

# TRAILERING ON THE ROAD


## TRAILER HITCH TYPES




HITCH BALL ON STEP BUMPER




HITCH BALL ON DRAW BAR



WEIGHT-DISTRIBUTING HITCH



FIFTH-WHEEL HITCH



GOOSENECK HITCH

**SELECTING THE RIGHT HITCH** Choosing the right hitch and making the proper electrical connections affect how your vehicle handles, corners and brakes, and allow you to alert other drivers of your intentions. Before selecting a hitch or trailering package, you should be familiar with the weight ratings specific to your GMC vehicle.

**WEIGHT-CARRYING HITCH** This consists of a hitch ball mounted on a step bumper or draw bar, or a tow eye latched to a pintle hook. Hitch balls are available in a range of sizes. Make sure that the diameter of your hitch ball matches your trailer coupler. Also check that the ball and ball mount meet or exceed the Gross Trailer Weight Rating.

**WEIGHT-DISTRIBUTING HITCH** This is most often used for heavier trailering. This hitch type more evenly distributes the trailer load by using spring bars to shift some of the hitch weight forward onto the tow vehicle's front axle and rearward to the trailer's axles.

**FIFTH-WHEEL HITCH AND GOOSENECK HITCH** These are designed for heavy trailering. Located in the bed of the truck, these hitch types are most frequently used with travel trailers, horse trailers and other large trailers.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# TRAILERING ON THE ROAD

## TRAILER TYPES




---

**CONVENTIONAL TRAILER** While typically used to describe recreational trailers, like campers or boat trailers, conventional trailers generally utilize a ball-type hitch.



---

**FIFTH-WHEEL TRAILER** Fifth-wheel trailers can be slightly larger than conventional trailers and offer a wide range of configurations. These trailers are designed specifically for pickups equipped with a fifth-wheel hitch.

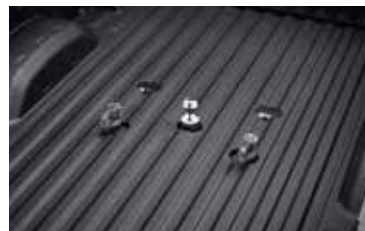

---

**GOOSENECK TRAILER** Gooseneck trailers place the hitch weight of the trailer over the rear axle of the truck rather than the rear bumper.



VEHICLE COMPARISON




TECHNOLOGY



TERMINOLOGY

# TRAILERING INFORMATION LABEL

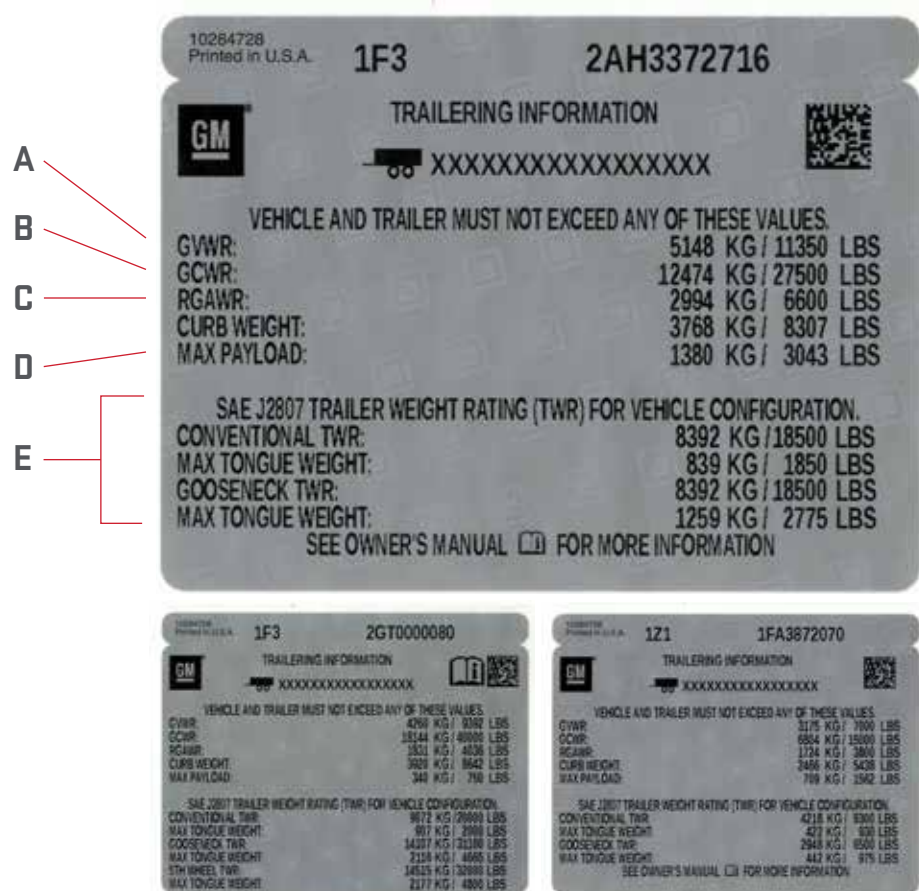

Included on all Sierra 1500 and Sierra Heavy Duty models is a Trailing Information label.

**A GVWR = Gross Vehicle Weight Rating**

This number is the maximum amount a tow vehicle may weigh. Everything that contributes to the weight of the tow vehicle is featured in this rating, including the weight of the vehicle, driver and all passengers, fuel, payload, tongue load of the trailer, the weight of the hitch and all optional equipment. The GVWR is displayed on the driver's door or door-lock pillar label of your GMC vehicle. The Gross Vehicle Weight must never exceed the GVWR.

**B GCWR = Gross Combined Weight Rating**

The total allowable weight of the completely loaded vehicle and trailer, including any fuel, passengers, cargo, equipment and accessories.

**C RGAWR = Rear Gross Axle Weight Rating**

This is the weight that the rear axle is capable of supporting. The load on the axle must not exceed the RGAWR. The RGAWR for each GMC vehicle is displayed on the driver's door or door-lock pillar label.

**D Max Payload**

The maximum allowable weight of passengers plus cargo that the vehicle is designed to carry.

**E TWR = Trailer Weight Rating**

This section of the label provides the ratings for your vehicle's specific configuration.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

# LIVE LIKE A PRO

**TRAILERING WITH YOUR GMC** GMC vehicles are built to be strong and durable to handle the demands of trailering. For available trailering-related equipment, talk to your dealer. You'll need a hitch, of course, and a wide selection of hitch types is available, either as factory equipment or from your dealer. In addition, if you plan to tow frequently, you should consider equipping your GMC vehicle with an available Trailering Package. See your GMC dealer or [gmc.com](http://gmc.com) for model-specific package details and equipment. Please carefully review your GMC Owner's Manual for important safety information about trailering with your vehicle.

**A WORD ABOUT THIS GUIDE** We have tried to make this guide comprehensive and factual. We reserve the right, however, to make changes at any time and without notice, in prices, colors, materials, equipment, specifications, models and availability. Information may have been updated since the time of publication. Please check with your GMC sales professional for complete details. GMC reserves the right to lengthen or shorten the model year for any product for any reason, or to start and end model years at different times. GMC vehicles are equipped with engines produced by different operating units of General Motors, its subsidiaries or suppliers to General Motors worldwide. All competitive claims are based on the latest information available at the time of publication.

©2020 General Motors. All rights reserved. GM, the GM logo, GMC, and the slogans, emblems, vehicle model names, vehicle body designs and other marks appearing in this guide are the trademarks and/or service marks of General Motors, its subsidiaries, affiliates and licensors.



WE ARE PROFESSIONAL GRADE



[GMC.COM](http://GMC.COM)